

DATA COMMUNICATION SOLUTIONS



ZPAS
GROUP

solutions for connections



solutions for connections

ZPAS
GROUP

50 years of design, manufacturing and integration for industries

ZPAS milestones

- 2016 – opening of an electrical assembly plant with an area of 9 000 m² in Nowa Ruda at Piłsudskiego Street
- 2007 – opening of a production plant with an area 3 500 m² in Nowa Ruda at Górnicza Street
- 2007 – opening of a 10 000 m² serial production plant in Nowa Ruda – Słupiec
- 2003 – the Przygórze plant expanded with new production halls and automatic powder coating plant
- 1991 – transformation of the experimental plant into the Network Automation Manufacturing Plant (ZPAS) and privatization of the company – joint stock company established
- 1973 – the former steelworks “Barbara” and buildings of the Przygórze mine “Bolesław” become the seat for the Experimental Department of the Wrocław Power Systems Institute

ZPAS bases its development on investments in human potential and modern machinery. From a small experimental plant located in Przygórze, we have turned into a big company that employs 700 people in four production facilities.

The mission of ZPAS is to be a world leader in the production of ICT enclosures, data centers, industrial and outdoor cabinets. We are an innovative company that provides customers with comprehensive solutions from design to on site implementation.

We put our effort on getting the satisfaction of our customers, employees and suppliers. We care for the environment and the local community by supporting cultural, sports and social development institutions.

We build our success based on values that are important to us: respect, honesty, not-to-blame and uniqueness. In the goals we set for the company, we pay attention to employee satisfaction, teamwork, as well as productivity and profit. In 2023, we celebrate 50 years of our activity.

Piotr Baranowski
CEO of ZPAS S.A.

” People power – the real engine of any business.
Good people are not just crucial to a business.
They are the business themselves!

Richard Branson



See the video:
zpas.pl/qr/f16

ZPAS PRODUCTION PLANTS



Przygórze
ZPAS S.A. Management Board Office, administration and design production plant



Nowa Ruda, Piłsudskiego Street
Manufacturing plant – electrical assembly



Nowa Ruda, Górnicza Street
Outdoor Enclosures Production Plant



Nowa Ruda – Słupiec, Spacerowa Street
Serial production plant and warehouse for finished products





QUALITY AND ENVIRONMENTAL MANAGEMENT SYSTEM







DATA COMMUNICATION SOLUTIONS

Floor-standing cabinets and open racks	9-49
Z-SERVER - server cabinets	10
Cold aisle installations for Z-SERVER cabinets	20
SZB IT - network/server cabinets	24
DSR IT - collocation server cabinets	32
Cold aisle installations for SZB IT and DSR IT cabinets	36
SZE2 PC - computer cabinet IP54	42
SJB - small network cabinet	44
SRD - open rack with fully adjustable 19" frames	48
SRX - open rack with step adjustable 19" frames	49
Wall-mounted cabinets	51-58
Z-BOX - single-section cabinet	52
Z-CUBE - single-section and double-section cabinets	54
Accessories for wall-mounted cabinets	57
Accessories for cabinets and open racks	59-86
Base	60
Shelves	64
19" frame and fixing accessories	68
Baying cabinets in rows, lighting, pockets	72
Earthing elements	73
Roof	74
Masking items	75
Cable management	78
Monitoring and access control	85
Ventilation and air-conditioning	87-93
Ventilation systems	88
Air-conditioning systems	92
Power supply systems	95-110
Power distribution units	96
Comprehensive solutions for data centres	111-114
Scope of offer	112
Examples of server rooms projects	113

FLOOR-STANDING CABINETS AND OPEN RACKS

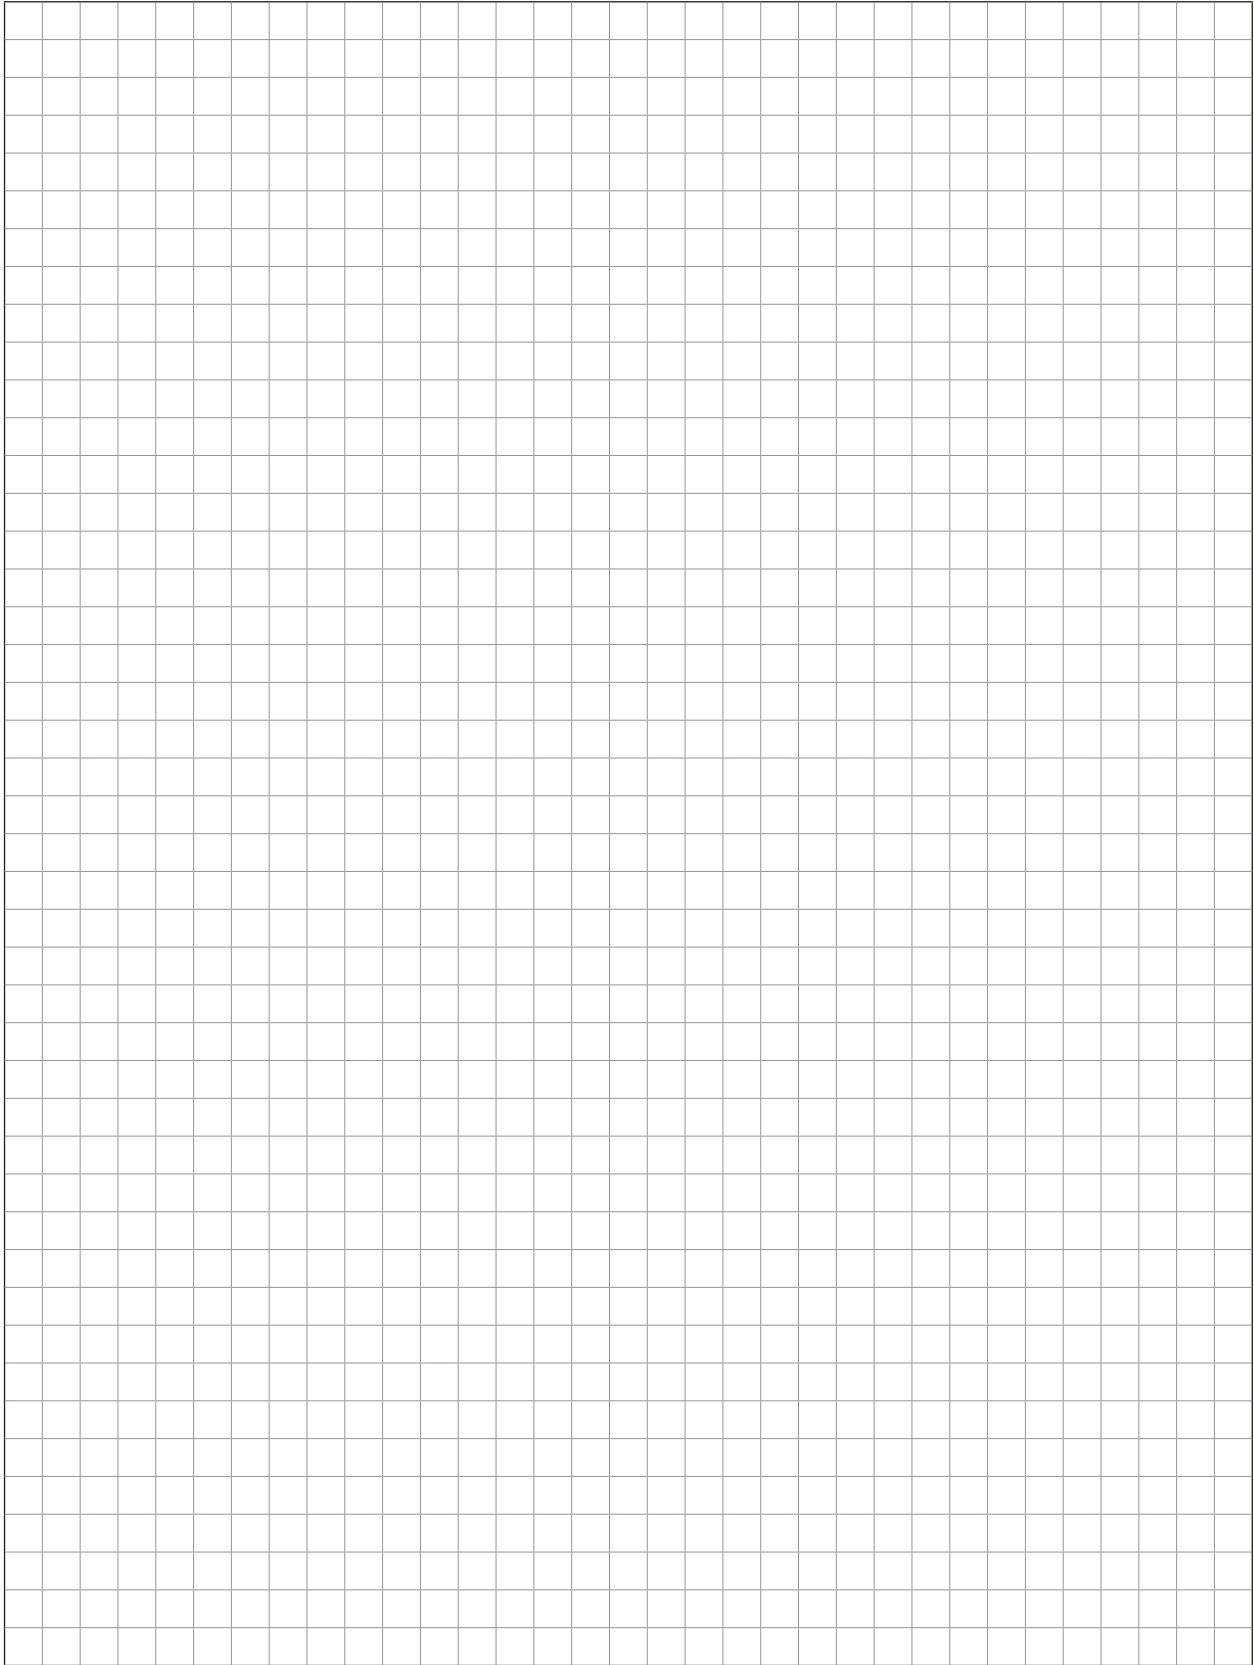

FLOOR-STANDING CABINETS AND OPEN RACKS

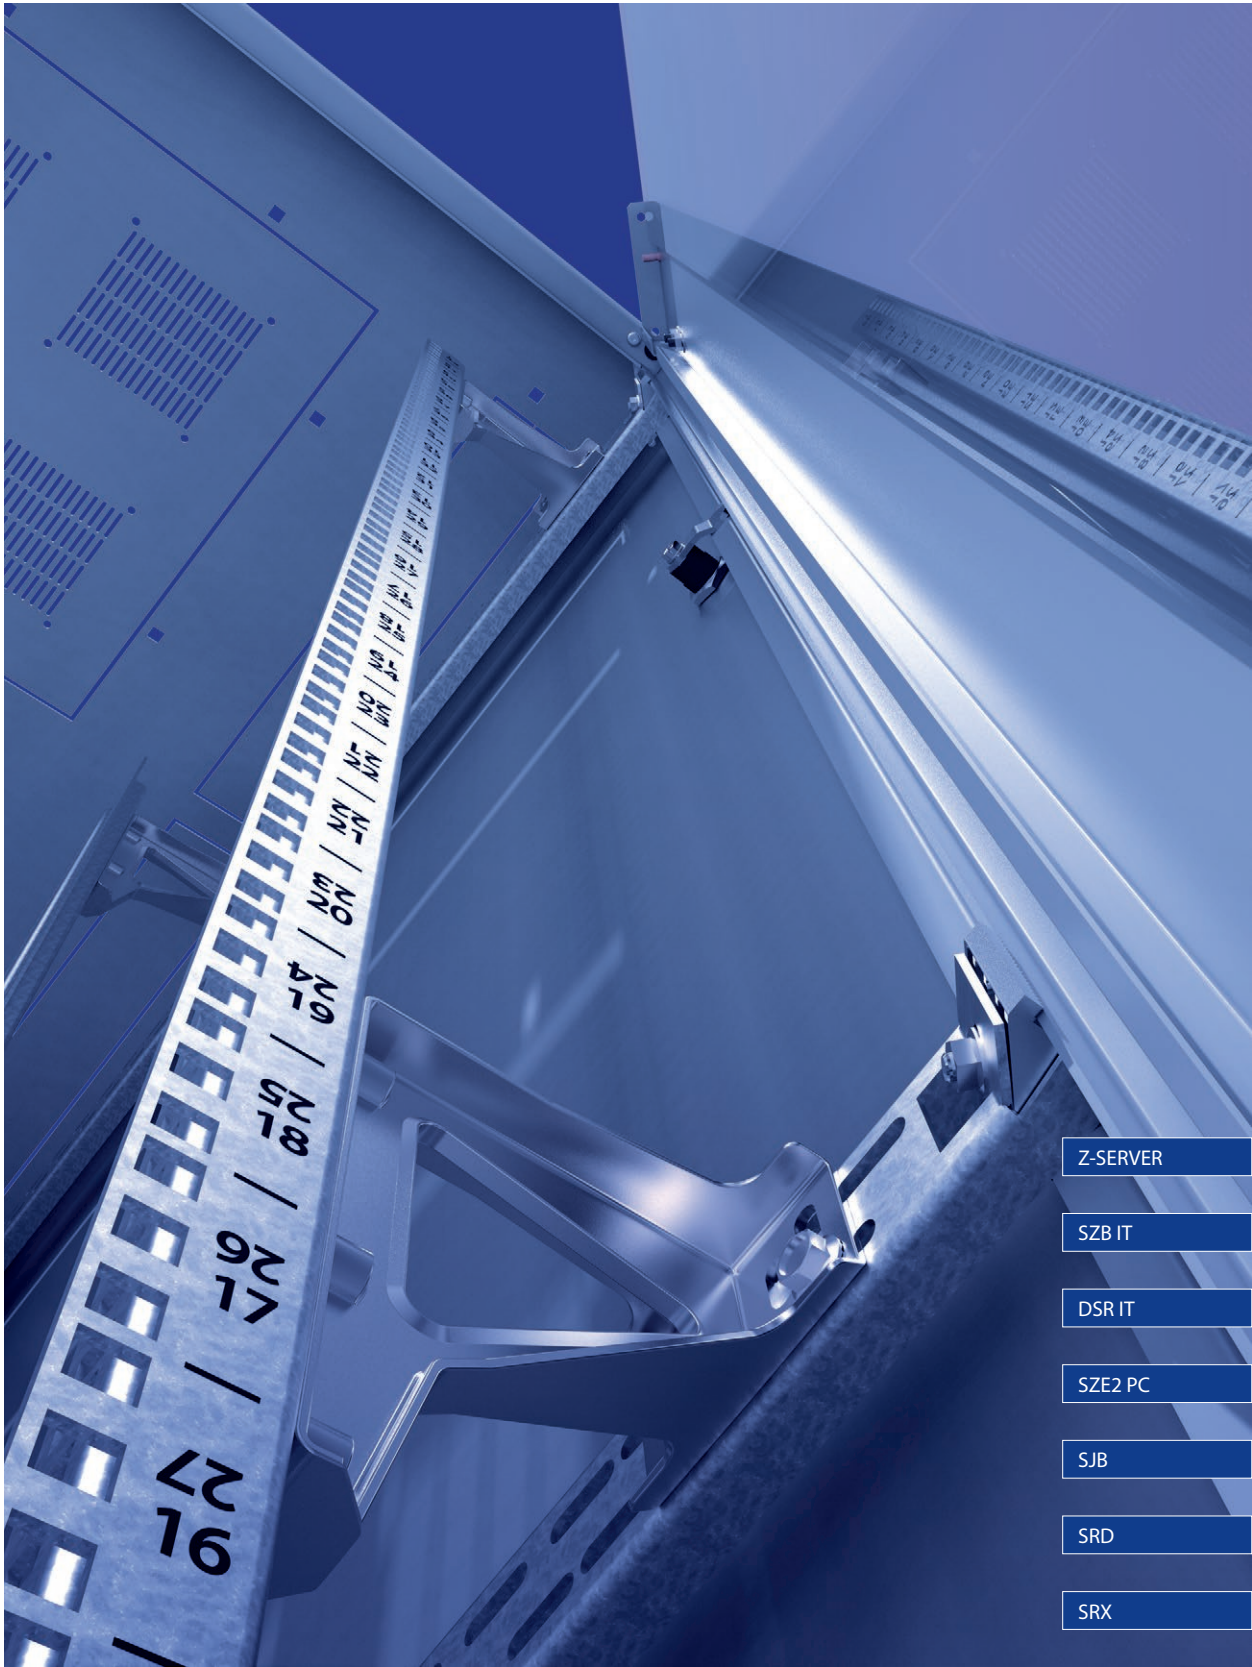

FLOOR-STANDING CABINETS AND OPEN RACKS

Z-SERVER 19"

SERVER CABINETS

DESCRIPTION

CABINETS FOR DATA CENTERS**STURDY DESIGN**

- Strong bolted frame made of steel closed profiles.
- Maximum load capacity:
1500 kg for cabinet based on levelling feet,
1750 kg for cabinet without feet,
based directly on the floor.

MULTIPURPOSE

- Smooth tool-free adjustment of 19" mounting profiles.
- Mounting profiles are U-marked to simplify installation.
- The width can be changed from 19" to 21" with no need to use additional mounting elements (in 800 mm wide cabinets).
- Door opening angle up to 270 degrees, adjustable direction of opening.
- Easy installation thanks to split side panels.
- Optional mounting of partition panels between cabinets at any time of their operation.
- Tool-free mounting of the top plate of cabinet.
- The frame includes holes for mounting accessories.

SAFETY

- Multi-point cabinet locking system:
5-point locking system in single-leaf doors;
3-point locking system in double-leaf doors (5-point locking system as an option if adapting set is used).
- Locks with access control are available.

PERFORMANCE

- Doors with optimum perforation clearance of 80%.
- Up to 86% of the door area is perforated to provide adequate cooling for the installed devices.
- To optimise the flow of cold air we provide the following components to isolate cold and hot areas at the cabinet and Z-SERVER BOX server room.

Z-SERVER SYSTEM

The new Z-SERVER cabinet system represents innovative quality solutions for data-processing centres.

Scalable functionality and easy adaptation enabled by the available additional equipment:

- **Z-SERVER BOX cold aisle installation,**
- **air flow guiding elements within a single cabinet,**
- **logical cabling arrangement elements,**
- **power supply system mounting elements.**

REFERENCE CHART

Width W [mm]	Depth D [mm]	Reference number		
600	1000	426010	456010	476010
	1200	426012	456012	476012
800	1000	428010	458010	478010
	1200	428012	458012	478012
Usable height HU [U = 44.45 mm]		42 U	45 U	47 U
Frame height H [mm]		2000	2100	2200

SCOPE OF DELIVERY

Standard cabinet configuration:

- bolted frame,
- perforated single-leaf front door,
- perforated single-leaf or double-leaf rear door,
- top plate with ventilation perforation and knock-out blanking plates,
- two pairs of 19" mounting profiles, type PREMIUM,
- earthing conductors for doors, top plate and mounting profiles,
- levelling feet.

Accessories available separately:

- side panels and other Z-SERVER accessories,
- plinth, shelves, lighting kit, 19" blanking plates.

TECHNICAL DATA**Material**

Sheet steel.


Protection degree

IP 20 in accordance with EN 60529
(does not apply to brush cable entries).

Surface finishing

Side panels, doors, top plate – powder paint, light grey (RAL 7035) or black (RAL 9005).

Mounting profiles and other metal parts – zinc-coated.

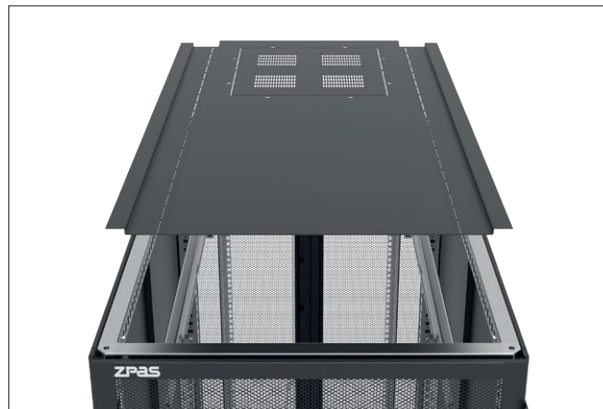

SERVER CABINETS **Z-SERVER** 19"

CONFIGURATOR



CATALOGUE NUMBER OF Z-SERVER CABINET

WZ-ZSERVER-XXXXXX-1X00-2-XXX


Reference number
specifies the cabinet's total dimensions (see reference chart).

Rear door type:
1 - perforated single-leaf door
2 - perforated double-leaf door

Cabinet's colour:
011 - RAL 7035 (light grey) 161 - RAL 9005 (black)

Z-SERVER 19" SERVER CABINETS

DESIGN

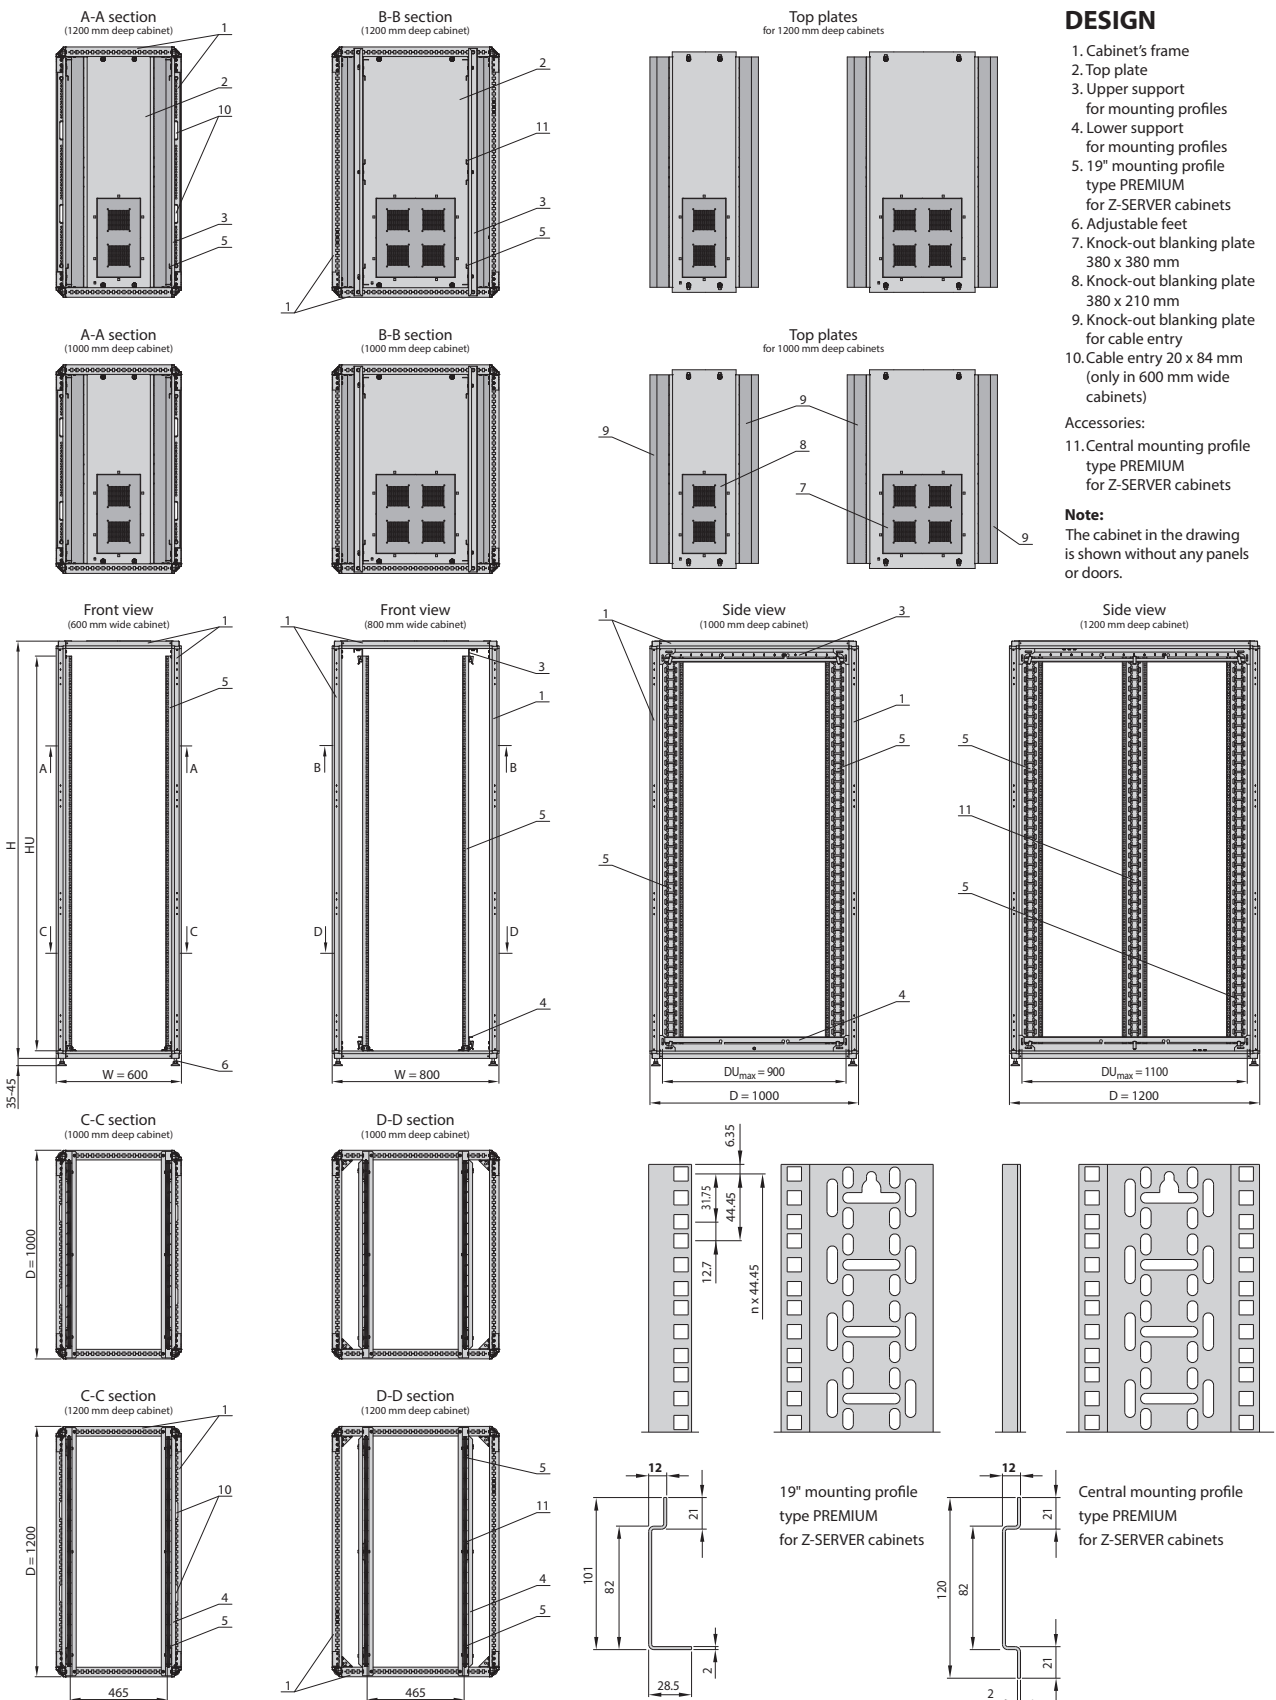

SERVER CABINETS

Z-SERVER 19"

ACCESSORIES

Split side panels

Available in two types differing in depth.

Side panels type **A (shallow)**:

- allow to open the door up to 270 degrees;
- increase the cabinet width by 3 mm on each side.

Side panels type **B (deep)**:

- provides sufficient mounting space in 600 mm wide cabinets; enables the installation of a power strip between the side panel and the 19" mounting profile;
- increase the cabinet width by 11 mm on each side.

For cabinets'		Side panels type	Catalogue number	
height	depth		RAL 7035	RAL 9005
42 U	1000	A	WZ-8477-08-01-011	WZ-8477-08-01-161
		B	WZ-8477-09-01-011	WZ-8477-09-01-161
	1200	A	WZ-8477-08-02-011	WZ-8477-08-02-161
		B	WZ-8477-09-02-011	WZ-8477-09-02-161
45 U	1000	A	WZ-8477-08-03-011	WZ-8477-08-03-161
		B	WZ-8477-09-03-011	WZ-8477-09-03-161
	1200	A	WZ-8477-08-04-011	WZ-8477-08-04-161
		B	WZ-8477-09-04-011	WZ-8477-09-04-161
47 U	1000	A	WZ-8477-08-05-011	WZ-8477-08-05-161
		B	WZ-8477-09-05-011	WZ-8477-09-05-161
	1200	A	WZ-8477-08-06-011	WZ-8477-08-06-161
		B	WZ-8477-09-06-011	WZ-8477-09-06-161

Package: 1 set (1 split side panel)

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Side panel split horizontally, consisting of upper and lower part, together with fixing accessories. The lower part is equipped with two sliding locks.



Partition panel

Designed for mounting between bayed cabinets.

It contains four 150 x 45 mm cable entries closed with knock-out blanking plates and four cut-outs for cabinet frame connectors. The front and bottom edges of the partition panel, bent at an angle of 90 degrees, facilitate its installation between the frames of adjacent cabinets. The distance between the cabinets needed to install the partition panel is only 2 mm.

The partition panel is available in two types differing in height:

- partition panel type **A for cabinets with feet**;
- partition panel type **B for cabinets without feet**.

For cabinets'		Partition panel type	Catalogue number	
height	depth		RAL 7035	RAL 9005
42 U	1000	A	WZ-8477-35-01-011	WZ-8477-35-01-161
		B	WZ-8477-35-07-011	WZ-8477-35-07-161
	1200	A	WZ-8477-35-02-011	WZ-8477-35-02-161
		B	WZ-8477-35-08-011	WZ-8477-35-08-161
45 U	1000	A	WZ-8477-35-03-011	WZ-8477-35-03-161
		B	WZ-8477-35-09-011	WZ-8477-35-09-161
	1200	A	WZ-8477-35-04-011	WZ-8477-35-04-161
		B	WZ-8477-35-10-011	WZ-8477-35-10-161
47 U	1000	A	WZ-8477-35-05-011	WZ-8477-35-05-161
		B	WZ-8477-35-11-011	WZ-8477-35-11-161
	1200	A	WZ-8477-35-06-011	WZ-8477-35-06-161
		B	WZ-8477-35-12-011	WZ-8477-35-12-161

Package: 1 pc.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Partition panel with fixing accessories.


Note: Cabinet frame connectors are ordered separately - see page 19.



Z-SERVER 19"

SERVER CABINETS

ACCESSORIES

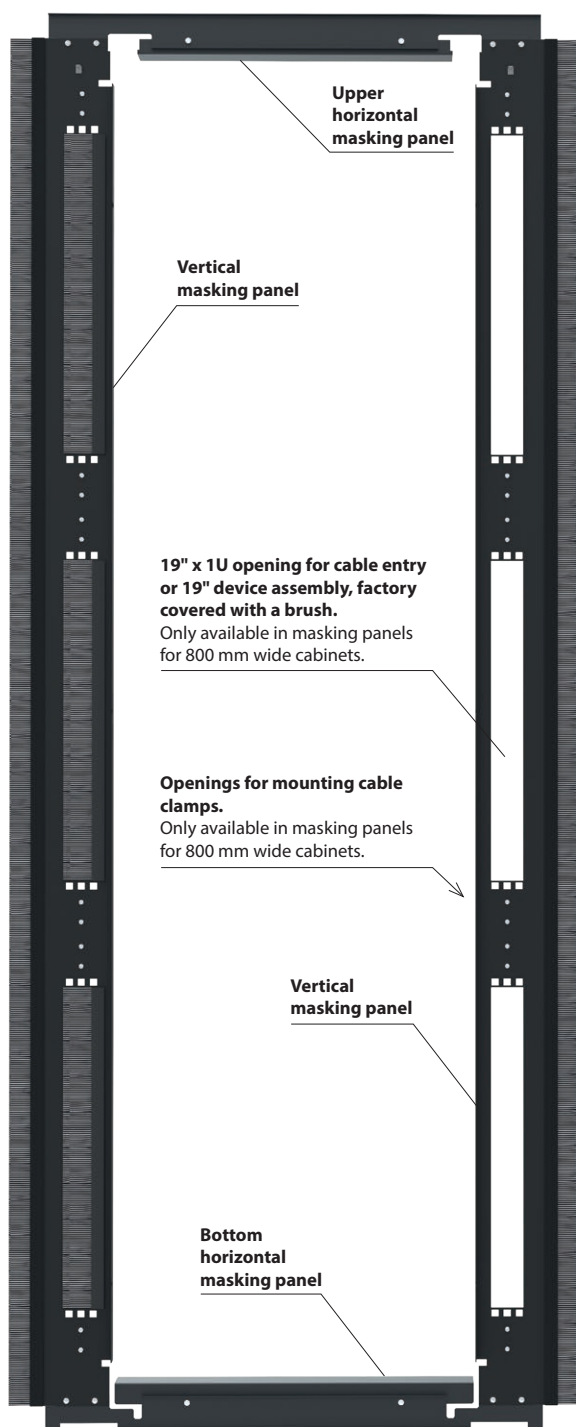

Vertical and horizontal masking panels for 800 mm wide cabinets

Vertical masking panels

For sealing the area between the 19" space and the cabinet side panel. The panels prevent the recirculation of hot air to the front area of the cabinet, and increase the efficiency of air conditioning systems.

In case of 800 mm wide cabinets the panels include openings for cable clamps mounting and 19" x 1U brush cable entries, to which, if necessary, 19" equipment can be installed instead of brush.

Vertical masking panels are mounted on 19" mounting profiles without the use of tool.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Set of two vertical masking panels with fixing accessories.

For cabinets'		Catalogue number	
height	width	RAL 7035	RAL 9005
42 U	600	WZ-8477-36-01-011	WZ-8477-36-01-161
	800	WZ-8749-E1-01-011	WZ-8749-E1-01-161
45 U	600	WZ-8477-36-02-011	WZ-8477-36-02-161
	800	WZ-8749-E1-02-011	WZ-8749-E1-02-161
47 U	600	WZ-8477-36-03-011	WZ-8477-36-03-161
	800	WZ-8749-E1-03-011	WZ-8749-E1-03-161

Package: 1 set (right and left masking panels)

Horizontal masking panels

For sealing the area between the 19" space and the top and bottom plate of the cabine. The panels prevent the recirculation of hot air to the front area of the cabinet, and increase the efficiency of air conditioning systems.

Horizontal masking panels are attached to the vertical masking panels.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Set of two horizontal masking panels with fixing accessories.

For cabinets'		Catalogue number	
height	width	RAL 7035	RAL 9005
42 U	600	WZ-8477-37-01-011	WZ-8477-37-01-161
	800	WZ-8749-E3-01-011	WZ-8749-E3-01-161
45 U	600	WZ-8477-37-02-011	WZ-8477-37-02-161
	800	WZ-8749-E3-02-011	WZ-8749-E3-02-161
47 U	600	WZ-8477-37-03-011	WZ-8477-37-03-161
	800	WZ-8749-E3-03-011	WZ-8749-E3-03-161

Package: 1 set (upper and lower masking panels)

SERVER CABINETS

Z-SERVER 19"

ACCESSORIES

Brush strip for the top plate

Brush strip for attachment to a lateral edge of the upper plate after removing the knock-out blanking plate (see drawings of the top plates on page 12).

Material


Black plastic.

Scope of delivery

Brush strip.

For cabinets' depth	Catalogue number
1000	WZ-8477-57-01-000
1200	WZ-8477-57-02-000

Package: 1 pc.

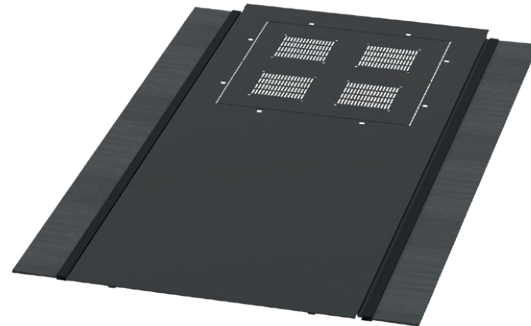

Z-SERVER cabinet top plate 800 x 1200 mm with brush strips

Bottom plate and side brush strips

Available in a few sizes suitable for width and depth of the cabinet.

Side brush strips are designed only for cabinet 800 mm wide.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005), black plastic.

Scope of delivery

Depending on chosen version: plate with brush cable entry, solid steel plate, plate with knock-out cable entry, side brush strips.

For cabinets'			Catalogue number	
type	width	depth	RAL 7035	RAL 9005
Cabinet without castors set	600	1000	WZ-8477-D7-01-011	WZ-8477-D7-01-161
	800	1000	WZ-8477-D7-02-011	WZ-8477-D7-02-161
	600	1200	WZ-8477-D7-03-011	WZ-8477-D7-03-161
	800	1200	WZ-8477-D7-04-011	WZ-8477-D7-04-161
Cabinet with castors set	600	1000	WZ-8477-D7-05-011	WZ-8477-D7-05-161
	800	1000	WZ-8477-D7-06-011	WZ-8477-D7-06-161
	600	1200	WZ-8477-D7-07-011	WZ-8477-D7-07-161
	800	1200	WZ-8477-D7-08-011	WZ-8477-D7-08-161

Package: 1 set



WZ-8477-D7-03-161



WZ-8477-D7-08-161

Z-SERVER 19"

SERVER CABINETS

ACCESSORIES



WZ-8477-73-02-161
Non-locking castors set



WZ-8477-74-02-161
Locking castors set

Castors set

Designed for Z-SERVER cabinets to increase their mobility.
Maximum load capacity: 1500 kg.

Material


Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005), holders from zinc-coated steel, plastic castors.

Scope of delivery

Castors set with fixing accessories.

For cabinets' width	Castors type	Catalogue number	
		RAL 7035	RAL 9005
600	non-locking	WZ-8477-71-03-011	WZ-8477-71-03-161
	locking	WZ-8477-71-04-011	WZ-8477-71-04-161
800	non-locking	WZ-8477-73-02-011	WZ-8477-73-02-161
	locking	WZ-8477-74-02-011	WZ-8477-74-02-161

Package: 1 pc.

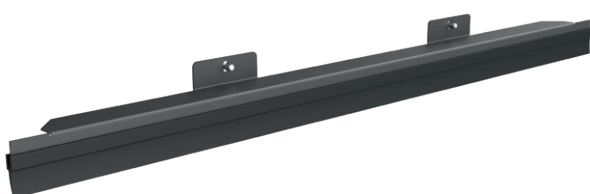**Sealing masking strip for cabinet on feet**

Sealing masking strip protects from getting cold air from the aisle to the space under the cabinet.

Material


Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005), black plastic.

Scope of delivery

Sealing masking strip with fixing accessories.

For cabinets' width	Catalogue number	
	RAL 7035	RAL 9005
600	WZ-8477-D4-01-011	WZ-8477-D4-01-161
800	WZ-8477-D4-02-011	WZ-8477-D4-02-161

Package: 1 pc.

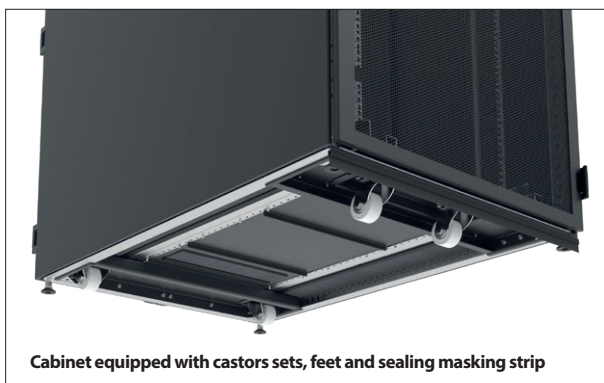

Cabinet equipped with castors sets, feet and sealing masking strip

SERVER CABINETS **Z-SERVER 19"**

ACCESSORIES

Vertical cable comb

For 600 mm and 800 mm wide cabinets. To arrange cabling in the vertical direction. Mounted on 19" mounting profile without the use of tool.

Material

Black plastic;
sheet steel powder paintet in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Vertical cable comb with fixing accessories.

For cabinets' height	Catalogue number	
	RAL 7035	RAL 9005
42 U	WZ-8477-39-01-011	WZ-8477-39-01-161
45 U	WZ-8477-39-02-011	WZ-8477-39-02-161
47 U	WZ-8477-39-03-011	WZ-8477-39-03-161

Package: 1 pc.

Vertical cable tray with cover

For 800 mm wide cabinets. For arranging high-density cabling in the vertical direction. Mounted on a 19" mounting profile without the use of tools.

Material


Black plastic;
sheet steel powder painted light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Vertical cable tray with cover and fixing accessories.

For cabinets' height	Catalogue number	
	RAL 7035	RAL 9005
42 U	WZ-8477-38-01-011	WZ-8477-38-01-161
45 U	WZ-8477-38-02-011	WZ-8477-38-02-161
47 U	WZ-8477-38-03-011	WZ-8477-38-03-161

Package: 1 pc.

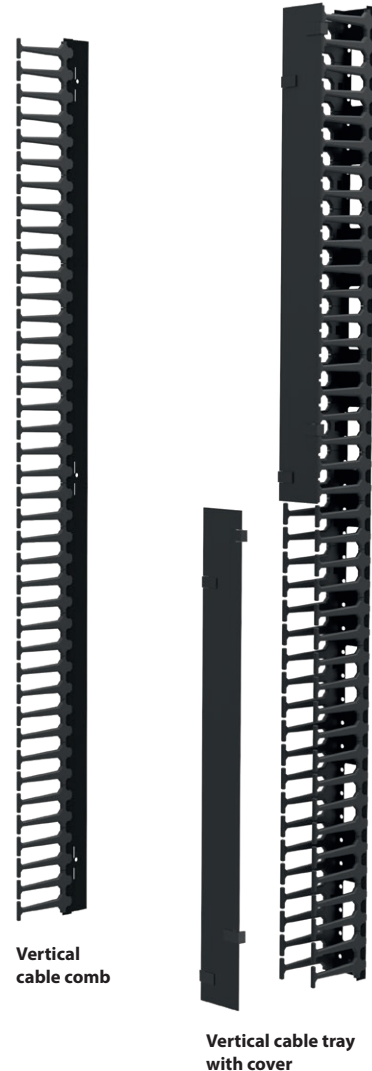

Vertical cable comb

Vertical cable tray with cover

19" cable trays

Mounted between 19" mounting profiles.
Available in 1 U and 2 U heights.

Material


Black plastic.

Scope of delivery

Cable tray without fixing accessories.

Height	Catalogue number
1 U	T-SO-900-614
2 U	T-SO-900-615
1 U double	T-SO-900-618

Package: 1 pc.

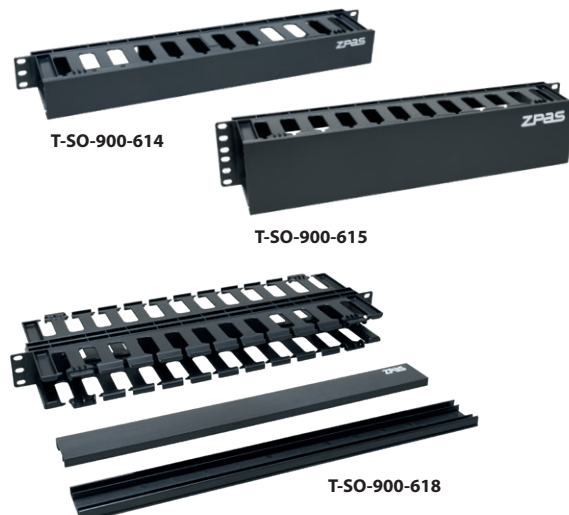

T-SO-900-614




T-SO-900-615

T-SO-900-618

Z-SERVER 19"

SERVER CABINETS

ACCESSORIES

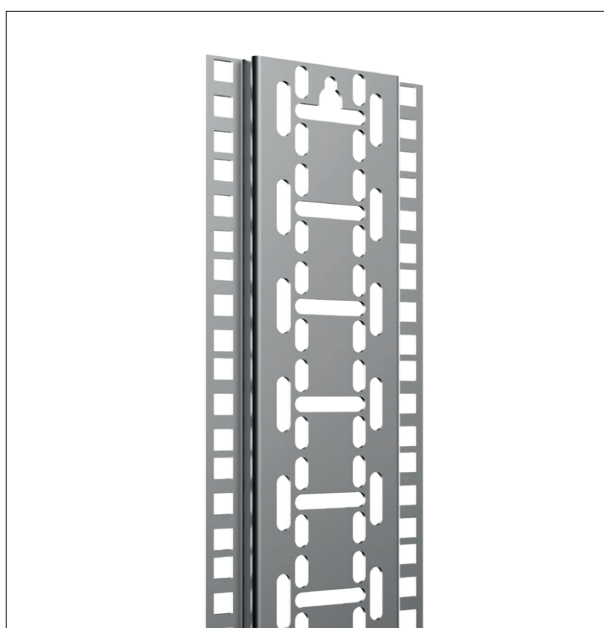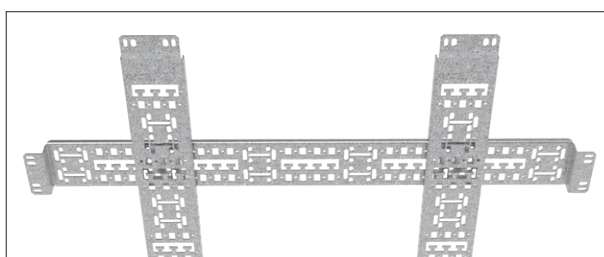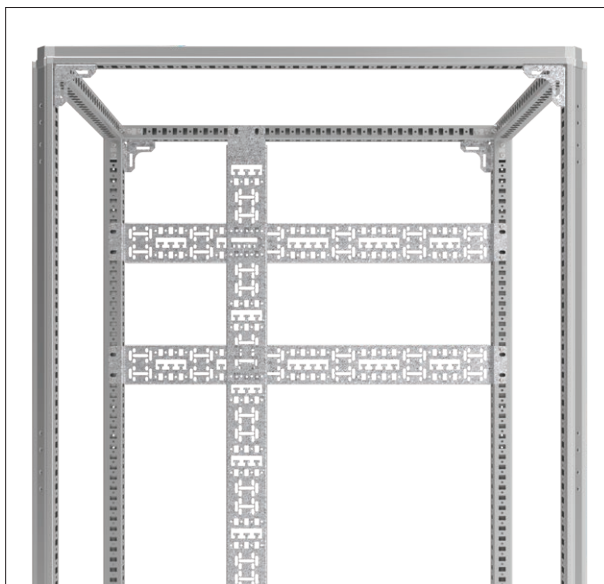**Vertical and horizontal organizers**

Intended for:

- arrangement of logical cabling,
 - arrangement of power supply cables,
 - mounting of power distribution strips and other accessories.
- The organizers are mounted on the cabinet frame.

Material

Al-Zn coated sheet steel.

Scope of delivery

Vertical or horizontal organizer with fixing accessories.

Vertical organizer

For cabinets¹		Catalogue number
width	height	
800	42 U	WZ-8477-40-01-000
	45 U	WZ-8477-40-02-000
	47 U	WZ-8477-40-03-000

Package: 1 pc.

Horizontal organizer

For cabinets¹		Catalogue number
width	depth	
600 or 800	1000	WZ-8477-41-01-000
	1200	WZ-8477-41-02-000

Package: 1 pc.

Central mounting profile type PREMIUM for Z-SERVER cabinets

Mounted to the upper and lower support of mounting profiles without the use of tool (see drawing on page 12).

Material

Al-Zn coated sheet steel.

Scope of delivery

Central mounting profile with fixing accessories.

Height	Catalogue number
42 U	WZ-8477-49-01-000
45 U	WZ-8477-49-02-000
47 U	WZ-8477-49-03-000

Package: 1 pc.

SERVER CABINETS

Z-SERVER 19"

ACCESSORIES

Adapting set for double-leaf door

Designed for changing locking system in Z-SERVER double-leaf door cabinet from 3-point to 5-point locking system.


Material

Zinc-coated steel, black plastic.


Scope of delivery

Lock cam, handle with gear, two rod-latches, plastic holders and fixing accessories.

For cabinets' height	Catalogue number
42 U	WZ-8477-91-01-000
45 U	WZ-8477-91-02-000
47 U	WZ-8477-91-03-000

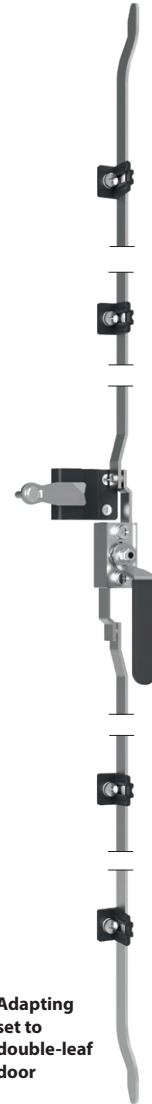

Adapting set to double-leaf door

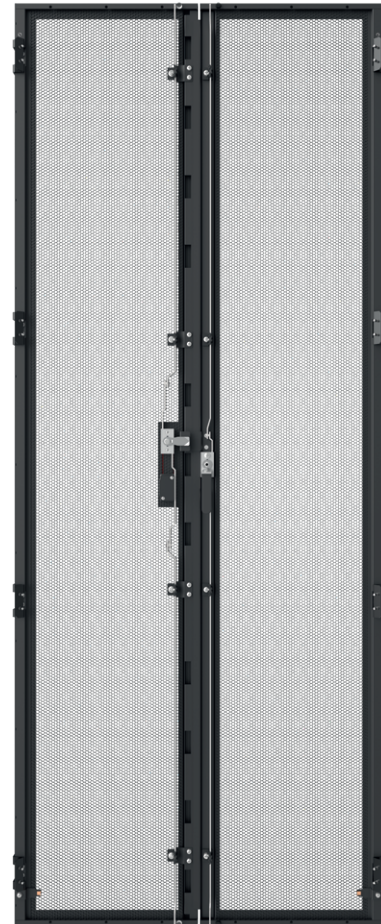

Double-leaf door with adapting set

Cabinet connection set

For baying Z-SERVER cabinets in row.
One set is intended for baying two cabinets.

Material

Al-Zn coated sheet steel.

Scope of delivery

Set: 4 external cabinet frame connectors with fixing accessories.

Package	Catalogue number
1 set	WZ-8390-24-00-000/KPL



External cabinet frame connector




Z-SERVER 19" SERVER CABINETS

COLD AISLE INSTALLATIONS

Cold aisle installation

The **Z-SERVER BOX** solution physically separates the air distributed by air conditioners and the hot air generated by operating equipment.

Z-SERVER BOX optimises the usability of the data centre infrastructure.

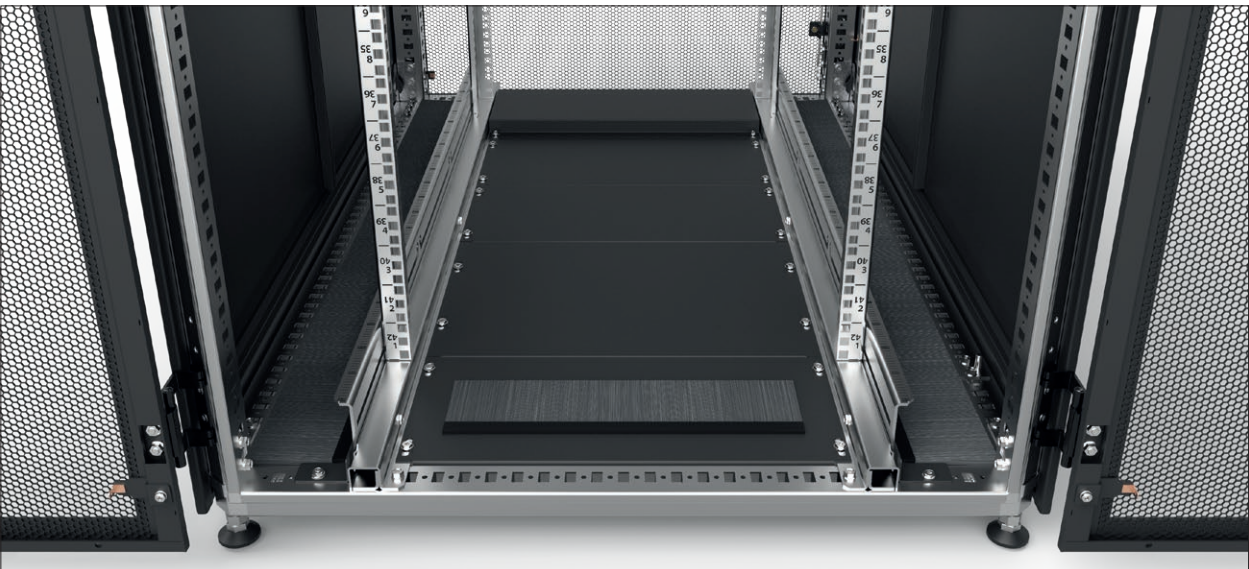

SERVER CABINETS

Z-SERVER 19"

COLD AISLE INSTALLATIONS

Cold aisle sliding door

Manual sliding glass doors without a lock. Opened along the entire width of the aisle. Supplied with a roof masking panel and cabinet side panels.

Designed for cold aisle **1200 mm** wide.

Material

Aluminium profiles; safety glass; sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Two sliding door leaves with rails, runners and self-closer, two cabinet side panels, aisle roof masking panel, fixing accessories.

Automatic doors are also available.



For Data Box cabinets¹		Catalogue number	
height	depth	RAL 7035	RAL 9005
42 U without feet	1000	WZ-8477-42-02-011	WZ-8477-42-02-161
	1200	WZ-8477-42-06-011	WZ-8477-42-06-161
45 U without feet	1000	WZ-8477-42-10-011	WZ-8477-42-10-161
	1200	WZ-8477-42-14-011	WZ-8477-42-14-161
47 U without feet	1000	WZ-8477-42-18-011	WZ-8477-42-18-161
	1200	WZ-8477-42-22-011	WZ-8477-42-22-161
42 U with feet	1000	WZ-8477-42-04-011	WZ-8477-42-04-161
	1200	WZ-8477-42-08-011	WZ-8477-42-08-161
45 U with feet	1000	WZ-8477-42-12-011	WZ-8477-42-12-161
	1200	WZ-8477-42-16-011	WZ-8477-42-16-161
47 U with feet	1000	WZ-8477-42-20-011	WZ-8477-42-20-161
	1200	WZ-8477-42-24-011	WZ-8477-42-24-161

Package: 1 set.

Cold aisle raised roof


Roof module with internal height 150 mm, designed for cold aisle 1200 mm wide. The top transparent element of the module is tilt-mounted and can be installed without the use of tool. Modular design simplifies expansion.

Material

Transparent plastic (polycarbonate); sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Roof module with fixing accessories.

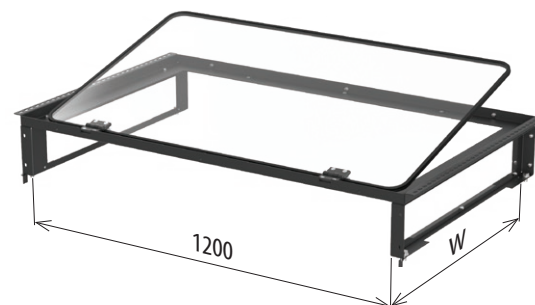


Module width W [mm]	Catalogue number	
	RAL 7035	RAL 9005
300	WZ-8744-C4-01-011	WZ-8744-C4-01-161
600	WZ-8477-C4-02-011	WZ-8477-C4-02-161
800	WZ-8477-C4-03-011	WZ-8477-C4-03-161

Package: 1 pc.

Z-SERVER 19" SERVER CABINETS

COLD AISLE INSTALLATIONS

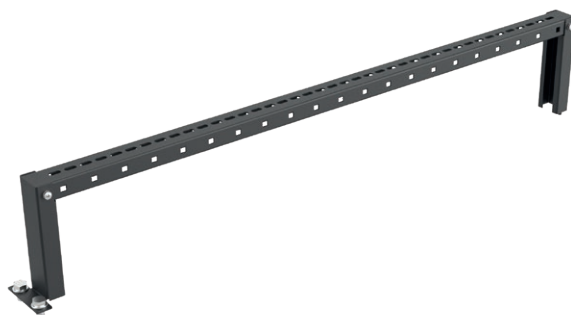

Cable tray bracket

Designed for cables organization on Z-SERVER cabinets roofs. It is mounted by depth on two cabinets baying in row. From one side it is bolted to back corners of the cabinet, from another it is set on frame.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Cable tray bracket with fixing accessories.

For cabinets' depth	Catalogue number	
	RAL 7035	RAL 9005
1000	WZ-8749-45-01-011	WZ-8749-45-01-161
1200	WZ-8749-45-02-011	WZ-8749-45-02-161

Package: 1 pc.



Side cable tray bracket

Designed for cables organization on Z-SERVER cabinets roofs. It is mounted on side cabinet. From one side it is bolted to cable tray bracket, from another it is set on frame.

Material


Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Cable tray bracket with fixing accessories.

For cabinets' width	Catalogue number	
	RAL 7035	RAL 9005
600	WZ-8477-D6-01-011	WZ-8477-D6-01-161
800	WZ-8477-D6-02-011	WZ-8477-D6-02-161

Package: 1 pc.

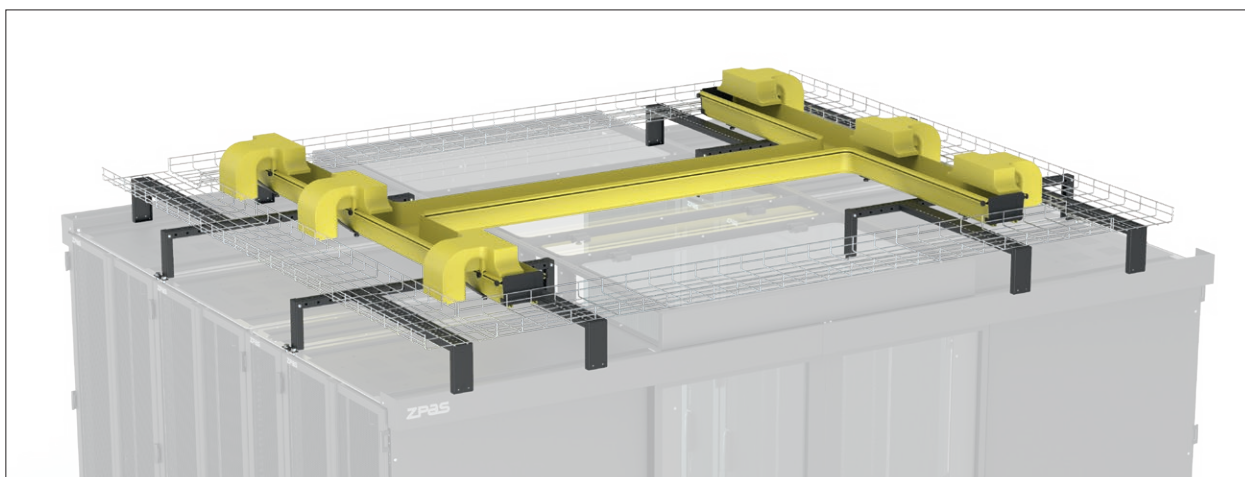

SERVER CABINETS

Z-SERVER 19"

COLD AISLE INSTALLATIONS

Aisle lightening


Light fitting is for assembling under the aisle roof.
Dimensions: 26,2 x 24,5 mm. The length shall be chosen by 200 mm less than the width of the aisle.

Material

Aluminium body silver or black, frosted plexiglass.

Scope of delivery

Electric light fitting with 12 V LEDs, power supply cable without plug, fixing accessories.
Power supply and control components are ordered separately.

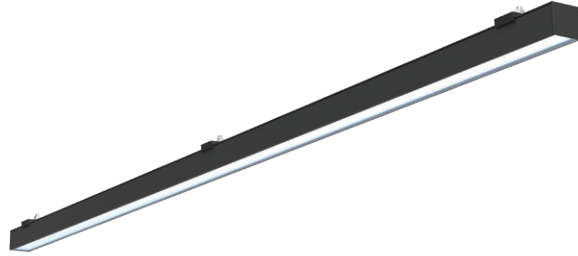

Product name	Catalogue number	
	Silver	Black
Light fittings		
Light fitting, 1000 mm long	WN-8477-Z1-02-011	WN-8477-Z1-02-161
Power supply components	RAL 7035	RAL 9005
Main PS-3U 19" panel with powering elements for light fittings	WN-8477-Z1-04-011	WN-8477-Z1-04-161
Additional PS-3U 19" panel with powering elements for light fittings	WN-8477-Z1-05-011	WN-8477-Z1-05-161
Bracket for assembling PS-3U 19" panel on Z-SERVER cabinet roof	WZ-8848-A5-01-011	WZ-8848-A5-01-161
Control components	White	Black
Microwave motion detector	WN-8477-Z1-06-011	WN-8477-Z1-06-161
Touch light switch (one button)	---	WN-8477-Z1-07-000

Package: 1 pc.

Power strip brackets

Intended for vertical mounting power strips onto mounting profiles type PREMIUM.

Tool-free mounting.

Material

Zinc-coated sheet steel powder painted
in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Bottom and top bracket with fixing accessories.

Product name	Catalogue number	
	RAL 7035	RAL 9005
Set of brackets for mounting two power strips	WZ-8626-83-00-011-KPL	WZ-8626-83-00-161-KPL
Set of brackets for mounting one power strip	WZ-8626-83-01-011-KPL	WZ-8626-83-01-161-KPL

Package: 1 set



WZ-8626-83-00-161-KPL

WZ-8626-83-01-161-KPL

SZB IT 19" NETWORK/SERVER CABINETS

DESCRIPTION

STANDARD CABINETS WITH FRONT GLASS DOOR WITH METAL SIDES

available in constant supply from warehouse

SCOPE OF DELIVERY

- Bolted frame (bottom plate, top plate, four posts).
- Front glass door with metal sides and lock with swing handle; cabinets 45 or 42 U high have a three-point lock, cabinets 24 U high have a single-point lock.
- Rear solid metal, shortened door with single-point locks without handle; 3U cable entry panel with a brush strip, mounted under the shortened door.
- Two solid metal side panels with single-point locks.
- Two pairs of 19" mounting profiles, type STANDARD, stepless adjustable.
- Earthing bar and earthing conductors for doors and side panels.
- Four levelling feet.

TECHNICAL DATA

Material

Frame, side panels, solid metal door, mounting profiles, C-profiles - sheet steel.

Door with glass - sheet steel, clear mineral safety glass
Outriggers - zamak casting.

Protection degree

IP 20 in accordance with EN 60529
(does not apply to brush cable entries).

Surface finishing

Frame, doors, side panels
- powder paint, light grey (RAL 7035).
Mounting profiles, C-profiles
- Al-Zn coated.

Maximum load capacity

See page 30

REFERENCE CHART

Height [U]	Width [mm]	Depth [mm]	RAL colour	Catalogue number
24 U	600	600	7035	WZ-IT-246060-69AA-2-011
		800	7035	WZ-IT-246080-69AA-2-011
	800	600	7035	WZ-IT-248060-69AA-2-011
		800	7035	WZ-IT-248080-69AA-2-011
42 U	600	600	7035	WZ-IT-426060-69AA-2-011
		800	7035	WZ-IT-426080-69AA-2-011
	800	600	7035	WZ-IT-428060-69AA-2-011
		800	7035	WZ-IT-428080-69AA-2-011
45 U	600	600	7035	WZ-IT-456060-69AA-2-011
	800	800	7035	WZ-IT-458080-69AA-2-011


Other available configurations are presented on pages 30-31

ADVANTAGES


- Cable openings in the top and bottom plates, 71 mm wide, what allows to put thought the power cords with three-phase plug.
- All openings in the top and bottom plates blanked with knock-out blanking plates.
- U-marking on the mounting profiles.
- Maximum opening angle for front door – 270°
- Possibility to change door opening's direction.
- Possibility to put the cabinet directly on the floor (no protruding elements under the cabinet).
- Adaptation for bying the cabinets in the rows.

ACCESSORIES from page 59

- **Roof** page 74
- **Plinth, castors** page 60
- **Fan units** page 88
- **Blanking and cable entry plates** page 75
- **Power strips** page 96
- **Shelves** page 64
- **Mounting guides** page 71
- **Cable trays** page 83
- **Masking panels** page 77

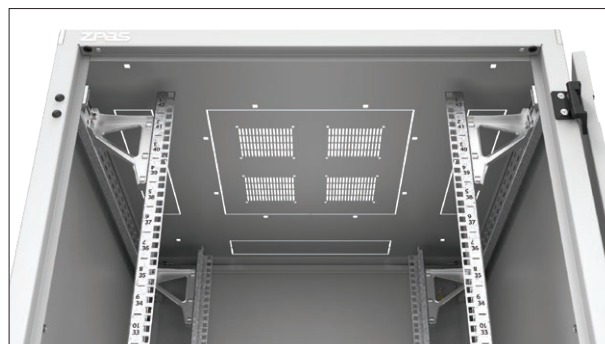

View on the top plate

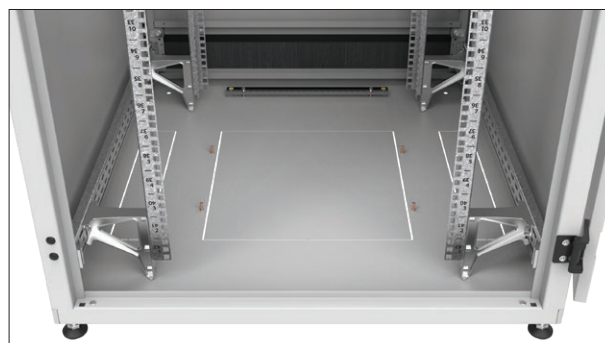

View on the bottom plate. Under the rear door is mounted 3U cable entry panel with a brush strip.

NETWORK/SERVER CABINETS **SZB IT 19"**

DESCRIPTION



Hinges enabling opening door by 270°

Holes for buying cabinets in a row



Three-point rod-latch lock with a swing handle

Additional holes for hinges, allowing to change the door opening direction

Cabinet 600 mm wide



Cabinet 800 mm wide

U-marking on the mounting profiles



See the video:
zpas.pl/qr/f10

SZB IT 19" NETWORK/SERVER CABINETS

DESCRIPTION

STANDARD CABINETS WITH PERFORATED DOOR available in constant supply from warehouse

SCOPE OF DELIVERY

- Bolted frame (bottom plate, top plate, four posts).
- Front and rear perforated metal door (clearance 80%, proportion of the perforated area in total door area up to 86%) with three-point lock with swing handle.
- Two solid metal side panels with single-point locks.
- Two pairs of 19" mounting profiles, type STANDARD, stepless adjustable.
- Earthing bar.
- Earthing conductors for doors and side panels.
- Four levelling feet.

TECHNICAL DATA

Material

Frame, side panels, doors, mounting profiles,
C-profiles - sheet steel.
Outriggers - zamak casting.

Protection degree

IP 20 in accordance with EN 60529
(does not apply to brush cable entries).

Surface finishing

Frame, doors, side panels
- powder paint, light grey (RAL 7035) or black (RAL 9005).
Mounting profiles, C-profiles
- Al-Zn coated.

Maximum load capacity

See page 30

ACCESSORIES from page 59

- **Roof** page 74
- **Plinth, castors** page 60
- **Fan units** page 88
- **Blanking and cable entry plates** page 75
- **Power strips** page 96
- **Shelves** page 64
- **Mounting guides** page 71
- **Cable trays** page 83
- **Masking panels** page 77


REFERENCE CHART

Height [U]	Width [mm]	Depth [mm]	RAL colour	Catalogue number
42 U	600	1000	7035	WZ-IT-426010-44AA-2-011
			9005	WZ-IT-426010-44AA-2-161
	800	1000	7035	WZ-IT-428010-44AA-2-011
			9005	WZ-IT-428010-44AA-2-161

Other available configurations are presented on pages 30-31

ADVANTAGES

- Cable openings in the top and bottom plates, 71 mm wide, what allows to put through the power cord with three-phase plug.
- All openings in the top and bottom plates blanked with knock-out blanking plates.
- U-marking on the mounting profiles.
- Maximum opening angle for front and rear door – 270°
- Possibility to change door opening's direction.
- Possibility to put the cabinet directly on the floor (no protruding elements under the cabinet).
- Adaptation for bying the cabinets in the rows and Data Box creation (cold/hot aisle).

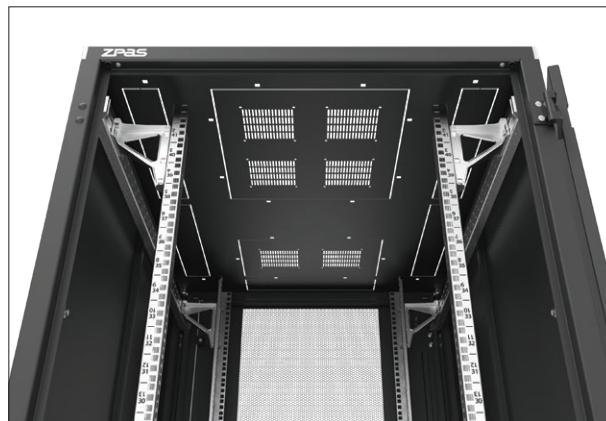

View on the top plate




View on the bottom plate

NETWORK/SERVER CABINETS **SZB IT 19"**

DESCRIPTION



Hinges enabling opening door by 270°

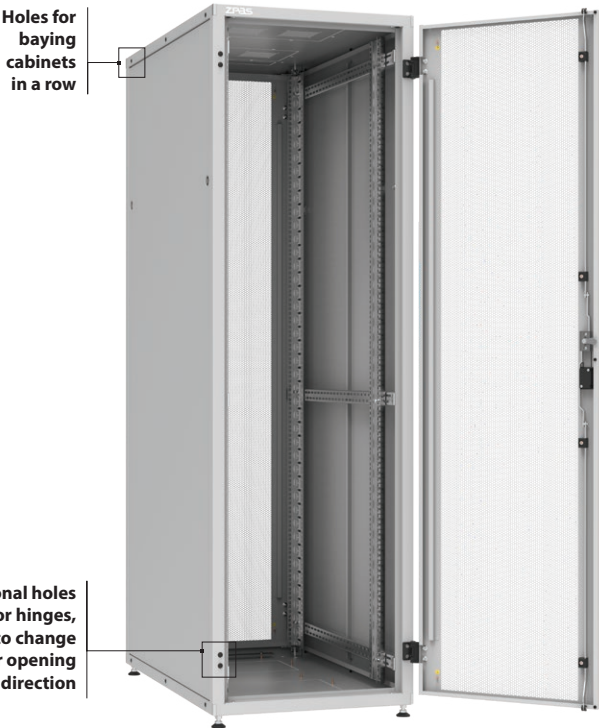


Additional holes for hinges, allowing to change the door opening direction

Cabinet 600 mm wide



Cabinet 800 mm wide

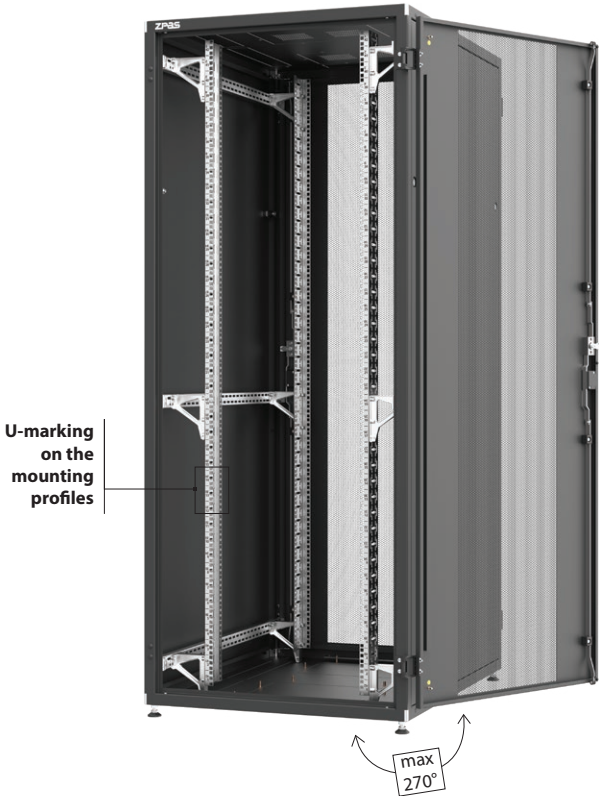


U-marking on the mounting profiles

Three-point rod-latch lock with a swing handle

max 270°

SZB IT 19" NETWORK/SERVER CABINETS

DESIGN

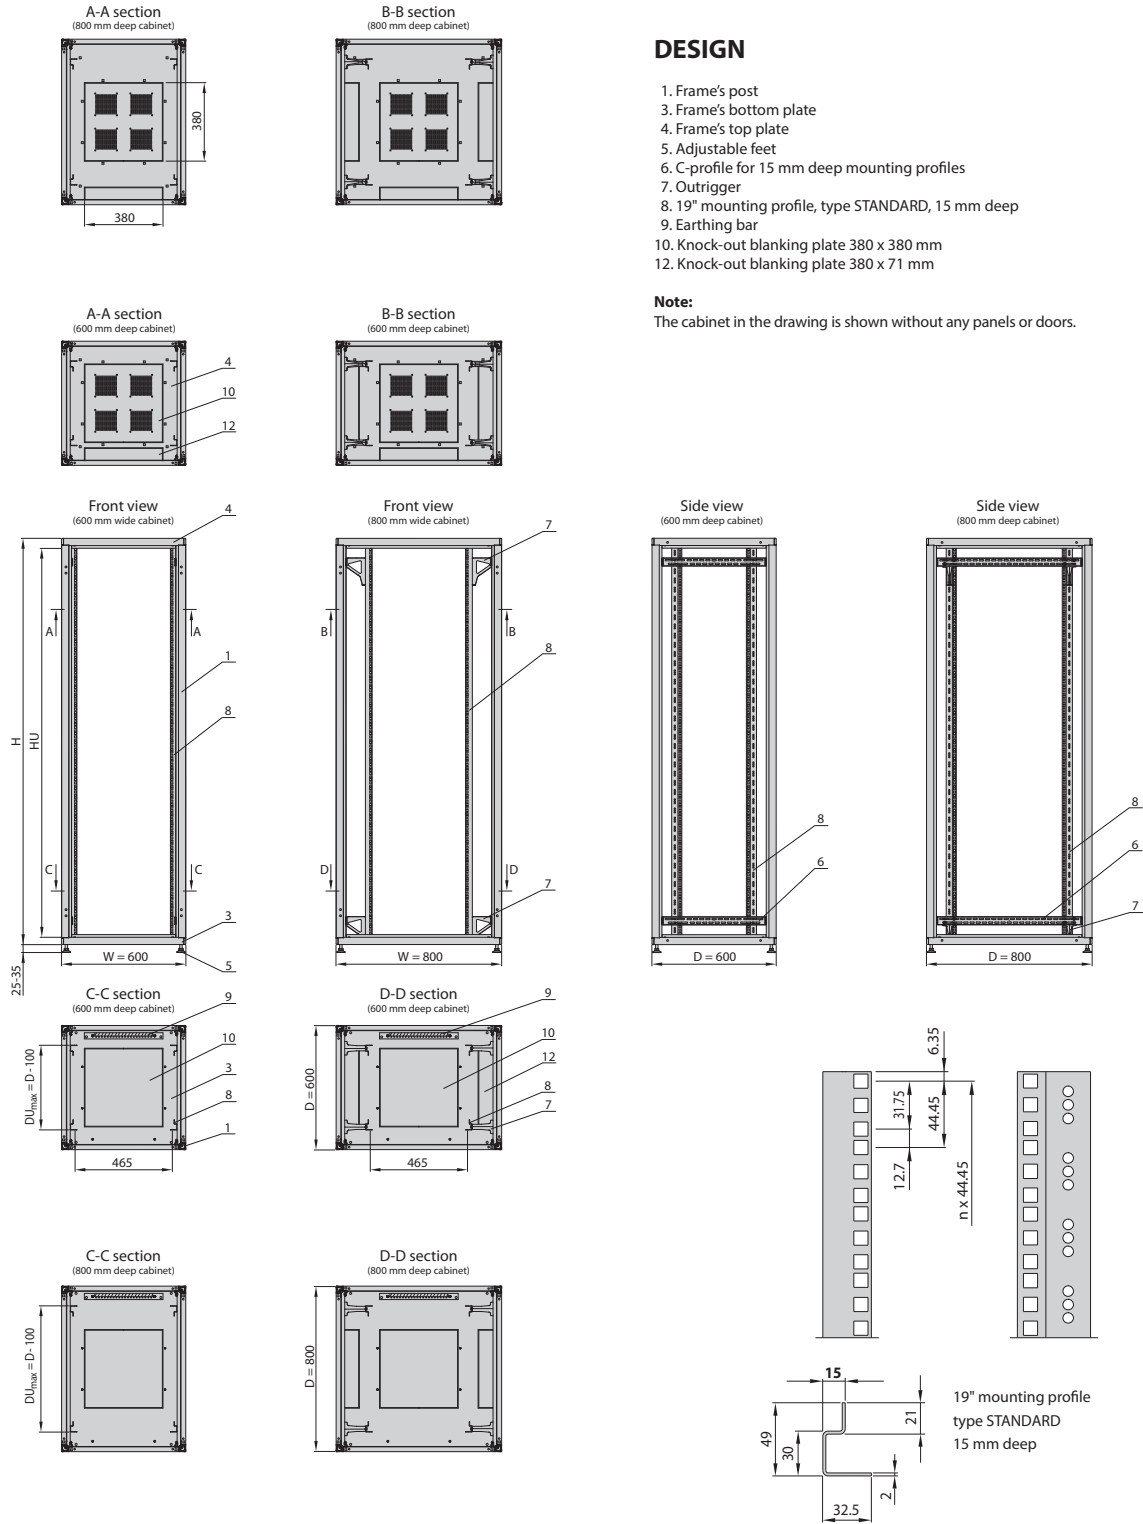

NETWORK/SERVER CABINETS

SZB IT 19"

DESIGN


DESIGN

1. Frame's post
2. Frame's middle post
3. Frame's bottom plate
4. Frame's top plate
5. Adjustable feet
6. C-profile for 12 mm deep mounting profiles
7. Outrigger
8. 19" mounting profile, type PREMIUM*, 12 mm deep
9. Earthing bar
10. Knock-out blanking plate 380 x 380 mm
11. Knock-out blanking plate 380 x 210 mm
12. Knock-out blanking plate 380 x 71 mm

Note:

The cabinet in the drawing is shown without any panels or doors.

*) Cabinets in standard configuration (see pages 26-27) are equipped with STANDARD type of mounting profiles.

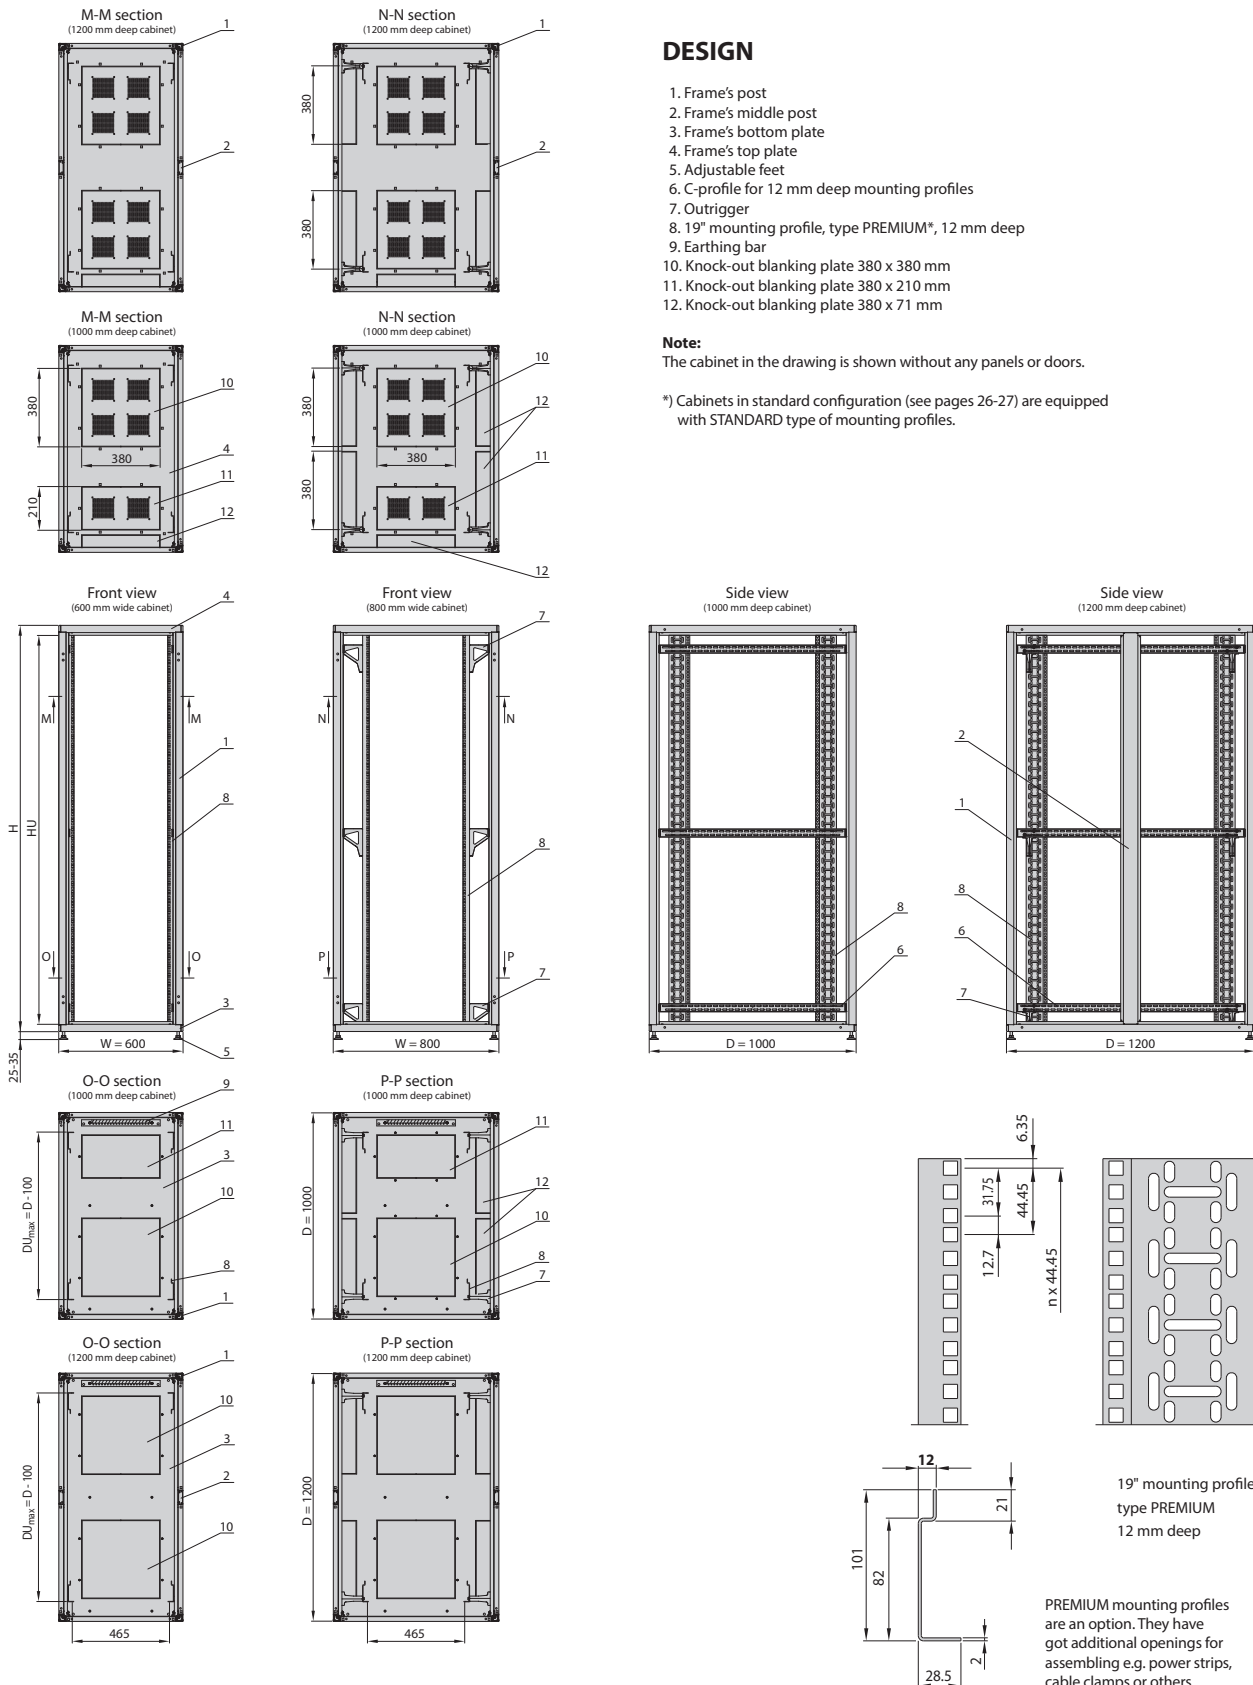

SZB IT 19" NETWORK/SERVER CABINETS

CONFIGURATOR

REFERENCE CHART

Width W [mm]	Depth D [mm]	Reference number					
600	600	186060	246060	336060	426060	456060	—
	800	186080	246080	336080	426080	456080	—
	1000	—	246010	—	426010	456010	476010
	1200	—	—	—	426012	456012	476012
800	600	188060	248060	338060	428060	458060	—
	800	188080	248080	338080	428080	458080	—
	1000	—	248010	—	428010	458010	478010
	1200	—	—	—	428012	458012	478012
Usable height HU [U = 44.45 mm]		18 U	24 U	33 U	42 U	45 U	47 U
Frame height H [mm]		896	1163	1563	1963	2096	2186

Note: Cabinets available in constant supply from warehouse are listed and described on pages 24-27.

CATALOGUE NUMBER OF SZB IT CABINET

WZ-IT-XXXXXX-XXXX-X-XXX

Reference number
specifies the cabinet's overall dimensions (see reference chart).

F - FRONT | R - REAR

Door or panel types:


- 0 - without door or without panel
- 1 - glass door with single-point lock without handle
- 2 - single-leaf solid metal door with lock with swing handle
- 3 - double-leaf solid metal door with lock with swing handle
- 4 - single-leaf perforated door (80% clearance) with lock with swing handle
- 5 - double-leaf perforated door (80% clearance) with lock with swing handle
- 6 - glass door with metal sides and lock with swing handle
- 7 - double-leaf metal door with glass and lock with swing handle
- 8 - metal door with glass and lock with swing handle
- 9 - solid metal, shortened door with single-point locks without handle and 3U cable entry panel with a brush strip, mounted under the shortened door
- A - solid metal panel with single-point locks
- B - perforated metal panel (80% clearance) with single-point locks

Maximum door opening angle: 1, 2, 3, 4, 5, 6, 8 – 270° 9 – 110°

Type of lock with handle:

Cabinets height: 33-47 U
- three-point rod-latch lock

Cabinets height: 18-24 U
- single-point lock



Cabinet's colour:
011 - RAL 7035 161 - RAL 9005

Layout of mounting profiles or mounting angles inside the cabinet:

- 1 - two pairs of 19" mounting profiles type STANDARD and one pair of middle mounting profiles type STANDARD 15 mm deep
- 2 - two pairs of 19" mounting profiles type STANDARD
- 3 - two pairs of 19" mounting angles
- 4 - two pairs of 19" mounting profiles type PREMIUM
- 5 - two pairs of 19" mounting profiles type PREMIUM and one pair of middle mounting profiles type STANDARD 12 mm deep

LS - LEFT SIDE | RS - RIGHT SIDE

Side panel types:

- 0 - without any panel
- A - solid metal panel with single-point locks
- B - perforated metal panel (80% clearance) with single-point locks
- D - solid metal partition panel

Note:

The delivery of each SZB IT cabinet (except for elements listed in cat. no.) includes the following: four levelling feet, earthing bar and earthing conductors for door and side panels. Other equipment (roof, plinth, castors, blanking and cable entry plates, shelves etc.) are ordered separately - see pages 59-110).

Maximum load capacity for SZB IT cabinets

The maximum weight of equipment mounted in SZB IT cabinets is:

- 1000 kg* - for cabinets' depth 600 or 800 mm for all heights based on levelling feet, plinth or directly on the floor
- for cabinets' depth 1000 mm and height 24U based on levelling feet, plinth or directly on the floor
- 1500 kg* - for cabinets' depth 1000 or 1200 mm based on levelling feet, plinth or directly on the floor (except height 24U)
- 150 kg - for cabinet with castors type 150
- 500 kg - for cabinet with castors type 300

*) Declared carrying capacity is valid if maintaining the maximum distance between mounting profiles on the depth and even loading.

NETWORK/SERVER CABINETS

SZB IT 19"

CONFIGURATOR

AVAILABLE DOOR TYPES AND PANELS



[1] Glass door



[2] Single-leaf
solid metal door



[3] Double-leaf
solid metal door



[4] Single-leaf
perforated door
(80% clearance)



[5] Double-leaf
perforated door
(80% clearance)



[6] Glass door
with metal sides



[7] Double-leaf
metal door
with glass



[8] Metal door
with glass



[9] Solid metal,
shortened door
+ 3U cable entry
panel with
a brush strip



[A] Solid metal
panel




[B] Perforated
metal panel
(80% clearance)



[D] Solid metal
partition panel

DSR IT 19" COLLOCATION SERVER CABINETS

DESCRIPTION

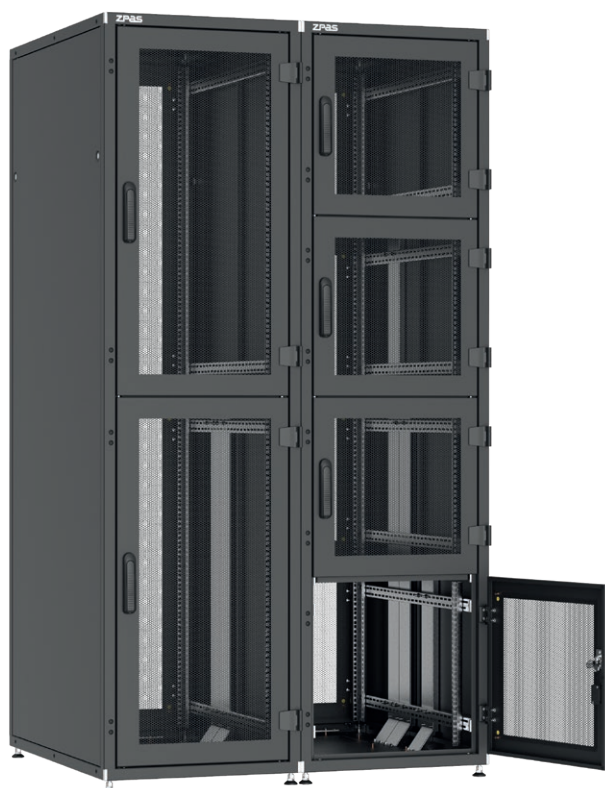

DSR IT cabinets 47 U, 600 x 1000 mm



DSR IT 47 U, 800 x 1200 mm

CHARACTERISTIC

- The interior of the cabinet is divided by horizontal partitions for two or four compartments. Each compartment is equipped with: an independent 19" rack, cable trays routed on both sides of the cabinet, a door.
- A different key code for each compartment of the cabinet.
- Cable entry from the bottom or from the top.
- Cable openings in the top and bottom plates with knock-out blanking plates.
- U-marking on the mounting profiles.
- Maximum opening angle for front and rear door – 270°.
- Possibility to change door opening's direction.
- Possibility to put the cabinet directly on the floor (no protruding elements under the cabinet).
- Adaptation for baying the cabinets in row and Data Box creation (cold/hot aisle).

SCOPE OF DELIVERY

- Bolted frame (bottom plate, top plate, four posts).
- One or three horizontal partitions (depending on the cabinet's configuration).
- Perforated metal front and rear doors (80% perforation clearance) for each compartment of the cabinet.
- Side panels or partitions (depending on the cabinet's configuration).
- Two pairs of 19" mounting profiles type STANDARD for each compartment of the cabinet.
- Cable channels (depending on the cabinet's configuration).
- Earthing bar.
- Earthing conductors for doors and side panels.
- Four levelling feet.

TECHNICAL DATA

Material

Frame, side panels, partitions, doors, mounting profiles, C-profiles, cable trays

- sheet steel.

Outriggers (in 800 mm wide cabinets)

- zamak casting.

Protection degree

IP 20 in accordance with EN 60529.

Surface finishing

Frame, side panels, doors, partitions - powder paint, light grey (RAL 7035) or black (RAL 9005).

Mounting profiles, C-profiles, cable trays - Al-Zn coated.

Maximum load capacity

1500 kg

WYPOSAŻENIE DODATKOWE od str. 59

- **Plinth** page 60
- **Blanking and cable entry plates** page 75
- **Power strips** page 96
- **Shelves** page 64
- **Mounting guides** page 71


COLLOCATION SERVER CABINETS

DSR IT 19"

DESCRIPTION




DSR IT
47 U, 800 x 1000 mm,
2 compartments 23 U,
cable trays
routed from below

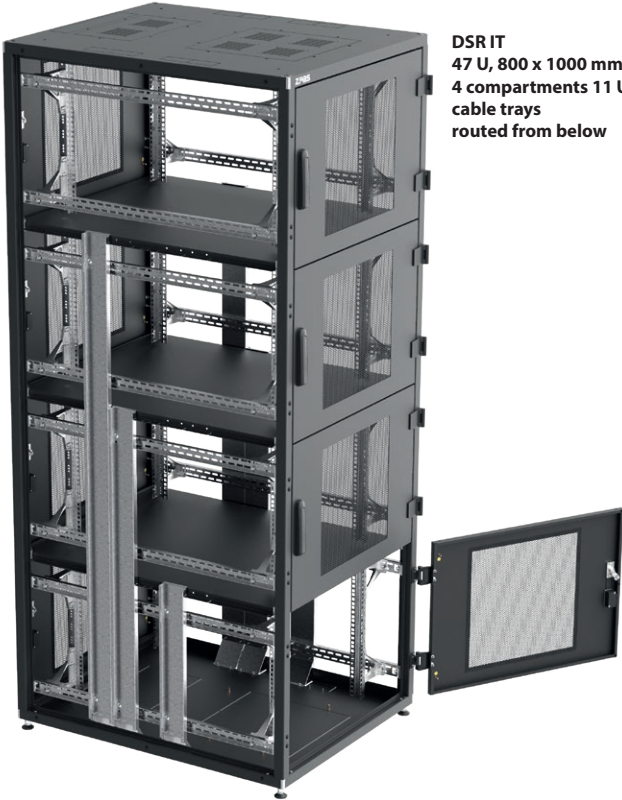


DSR IT
47 U, 800 x 1000 mm,
4 compartments 11 U,
cable trays
routed from below



DSR IT 600 x 1200 mm, top plate

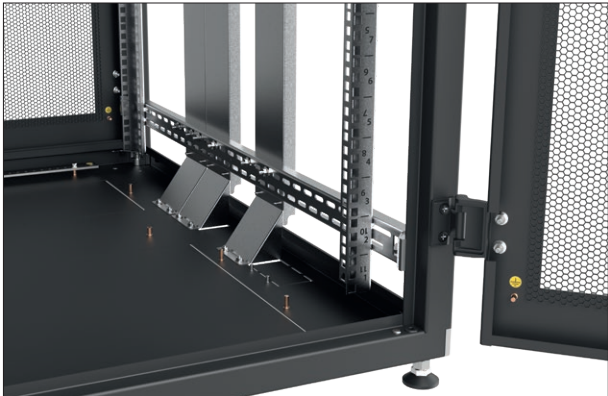

DSR IT 600 x 1200 mm, bottom plate

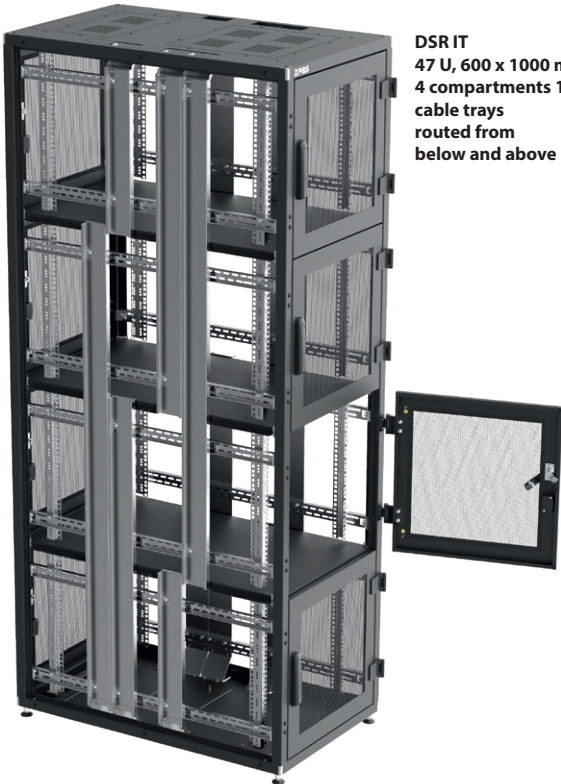

DSR IT
47 U, 600 x 1000 mm,
4 compartments 11 U,
cable trays
routed from
below and above


DESIGN



1. Frame's post
2. Frame's middle post
3. Frame's bottom plate
4. Frame's top plate
5. Adjustable feet
6. C-profile for 15 mm deep mounting profiles
7. Outrigger
8. 19" mounting profile, type STANDARD, 15 mm deep
9. Earthing bar
10. Knock-out blanking plate 380 x 380 mm
11. Knock-out blanking plate 380 x 210 mm
12. Knock-out blanking plate 380 x 71 mm
13. Knock-out blanking plate 87 x 44 mm
14. Partition
15. Cable tray 90 x 20.5 mm
16. Cable cover

Note:

The cabinets in the drawing are shown without any panels or doors.

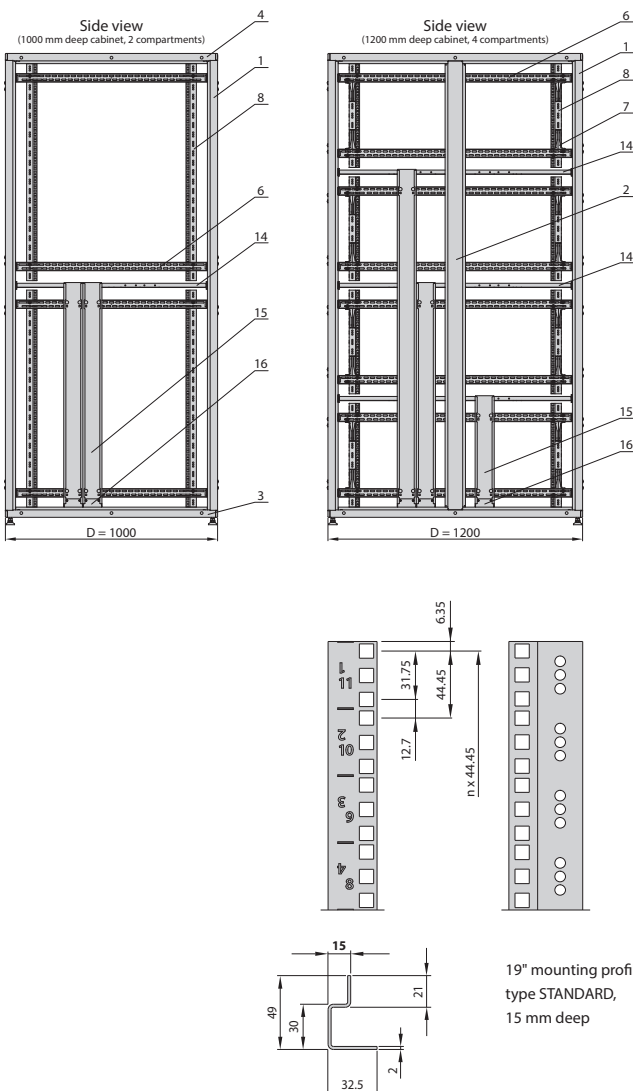

COLLOCATION SERVER CABINETS

DSR IT 19"

CONFIGURATOR

REFERENCE CHART

Width W [mm]	Depth D [mm]	Reference number	
600	1000	426010	476010
	1200	426012	476012
800	1000	428010	478010
	1200	428012	478012
Total frame height H [mm]		1963	2186
Usable frame height HU [U = 44.45 mm]		42 U	47 U
Usable compartments height	2 compartments: 2 x HU2	2 x 20 U	2 x 23 U
	4 compartments: 4 x HU4	4 x 10 U	4 x 11 U

CATALOGUE NUMBER OF DSR IT CABINET

WZ-DSRIT-XXXXXX-44XX-XX-XXX

Reference number

specifies the cabinet's total dimensions (see reference chart).

F - FRONT

R - REAR

Door type:

4 - single-leaf perforated metal door (80% perforation clearance), lock with swing handle

LS - LEFT SIDE

RS - RIGHT SIDE

Side panel types:

0 - without any panel
 A - solid metal side panel with single-point locks
 D - solid metal partition with single-point locks

The number of compartments:

2 - two compartments
 4 - four compartments

Cable trays orientation:

1 - cable trays routed from below
 2 - cable trays routed from above
 3 - cable trays routed from below and above

Cabinet's colour:

011 - RAL 7035 (light grey)
 161 - RAL 9005 (black)


SZB/DSR IT 19" SERVER CABINETS

COLD AISLE INSTALLATIONS

Cold aisle installation

The **SZB IT Data Box** solution physically separates the air distributed by air conditioners and the hot air generated by operating equipment.

SZB IT Data Box optimises the usability of the data centre infrastructure.

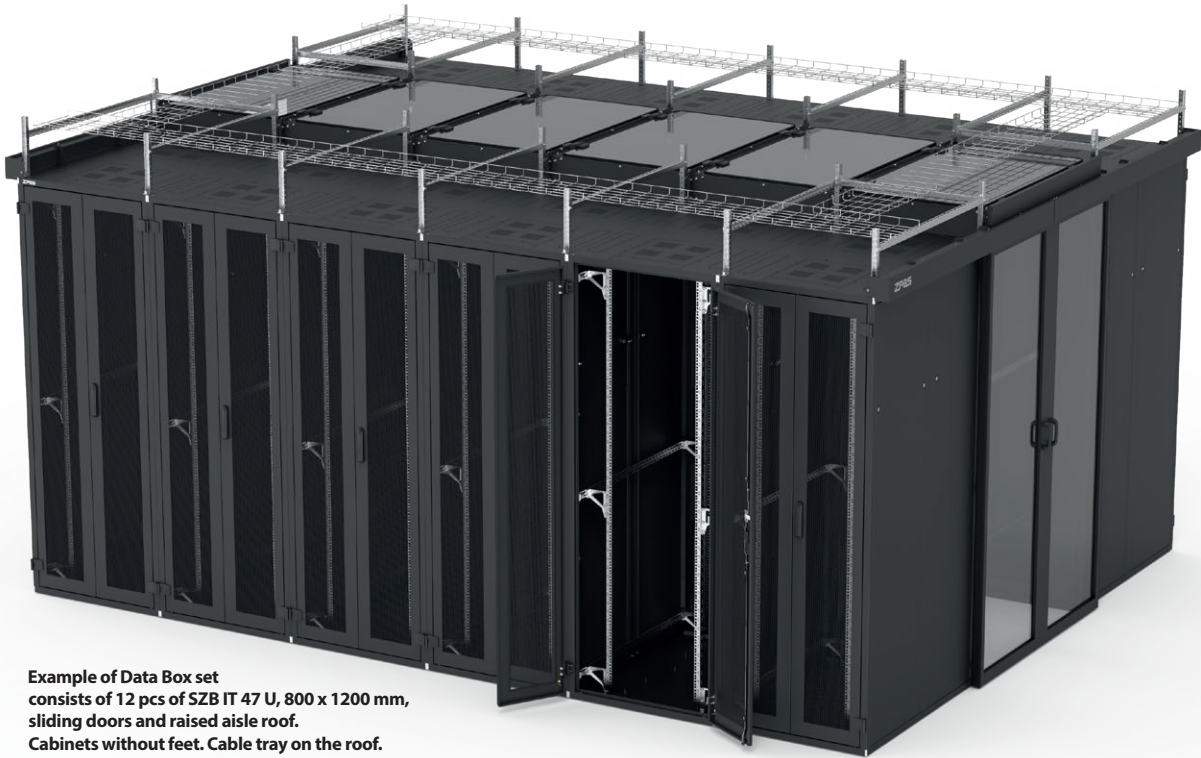

Example of Data Box set consists of 12 pcs of SZB IT 47 U, 800 x 1200 mm, sliding doors and raised aisle roof. Cabinets without feet. Cable tray on the roof.



Example of Data Box set consists of:
4 pcs of SZB IT 42 U, 800 x 1000 mm,
2 pcs of DSR IT 42 U, 800 x 1000 mm
with 2 compartments,
2 pcs of DSR IT 42 U, 800 x 1000 mm
with 4 compartments,
sliding doors, flat aisle roof.
Cabinets on 100 mm plinth.

SERVER CABINETS

SZB/DSR IT 19"

COLD AISLE INSTALLATIONS

Cold aisle sliding door

Manual sliding glass doors without a lock. Opened along the entire width of the aisle. Supplied with a roof masking panel and cabinet side panels.

Designed for cold aisle **1200 mm** wide.

Material

Aluminium profiles; safety glass; sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Two sliding door leaves with rails, runners and self-closer, two or four cabinet side panels (depending on the depth of the cabinets), aisle roof masking panel, fixing accessories.



WZ-8848-01-03-161
Cold aisle sliding door for Data Box 47 U, 1200 mm,
without feet or plinth, with raised roof



WZ-8848-01-06-161
Cold aisle sliding door for Data Box 42 U, 1000 mm,
with plinth and flat roof




WZ-8848-01-06-161
Cold aisle sliding door for Data Box 47 U, 1200 mm,
with feet and raised roof

For Data Box cabinets¹		Catalogue number			
		Sliding door for aisle with raised roof		Sliding door for aisle with flat roof	
height	depth	RAL 7035	RAL 9005	RAL 7035	RAL 9005
42 U without feet or plinth	1000	WZ-8848-20-01-011	WZ-8848-20-01-161	WZ-8848-30-01-011	WZ-8848-30-01-161
	1200	WZ-8848-01-01-011	WZ-8848-01-01-161	WZ-8848-45-01-011	WZ-8848-45-01-161
47 U without feet or plinth	1000	WZ-8848-20-03-011	WZ-8848-20-03-161	WZ-8848-30-03-011	WZ-8848-30-03-161
	1200	WZ-8848-01-03-011	WZ-8848-01-03-161	WZ-8848-45-03-011	WZ-8848-45-03-161
42 U with feet	1000	WZ-8848-20-04-011	WZ-8848-20-04-161	WZ-8848-30-04-011	WZ-8848-30-04-161
	1200	WZ-8848-01-04-011	WZ-8848-01-04-161	WZ-8848-45-04-011	WZ-8848-45-04-161
47 U with feet	1000	WZ-8848-20-06-011	WZ-8848-20-06-161	WZ-8848-30-06-011	WZ-8848-30-06-161
	1200	WZ-8848-01-06-011	WZ-8848-01-06-161	WZ-8848-45-06-011	WZ-8848-45-06-161
42 U with plinth	1000	WZ-8848-20-07-011	WZ-8848-20-07-161	WZ-8848-30-07-011	WZ-8848-30-07-161
	1200	WZ-8848-01-07-011	WZ-8848-01-07-161	WZ-8848-45-07-011	WZ-8848-45-07-161
47 U with plinth	1000	WZ-8848-20-09-011	WZ-8848-20-09-161	WZ-8848-30-09-011	WZ-8848-30-09-161
	1200	WZ-8848-01-09-011	WZ-8848-01-09-161	WZ-8848-45-09-011	WZ-8848-45-09-161

Package: 1 set

SZB/DSR IT^{19"} SERVER CABINETS

COLD AISLE INSTALLATIONS

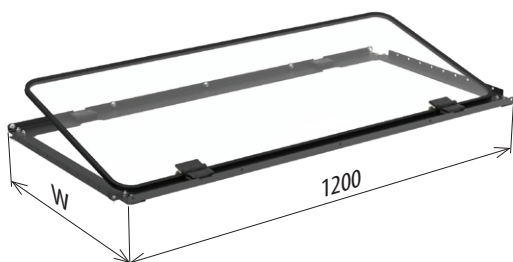

Cold aisle flat roof

Flat roof module for 1200 mm wide cold aisle. The transparent part of the module is tiltable. The modular design allows easy expansion and installation of lighting.

Material


Transparent plastic (polycarbonate); sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Roof module with fixing accessories.

Width W [mm]	Catalogue number	
	RAL 7035	RAL 9005
300	WZ-8848-60-04-011	WZ-8848-60-04-161
400	WZ-8848-60-05-011	WZ-8848-60-05-161
600	WZ-8848-60-02-011	WZ-8848-60-02-161
800	WZ-8848-60-01-011	WZ-8848-60-01-161

Package: 1 pc.

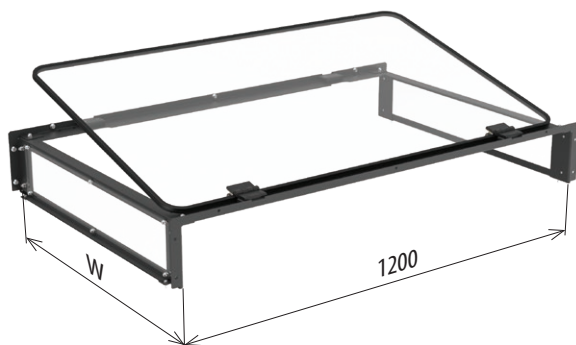

Cold aisle raised roof

Roof module with internal height of 150 mm for 1200 mm wide cold aisle. The top transparent element of the module is tiltable. The modular design allows easy expansion and installation of lighting.

Material

Transparent plastic (polycarbonate); sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Roof module with fixing accessories.

Width W [mm]	Catalogue number	
	RAL 7035	RAL 9005
300	WZ-8848-40-04-011	WZ-8848-40-04-161
400	WZ-8848-40-05-011	WZ-8848-40-05-161
600	WZ-8848-40-02-011	WZ-8848-40-02-161
800	WZ-8848-40-01-011	WZ-8848-40-01-161

Package: 1 pc.

SERVER CABINETS

SZB/DSR IT 19"

COLD AISLE INSTALLATIONS

Partition panel for cabinets baying in row

Side panel of the cabinet adapted as partition between cabinets baying in row. It is with four openings for clamp connectors bolts.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

One-piece or two-piece complete partition panel with locks, fixing pins and an earthing conductor.

For cabinets'		Catalogue number	
height	depth	RAL 7035	RAL 9005
42 U	1200	WZ-8848-24-4212-011	WZ-8848-24-4212-161
	1000	WZ-8848-24-4210-011	WZ-8848-24-4210-161
47 U	1200	WZ-8848-24-4712-011	WZ-8848-24-4712-161
	1000	WZ-8848-24-4710-011	WZ-8848-24-4710-161

Package: 1 pc.



WZ-8848-24-4712-161
Two-parts partition panel
for cabinet SZBIT 47 U, 1200 mm deep

WZ-8848-24-4210-161
Partition panel
for SZB IT 42 U, 1000 mm deep

Set for baying SZB IT cabinets in rows

Set of elements for baying SZB IT cabinets.
One set is intended for baying two cabinets.

Material

Al-Zn coated sheet steel.

Scope of delivery

4 clamp connectors, 4 bolts M8 with nut.

Package	Catalogue number
1 set	WZ-8848-23-00-000



Baying frame posts
without partition panel



Baying frame posts
with partition panel

SZB/DSR IT 19" SERVER CABINETS

COLD AISLE INSTALLATIONS



WZ-8848-50-06-161
Cold aisle cover for Data Box set 47 U
with feet and raised roof

Cold aisle cover

It is an optional solution instead of sliding doors.
Designed for cold aisle **1200 mm** wide.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Cold aisle cover, aisle roof masking panel, sealing (for set on feet only), fixing accessories.



Data Box set 47 U with feet, raised roof
and cold aisle cover

For Data Box with cabinets' height	Catalogue number			
	Cover for aisle with raised roof		Cover for aisle with flat roof	
	RAL 7035	RAL 9005	RAL 7035	RAL 9005
42 U without feet or plinth	WZ-8848-50-01-011	WZ-8848-50-01-161	WZ-8848-50-10-011	WZ-8848-50-10-161
47 U without feet or plinth	WZ-8848-50-03-011	WZ-8848-50-03-161	WZ-8848-50-12-011	WZ-8848-50-12-161
42 U with feet	WZ-8848-50-04-011	WZ-8848-50-04-161	WZ-8848-50-13-011	WZ-8848-50-13-161
47 U with feet	WZ-8848-50-06-011	WZ-8848-50-06-161	WZ-8848-50-15-011	WZ-8848-50-15-161
42 U with plinth	WZ-8848-50-07-011	WZ-8848-50-07-161	WZ-8848-50-16-011	WZ-8848-50-16-161
47 U with plinth	WZ-8848-50-09-011	WZ-8848-50-09-161	WZ-8848-50-18-011	WZ-8848-50-18-161

Package: 1 set

SERVER CABINETS

SZB/DSR IT 19"

COLD AISLE INSTALLATIONS

Sealing masking strip for cabinet on feet

Sealing masking strip protects from getting cold air from the aisle to the space under the cabinet.

Material


Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005), black plastic.

Scope of delivery

Sealing masking strip with fixing accessories.

For cabinets' width [mm]	Catalogue number	
	RAL 7035	RAL 9005
800	WZ-8848-27-01-011	WZ-8848-27-01-161
600	WZ-8848-27-02-011	WZ-8848-27-02-161

Package: 1 pc

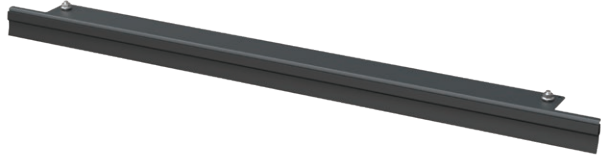


Cabinet equipped with sealing masking strip

Aisle lightening

Aisle can be equipped with modular lightening.

Available on request.

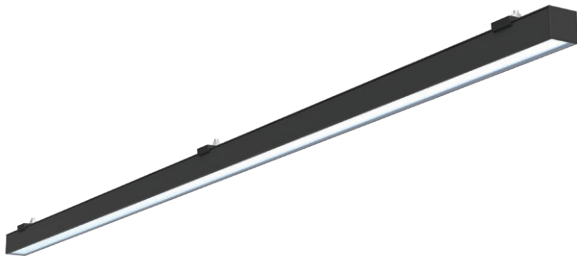


Example of light fittings mounted under the roof of the aisle

Cable trays systems

Data Box set can be equipped with cable trays system assembled on cabinets.

Available on request.

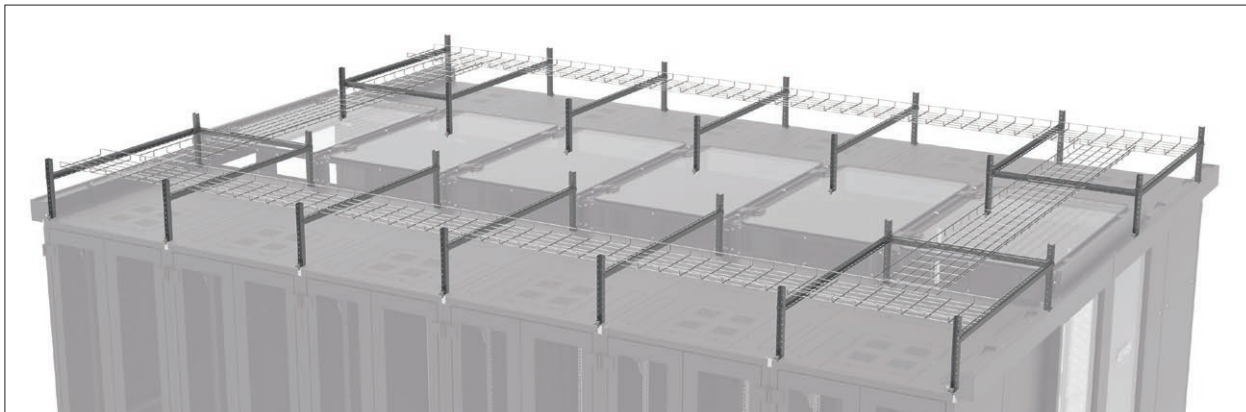

SZE2 PC 19" COMPUTER CABINET IP54



CABINET DESIGNED FOR COMPUTER EQUIPMENT IN ROOMS WITH HEAVY DUST CONCENTRATIONS

- Designed for protection of computer equipment used in industrial areas.
- The design enables selective admission of access to each section of the cabinet through use of locks with different cylinders.
- Design based on modified frame of the SZE2 cabinet.
- Easy baying in rows with SZE2 and SZE2 PC cabinets.
- Possibility of using supplementary accessories designed for SZE2 cabinets (see catalogue ZPAS Industrial Enclosures) and equipment for 19" installations.
- Possibility to manufacture cabinet frame, door, panels, supplementary roof and plinth of stainless sheet steel (on individual request).
- Non-standard versions on customer's request.

SCOPE OF DELIVERY

- cabinet's frame set on 100 mm plinth,
- 2 pairs of 19" mounting profiles,
- 2 flushed side panels,
- double front door with 3-point (rod-lath) lock and patent cylinder (upper door with glass, lower door solid),
- door for keyboard part with single-point lock (cam lock),
- rear panel,
- universal drawer for keyboard,
- solid blanking plate for top including sealing gasket,
- sliding gland plates for adjustable cable entry.



TECHNICAL DATA

Material

Frame, side panels, solid metal door, plinth, mounting profiles

- sheet steel

Door with glass - sheet steel, acrylic glass

Protection degree

IP 54 in accordance with EN 60529

Surface finishing

Frame, door, panels, plinth - powder painted in light grey (RAL 7035). All other colour options on request.

Mounting profiles – Al-Zn coated.

Maximum load capacity

The maximum weight of equipment mounted in SZE2 PC cabinets is:

600 kg - for cabinet with plinth,

500 kg - for cabinet with castors type 300 (page 63)


Roof - supplementary accssesories
(see page 74)



COMPUTER CABINET IP54 **SZE2 PC 19"**

REFERENCE CHART

Width W [mm]	Depth D [mm]	Catalogue number		
600	600	WZ-3004-00-06-011	WZ-3004-00-04-011	WZ-3004-00-02-011
	800	WZ-3004-00-05-011	WZ-3004-00-03-011	WZ-3004-00-01-011
Usable height of cabinet HU [U = 44.45 mm]	complete cabinet HU	33 U	38 U	42 U
	upper part HU1	10 U	15 U	19 U
	lower part HU2	18 U	18 U	18 U
Total height of cabinet without plinth H [mm]		1600	1800	2000

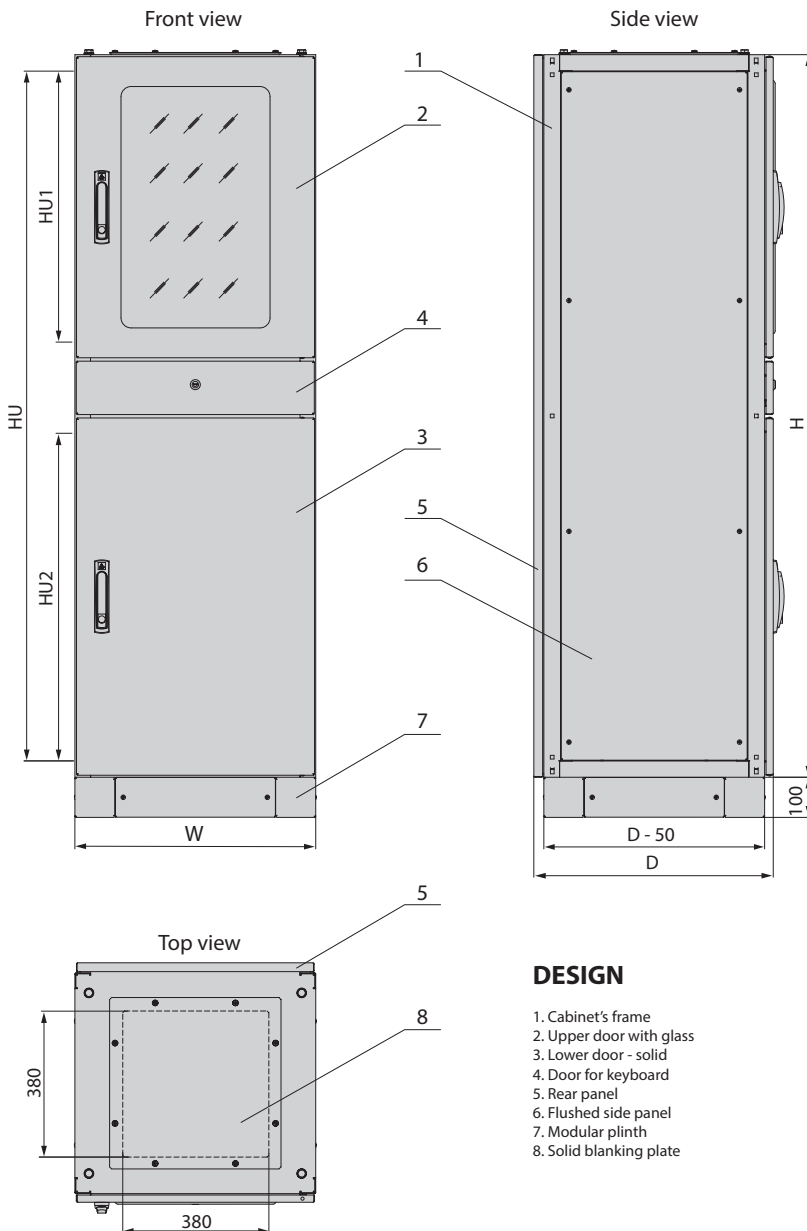

DESIGN

1. Cabinet's frame
2. Upper door with glass
3. Lower door - solid
4. Door for keyboard
5. Rear panel
6. Flushed side panel
7. Modular plinth
8. Solid blanking plate




Note:

The opening in the bottom plate of the SZE2 PC cabinet is identical as in the SZE2 cabinet (see catalogue ZPAS Industrial Enclosures).

SJB 19" NETWORK CABINET



SJB 15 U cabinet finished in RAL 7035, without desktop

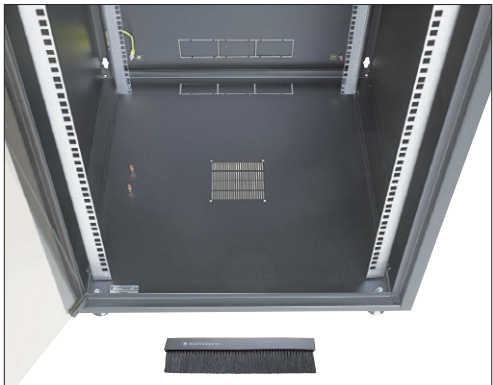

View of the bottom plate in the SJB cabinet. On the back of the cabinet there are cable openings covered with knock-out blanking plate which can be replaced with a brush strip (one brush strip is factory-mounted on the top plate, the other one can be ordered as supplementary accessories).

CABINET FOR OFFICE APPLICATIONS

- SJB cabinets are perfect solution for small network systems installed in offices.
- The design of the cabinet is based on a self-supporting body with no frame.
- The cabinet can have a desktop made of furniture board to easily blend in with the existing interior décor.

TECHNICAL DATA

Material

Body, rear panel, mounting angles - sheet steel
Door - safety glass

Protection degree

IP 20 in accordance with EN 60529

Surface finishing

Body and rear panel – powder painted in light grey (RAL 7035) or black (RAL 9005).
Mounting angles – Al-Zn coated.


SCOPE OF DELIVERY

- cabinet body with safety glass door and removable rear panel,
- 2 pairs of mounting angles spaced at 19",
- 4 levelling feet,
- rear panel earthing conductor,
- brush strip for the cable opening.

SUPPLEMENTARY ACCESSORIES (ordered separately)

- desktop - available in three different colours (page 47),
- desktop elevation kit - spacing sleeves (page 47),
- castors (page 46),
- earthing bar (page 58),
- brush strip for the cable opening (page 47),
- shelves, blanking plates, fan, power strips etc. (pages 58, 64-65, 76, 79-81, 96).

NETWORK CABINET SJB 19"

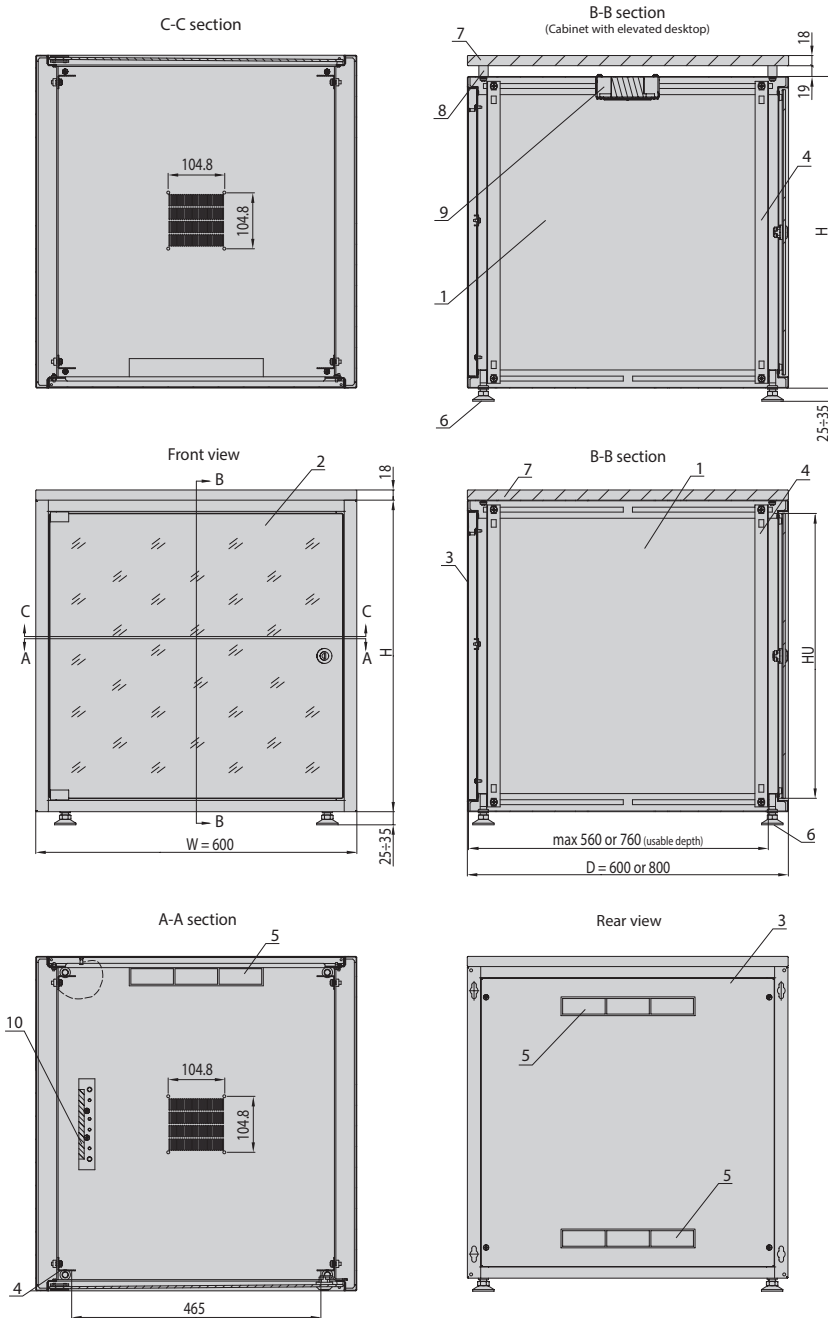

**SJB 15 U cabinet
finished in RAL 9005, with desk-
top made of Calvados-laminated
MDF board**

DESIGN

1. Cabinet's body
2. Glass door
3. Rear panel
4. Mounting angle
5. Knock-out blanking plate
6. Levelling feet

Supplementary accessories
ordered separately:

7. Desktop (page 47)
8. Spacing sleeve for roof elevation
(page 47)
9. Fan (page 58)
10. Earthing bar (page 58)

REFERENCE CHART

Total width W [mm]	Total depth D [mm]	Body height H [mm]	Usable height HU [U = 44.45 mm]	Maximum load capacity [kg]	Catalogue number of cabinet without desktop*	
					Cabinet finished in RAL 7035	Cabinet finished in RAL 9005
600	600	604	12 U	30	WZ-3987-01-02-011-BBL	WZ-3987-01-02-161-BBL
		737	15 U	38	WZ-3987-01-03-011-BBL	WZ-3987-01-03-161-BBL
		871	18 U	45	WZ-3987-01-04-011-BBL	WZ-3987-01-04-161-BBL
	800	737	15 U	38	WZ-6729-01-03-011-BBL	WZ-6729-01-03-161-BBL
		871	18 U	45	WZ-6729-01-04-011-BBL	WZ-6729-01-04-161-BBL

*) The desktop is ordered separately - see page 47

SJB 19" NETWORK CABINET

SUPPLEMENTARY ACCESSORIES



SJB 15 U cabinet finished in RAL 9005, equipped with black desktop, castors and other accessories



Castors for SJB cabinet

Plastic castors, mounted on a steel bolt M8.
Height of the castors (without fixing bolt): 62 mm

Scope of delivery

Set: 4 screws M6x30, 4 washers,
4 spacing sleeves

Package	Catalogue number
1 set	WZ-3987-20-00-000

NETWORK CABINET SJB 19"

SUPPLEMENTARY ACCESSORIES

Desktop

18 mm thick furniture desktop for mounting on the top plate of SJB cabinet.

Available in three color versions.

Material

Laminated MDF board.

Scope of delivery

Desktop with fixing accessories.

Colour	Dimensions [mm]	Catalogue number
Calvados	600 x 600	WZ-3987-07-00-000
	600 x 800	WZ-6455-06-00-000
Black	600 x 600	WZ-3987-07-00-161
Light grey	600 x 800	WZ-6455-06-00-U112

Package: 1 pc.



Calvados



Black



Light grey

Desktop elevation kit

The kit makes it possible to elevate the desktop by 19 mm over the top plate, thus increasing air flow through the cabinet, and enables fan mounting to the top plate.

Scope of delivery

Set: 4 screws M6x30, 4 washers, 4 spacing sleeves.

Package	Catalogue number
1 set	WZ-3987-90-00-000



Brush strip for cable opening

For blinding cable openings in SJB cabinet following the removal of blanking plates.

Material

Plastic.

Scope of delivery

Brush strip, 250 mm long.

Package	Catalogue number
1 pc.	WZ-3504-22-00-000



Cross profile

Horizontally mounted to the rear wall of SJB cabinet.


Material

Al-Zn coated sheet steel.


Scope of delivery

Cross profile with fixing accessories.

Package	Catalogue number
1 pc.	WZ-2048-24-01-000

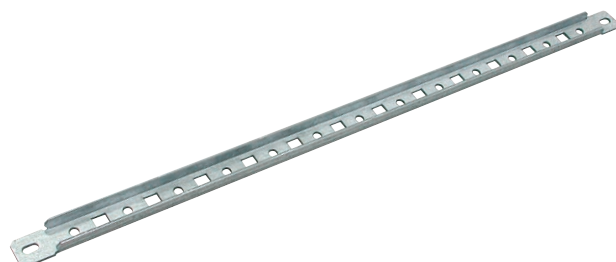

SRD 19" OPEN RACK

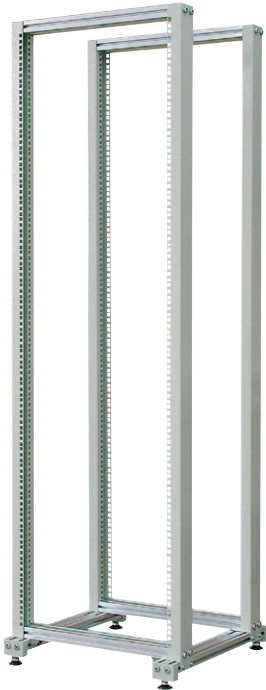

OPEN RACK WITH FULLY ADJUSTABLE 19" RACK FRAMES

- Modular design based on horizontal aluminium profiles and vertical steel posts.
- Open racks are set on levelling feet.
- Various supplementary accessories are available as for data telecom cabinets
 - castors, shelves, drawers, power strips etc.



REFERENCE CHART

HU [U = 44.45 mm]	H [mm]	Maximum load capacity [kg]	Catalogue number
24 U	1177	150	WZ-6170-01-05-011
36 U	1709	150	WZ-6170-01-06-011
42 U	1975	150	WZ-6170-01-07-011

TECHNICAL DATA

Material
Sheet steel,
aluminium profile
60 x 30 mm

Surface finishing
Powder paint, light grey
(RAL 7035).
All other colour options
on request.

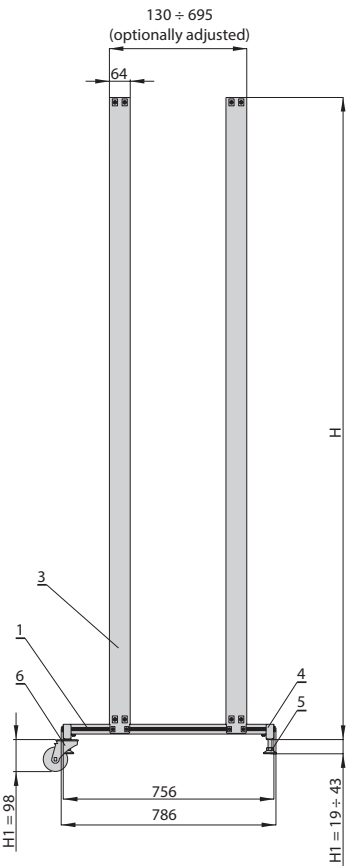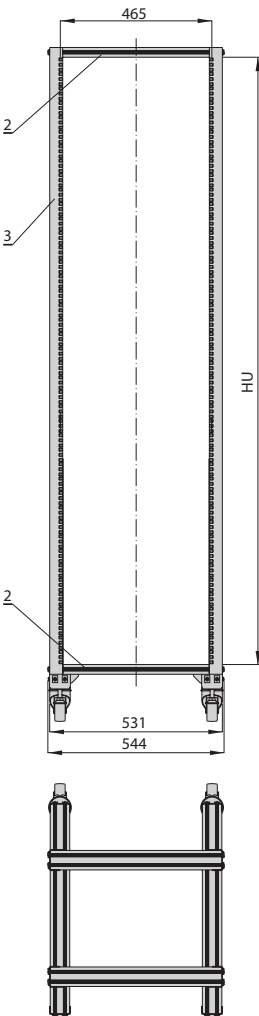

DESIGN

1. Base profile
2. Cross profile
3. Rack's post
4. Chassis of levelling feet or castors
5. Levelling feet



Supplementary accessories:
6. Castors (see page 62)

OPEN RACK **SRX 19"****OPEN RACK WITH STEP ADJUSTABLE 19" RACK FRAMES**

- Made of two 19" welded frames that are fastened to the doublepart chasis with screws.
- Positioning of the frames is based on a 50 mm pitch pattern.
- Standard rack is placed on levelling feet.
- Possibility for using some elements of supplementary equipment for data telecom cabinets - castors, shelves, drawers, power strips etc.

REFERENCE CHART

HU [U = 44.45 mm]	H [mm]	Maximum load capacity [kg]	Catalogue number
24 U	1185	250	WZ-6026-01-01-011
36 U	1719	250	WZ-6026-01-02-011
42 U	1985	250	WZ-6026-01-04-011

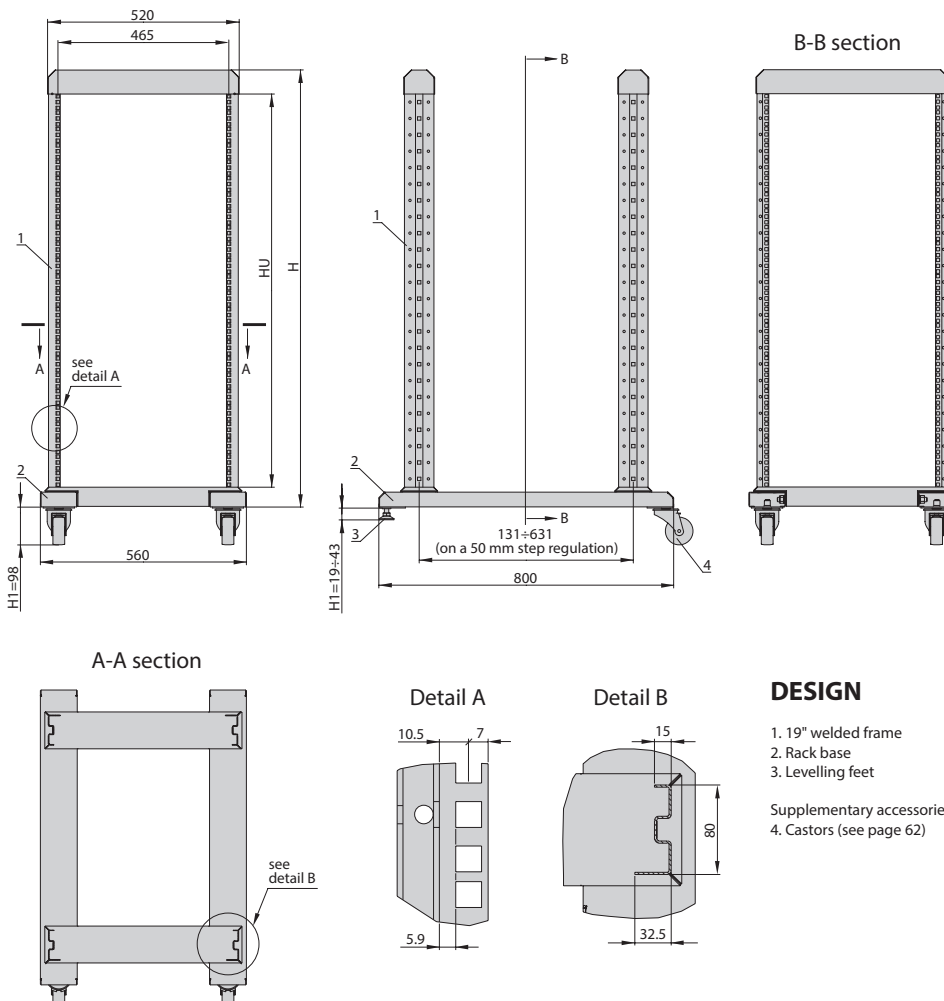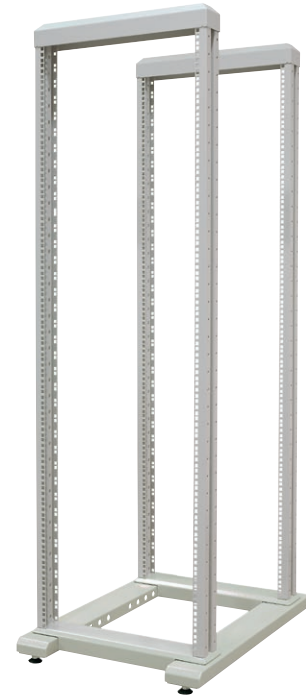**TECHNICAL DATA**

Material
Sheet steel

Surface finishing
Powder paint, light grey (RAL 7035).
All other colour options on request.

DESIGN

1. 19" welded frame
2. Rack base
3. Levelling feet

Supplementary accessories:
4. Castors (see page 62)

WALL-MOUNTED CABINETS



WALL-MOUNTED CABINETS

WALL-MOUNTED CABINETS



Z-BOX

Z-CUBE

Z-BOX 19" WALL-MOUNTED NETWORK CABINET



Cabinet with glass door



Cabinet with metal door

SINGLE-SECTION CABINET WITH REMOVABLE SIDE PANELS

- Designed for indoor applications.
- Available in 1 depth (600 mm) and 5 usable heights (from 6 to 18 U).
- The cabinet is made of bolted framework (composed of 3 frames), top plate, bottom plate, side panels, rear panel and front door.
- Cabinet is equipped with two adjustable 19" mounting profiles.
- Top and bottom plates have cable openings covered with knock-out blanking plates, and 3 venting holes for each plate.
- Door, side panels and mounting profiles can be installed without tools.
- The entire weight of the devices installed inside the cabinet is transferred onto its framework.
- Side panels can be removed after opening the door.

TECHNICAL DATA

Protection degree

IP 20 in accordance with EN 60529

Maximum load capacity

100 kg

Material

sheet steel, safety glass, aluminium profiles

Surface finishing

frame, metal door, panels, top and bottom plates,
glass door side profiles – powder paint, light grey (RAL 7035).
Mounting profiles – Al-Zn coated.



SCOPE OF DELIVERY

Frame, bottom plate, top plate, door, 2 side panels, rear panel,
2 mounting profiles, template for drilling holes in the wall.


REFERENCE CHART

External dimensions			Usable height HU [U = 44.45 mm]	Catalogue number	
Width W [mm]	Depth D [mm]	Height H [mm]		Cabinet with glass door	Cabinet with metal door
600	600	365	6 U	WZ-7240-20-A1-011-BNP	WZ-7240-20-M1-011
		543	10 U	WZ-7240-20-A2-011-BNP	WZ-7240-20-M2-011
		632	12 U	WZ-7240-20-A3-011-BNP	WZ-7240-20-M3-011
		765	15 U	WZ-7240-20-A4-011-BNP	WZ-7240-20-M4-011
		899	18 U	WZ-7240-20-A5-011-BNP	WZ-7240-20-M5-011

WALL-MOUNTED NETWORK CABINET

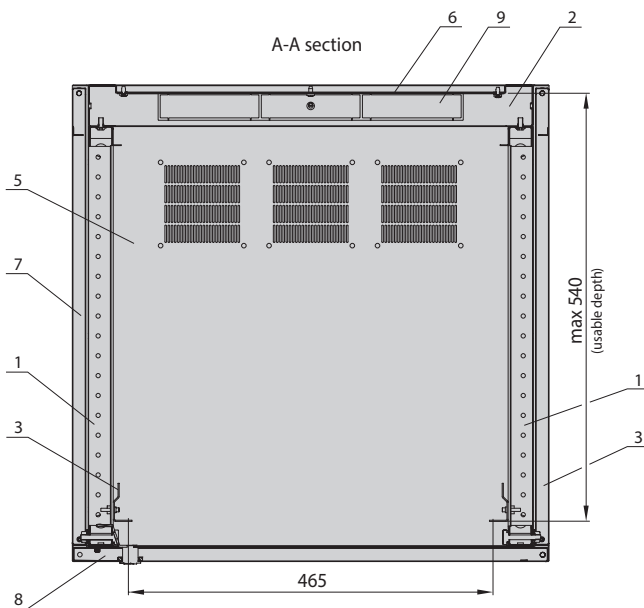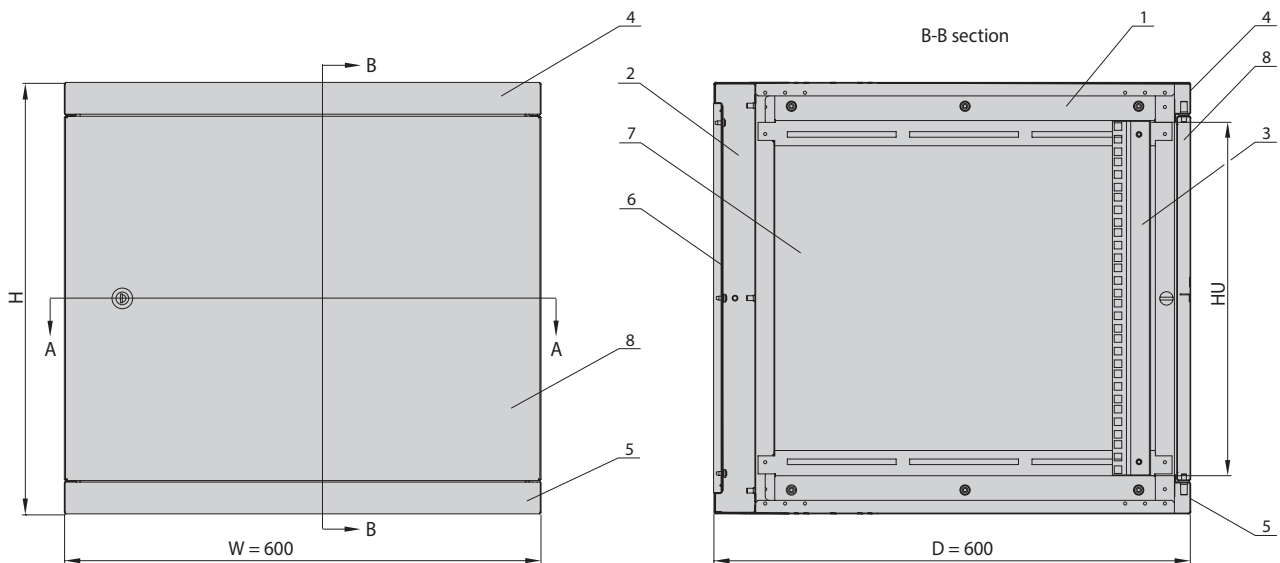Z-BOX 19"**DESIGN**

- 1. Side part of cabinet's frame
- 2. Rear part of cabinet's frame
- 3. Mounting profile
- 4. Top plate
- 5. Bottom plate
- 6. Rear panel
- 7. Side panel
- 8. Door
- 9. Knock-out blanking plate

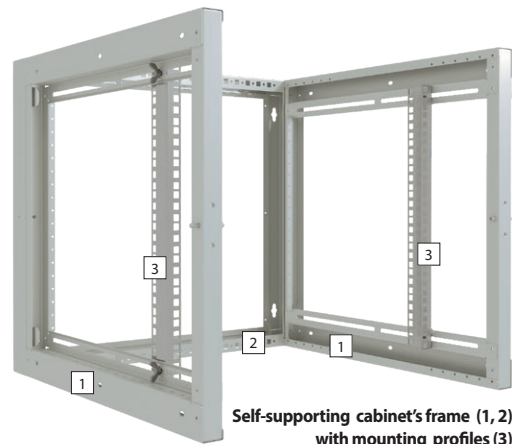

**Self-supporting cabinet's frame (1, 2)
with mounting profiles (3)**



See the video:
zpas.pl/qr/f11

Z-CUBE 19"

WALL-MOUNTED NETWORK CABINET



Z-CUBE 600, 21 U
with glass door



Z-CUBE 600, 15 U
with glass door



Z-CUBE 150, 6 U



Z-CUBE 450, 6 U
with rear panel
(additional
element)

SINGLE OR DOUBLE-SECTION WALL-MOUNTED CABINETS WITH REMOVABLE SIDE PANELS

- Designed for indoor applications.
- Available in two depths (450 and 600 mm) and six usable heights (from 6 to 21 U).
- The cabinet 450 mm deep can be equipped with an additional body, fixed to its rear wall with two or three hinges and a lock. This creates a double-section cabinet 600 mm deep.
- The design of the cabinet is based on a welded body, glass or metal front door and two removable side panels.
- The cabinet is equipped with two adjustable 19" mounting angles with depth regulation.
- Top and bottom plates have cable openings covered with knock-out blanking plates and venting grids with holes for fan assembling.
- Door and side panels can be installed without tools.
- It is possible to change door opening direction and opening of the additional rear body direction.
- Bodies, door and side panels are equipped with earthing pins.
- Rear panel available as an additional element.

TECHNICAL DATA

Protection degree

IP 20 in accordance with EN 60529
(if the cabinet is mounted on the solid flat wall or equipped with rear panel).

Maximum load capacity

60 kg for Z-CUBE 600 and Z-CUBE 450 single-section cabinets,
30 kg for Z-CUBE 450+150 double-section cabinet.

Material

Sheet steel, clear mineral safety glass.

Surface finishing

Body, side panels, side elements of glass door – powder paint,
light grey (RAL 7035).

Mounting angles – Al-Zn coated.


SCOPE OF DELIVERY

Z-CUBE 600 or 450 single-section cabinet:

body, door with a lock, 2 side panels with one lock each,
2 mounting angles.


Z-CUBE 150 rear body for Z-CUBE 450 cabinet:

body, 2 or 3 hinges, 1 lock.

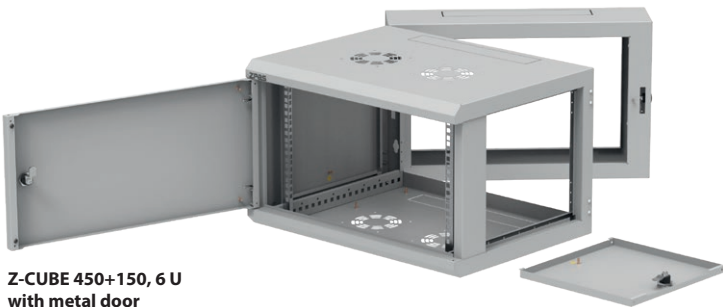

Z-CUBE 450+150, 6 U
with metal door

WALL-MOUNTED NETWORK CABINET Z-CUBE 19"

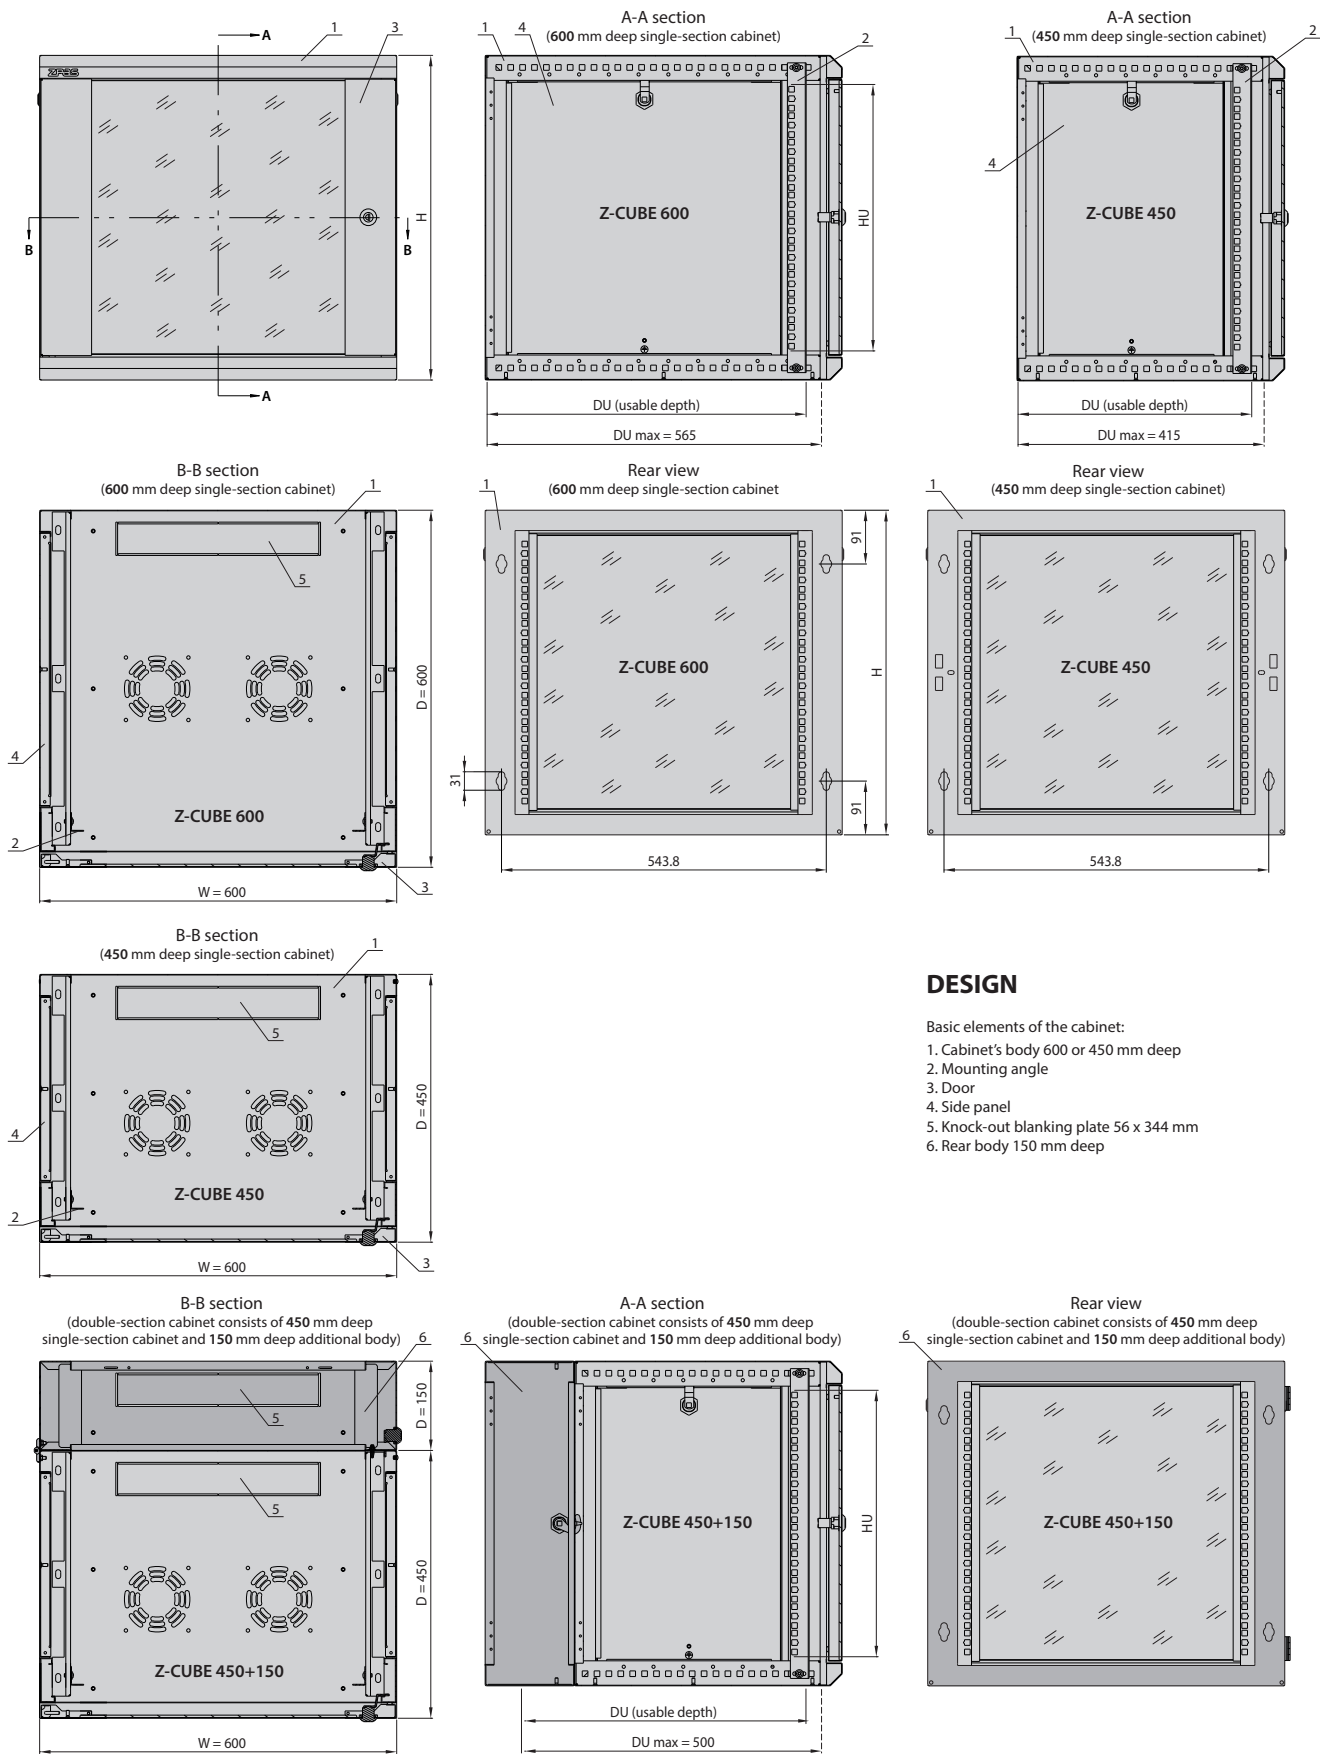

DESIGN

- Basic elements of the cabinet:
1. Cabinet's body 600 or 450 mm deep
 2. Mounting angle
 3. Door
 4. Side panel
 5. Knock-out blanking plate 56 x 344 mm
 6. Rear body 150 mm deep

Z-CUBE 19" WALL-MOUNTED NETWORK CABINET



REFERENCE CHART

Product name	With W [mm]	Depth D [mm]	Height H [mm]	Usable height HU [U = 44.45 mm]	Catalogue number
Z-CUBE 600 wall-mounted cabinet with glass door	600	600	368	6 U	WZ-8180-30-01-011
			546	10 U	WZ-8180-30-02-011
			634	12 U	WZ-8180-30-03-011
			767	15 U	WZ-8180-30-04-011
			900	18 U	WZ-8180-30-05-011
			1033	21 U	WZ-8180-30-06-011
Z-CUBE 600 wall-mounted cabinet with metal door	600	600	368	6 U	WZ-8180-30-M1-011
			546	10 U	WZ-8180-30-M2-011
			634	12 U	WZ-8180-30-M3-011
			767	15 U	WZ-8180-30-M4-011
			900	18 U	WZ-8180-30-M5-011
			1033	21 U	WZ-8180-30-M6-011
Z-CUBE 450 wall-mounted cabinet with glass door	600	450	368	6 U	WZ-8180-20-01-011
			546	10 U	WZ-8180-20-02-011
			634	12 U	WZ-8180-20-03-011
			767	15 U	WZ-8180-20-04-011
			900	18 U	WZ-8180-20-05-011
			1033	21 U	WZ-8180-20-06-011
Z-CUBE 450 wall-mounted cabinet with metal door	600	450	368	6 U	WZ-8180-20-M1-011
			546	10 U	WZ-8180-20-M2-011
			634	12 U	WZ-8180-20-M3-011
			767	15 U	WZ-8180-20-M4-011
			900	18 U	WZ-8180-20-M5-011
			1033	21 U	WZ-8180-20-M6-011
Z-CUBE 150 rear body (for Z-CUBE 450 wall-mounted cabinet)	600	150	368	6 U	WZ-8180-16-01-011
			546	10 U	WZ-8180-16-02-011
			634	12 U	WZ-8180-16-03-011
			767	15 U	WZ-8180-16-04-011
			900	18 U	WZ-8180-16-05-011
			1033	21 U	WZ-8180-16-06-011

SUPPLEMENTARY ACCESSORIES FOR WALL-MOUNTED CABINETS

Rear panel

To close the rear of the **Z-CUBE** cabinet.

Material

Sheet steel powder painted in light grey (RAL 7035).

Scope of delivery

Rear panel with fixing accessories.

Product name	Height [U = 44.45 mm]	Catalogue number
Rear panel for Z-CUBE wall-mounted cabinet	6 U	WZ-8180-17-01-011
	10 U	WZ-8180-17-02-011
	12 U	WZ-8180-17-03-011
	15 U	WZ-8180-17-04-011
	18 U	WZ-8180-17-05-011
	21 U	WZ-8180-17-06-011

Package: 1 pc.



Rear panel 10 U

Mounting profiles, mounting angles

Additional pair of 19" mounting profiles or mounting angles.

Material


Sheet steel, Al-Zn coated.

Scope of delivery


Two mounting angles/profiles with fixing accessories.

Product name	Height [U = 44.45 mm]	Catalogue number
Set of mounting profiles for Z-BOX cabinet	6 U	WZ-7240-31-02-000
	10 U	WZ-7240-31-03-000
	12 U	WZ-7240-31-04-000
	15 U	WZ-7240-31-05-000
	18 U	WZ-7240-31-06-000
	21 U	WZ-7240-31-07-000
Set of mounting angles for Z-CUBE cabinet	6 U	WZ-8180-40-01-000
	10 U	WZ-8180-40-02-000
	12 U	WZ-8180-40-03-000
	15 U	WZ-8180-40-04-000
	18 U	WZ-8180-40-05-000
	21 U	WZ-8180-40-06-000

Package: 1 set = 2 pcs

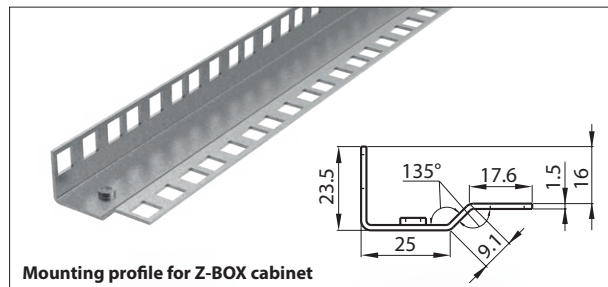

Mounting profile for Z-BOX cabinet

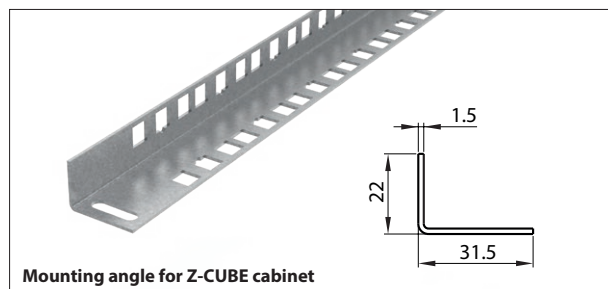

Mounting angle for Z-CUBE cabinet

Wall-fastening brackets

Designed for **Z-BOX** and **Z-CUBE** cabinets.


Material

Zinc-coated sheet steel.

Scope of delivery

Set of 4 brackets with fixing accessories.

Product name	Package	Catalogue number
Brackets 20 mm deep	1 set = 4 pcs	WZ-2048-50-01-000
Brackets 40 mm deep	1 set = 4 pcs	WZ-2048-50-02-000

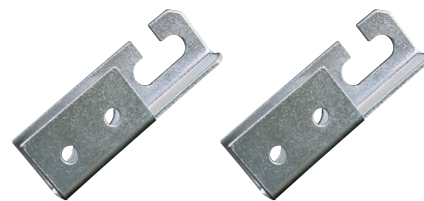

SUPPLEMENTARY ACCESSORIES FOR WALL-MOUNTED CABINETS



Fan kit


Fan kit

Mounted it the top or bottom plate of **Z-BOX**, **Z-CUBE** or **SJB** cabinets. Power supply: 230 V, 50 Hz; power: 22 W; capacity: 165 m³/h.; noise level: ca 40 dB

Scope of delivery

Set: 1 fan with protection grid, power lead 1.0 m long, fixing accessories.

Package	Catalogue number
1 set	WN-0200-04-00-000

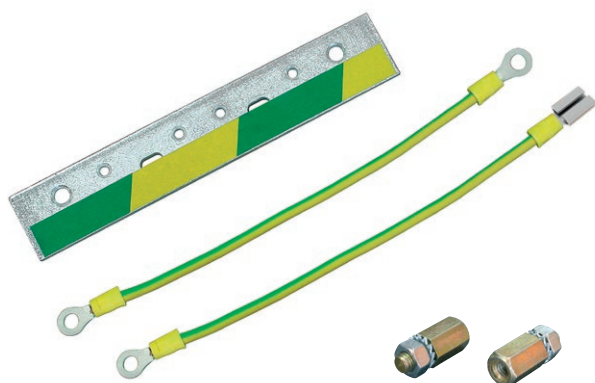

Earthing elements

Earthing elements**Earthing bar**

- With threaded M5 openings for fixing conductors.
- Material: zinc coated steel bar 30 x 4 x 170 mm

Earthing conductors

- Insulated copper conductors with contact eyes for M5 screws.
- Material: copper wires, cross-section 6 mm².

Scope of delivery

Earthing elements are supplied with fixing accessories for installation inside the cabinet.

Product name	Catalogue number
Earthing set for Z-BOX cabinet	WZ-7240-A0-00-000
Earthing set for Z-CUBE cabinet	WZ-2733-13-00-000

Package: 1 set

**Brush strip for cable opening**

For blinding cable opening following the removal of blanking plate.

Material

Plastic.


Scope of delivery

Brush strip without fixing accessories.

Product name	Catalogue number
Brush strip for Z-CUBE cabinet	WZ-8180-19-00-000

Package: 1 pc.

ACCESSORIES FOR CABINETS AND OPEN RACKS

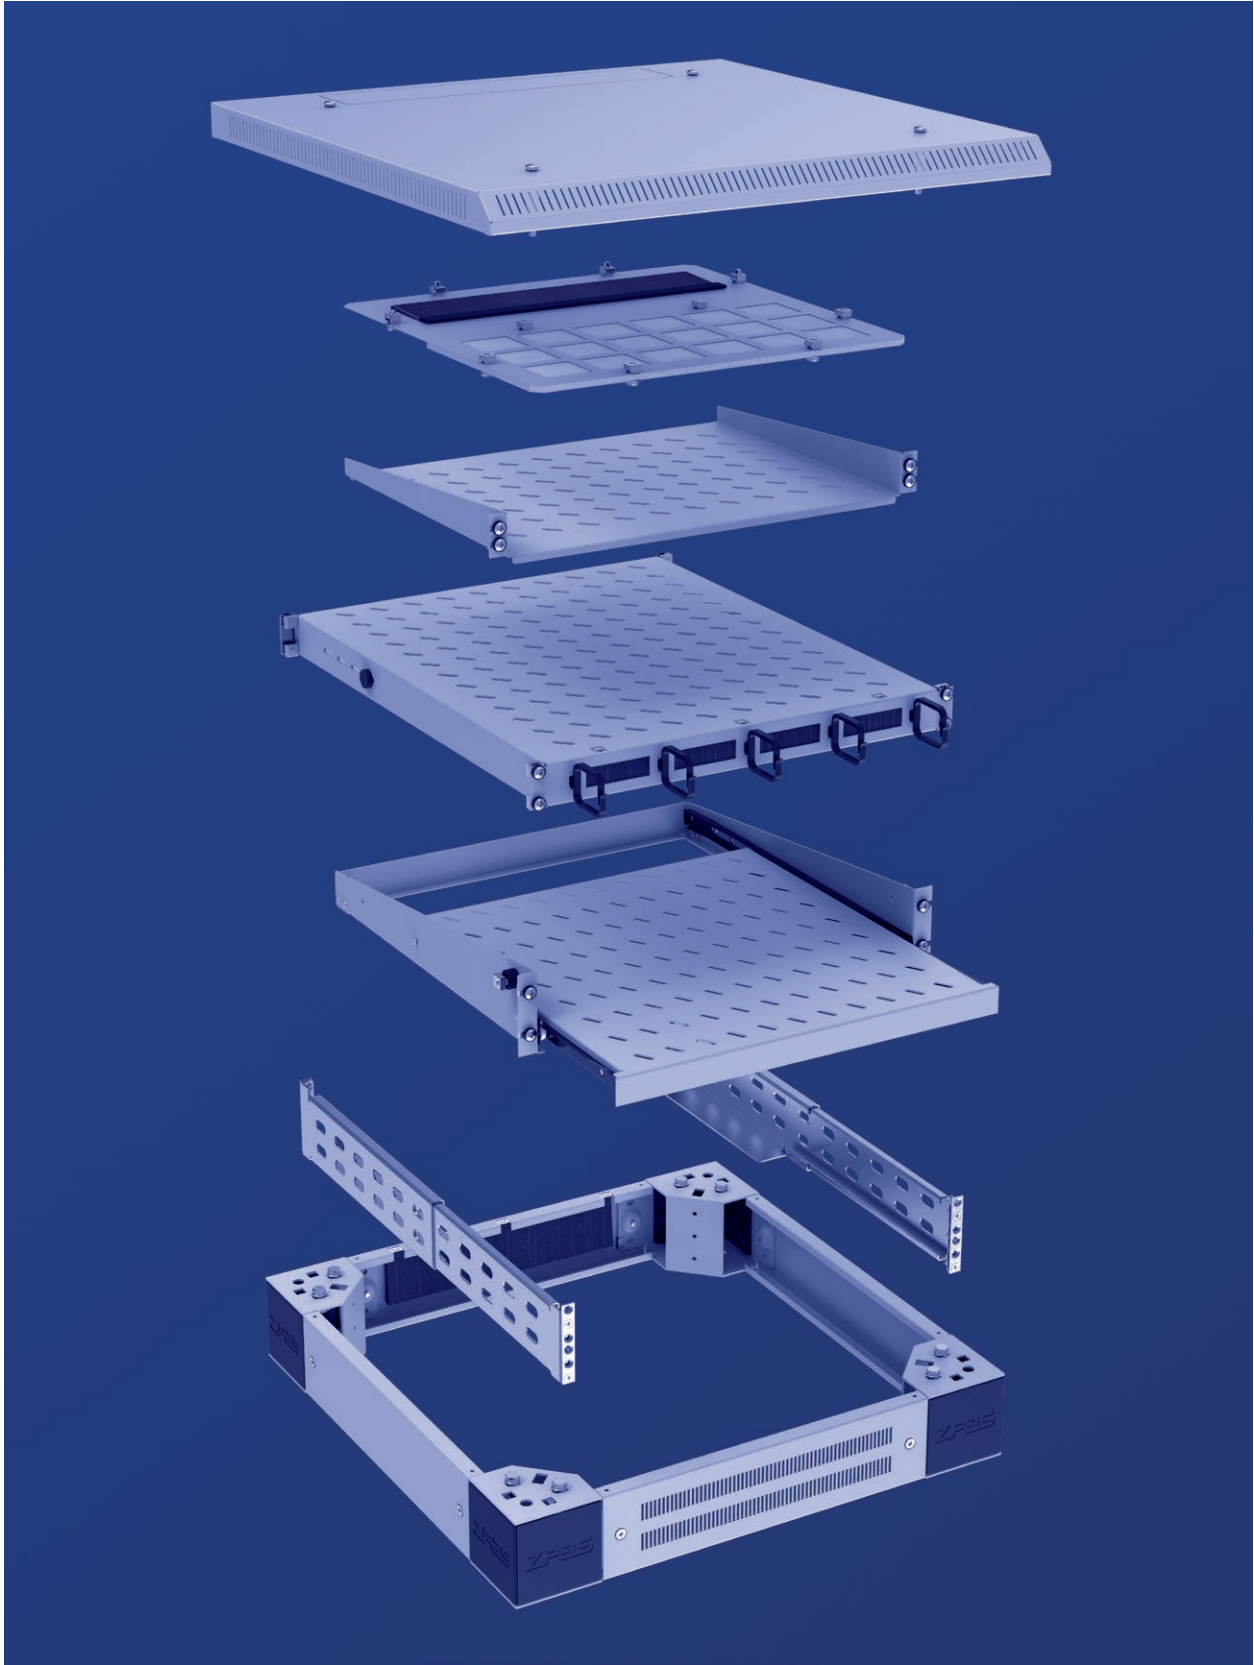

ACCESSORIES FOR CABINETS AND OPEN RACKS

ACCESSORIES FOR CABINETS AND OPEN RACKS

BASE



Solid side panel



Perforated side panel



Side panel with brush opening

Plinth

Plinth consists of corners and side panels.

Each part shall be ordered separately.

For cabinets: **Z-SERVER, SZB IT, DSR IT.**

Possibility of connecting the plinths in rows or stacked.

Plinth side panels

There are three types of plinth side panels available. Side panels can be removed even when the cabinet is loaded with equipment.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Panel with fixing elements.

Product name	Length of side panel [mm]	Length of plinth's side [mm]	Catalogue number	
			RAL 7035	RAL 9005
Solid side panel	400	600	WZ-6935-46-05-011	WZ-6935-46-05-161
	600	800	WZ-6935-46-03-011	WZ-6935-46-03-161
	800	1000	WZ-6935-46-02-011	WZ-6935-46-02-161
	1000	1200	WZ-6935-46-01-011	WZ-6935-46-01-161
Perforated side panel	400	600	WZ-6935-92-05-011	WZ-6935-92-05-161
	600	800	WZ-6935-92-03-011	WZ-6935-92-03-161
	800	1000	WZ-6935-92-02-011	WZ-6935-92-02-161
	1000	1200	WZ-6935-92-01-011	WZ-6935-92-01-161
Side panel with brush opening	400	600	WZ-6935-94-05-011	WZ-6935-94-05-161
	600	800	WZ-6935-94-03-011	WZ-6935-94-03-161
	800	1000	WZ-6935-94-02-011	WZ-6935-94-02-161
	1000	1200	WZ-6935-94-01-011	WZ-6935-94-01-161

Package: 1 pc

Plinth corners

Corners are equipped with removable plates that ease the access to assembling and levelling elements.

Corners can be equipped with levelling set or vibro-shock absorbers.

Material

Body: sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).


Covers: black plastic.

Scope of delivery

Set of 4 corners include fixing accessories for SZB IT, DSR IT and Z-SERVER cabinets.

Product name	Height [mm]	Catalogue number	
		RAL 7035	RAL 9005
Set of 4 plinth corners	100	WZ-6935-74-00-011	WZ-6935-74-00-161

Package: 1 set

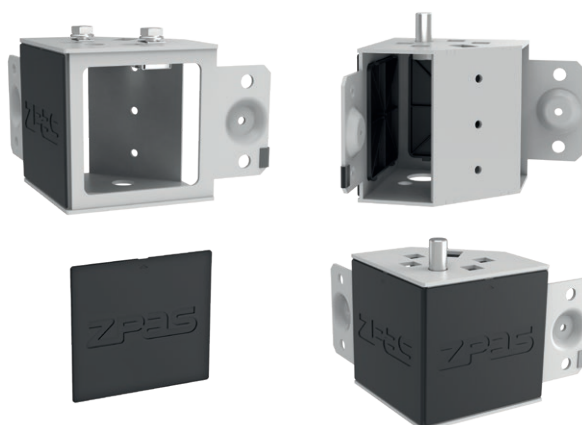

Corner with fixing elements for SZB IT and DSR IT cabinets

Corner with fixing elements for Z-SERVER cabinet

ACCESSORIES FOR CABINETS AND OPEN RACKS

BASE

Vibro-shock absorbers

Vibro-shock absorbers reduce the transmission of possible vibrations between the floor and the cabinet (e.g. in industrial buildings). Plinth with vibro-shock absorbers should be fixed into the room's floor.

Material

10 mm thick rubber.

Scope of delivery

Set of 4 vibro-shock absorbers.

Package	Catalogue number
1 set	WZ-M1Z-00-0048-000-4



Vibro-shock absorber



Plinth corner with vibro-shock absorber

Sets for plinth levelling

Plinth corners can be equipped with additional levelling bolts, that enable stable setting of the cabinet on uneven floor.

Adjustment range: 0–10 mm

Product name	Package	Catalogue number
Set of 4 plinth levelling bolts for SZB IT or DSR IT cabinet	1 set	WZ-6935-Z1-02-000
Set of 4 plinth levelling bolts for Z-SERVER cabinet	1 set	WZ-6935-Z1-01-000



Plinth levelling bolt for SZB IT or DSR IT cabinet




Plinth levelling bolt for Z-SERVER cabinet



Plinth corner equipped with levelling bolt for SZB IT or DSR IT cabinet

In order to fasten the levelling bolt in the corner and join the corner with the cabinet, 2 pcs. of M8 bolts with washers are used (delivered with the plinth corner).



Plinth corner equipped with levelling bolt for Z-SERVER cabinet

Top part of levelling bolt is used for join the corner with the cabinet.

Set of elements for connecting plinths

Plinths can be joined in row or stacked.

Joining in rows

In order to join two plinths, one connecting set is needed.

Stacking


In order to stack two plinths, two connecting sets are needed.

Maximum allowed height: 4 plinths x 100 mm

Product description	Package	Catalogue number
4 bolts M10x20 4 washers 10,5 4 flange nuts M10	1 set	WZ-6935-Z1-03-000



Set of elements for connecting plinths

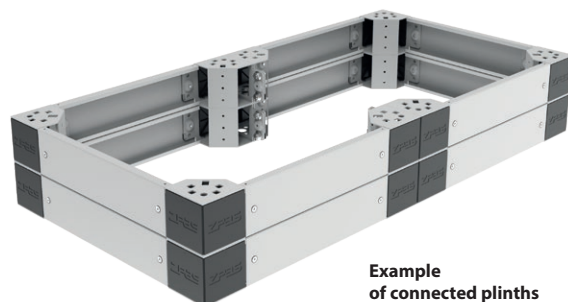

Example of connected plinths

BASE

Accessories for cabinets and open racks

DATA COMMUNICATION SOLUTIONS

ZPAS 061

ACCESSORIES FOR CABINETS AND OPEN RACKS

BASE



Levelling feet for cabinets and racks

Levelling feet

Levelling feet for cabinets and racks.

Thread: M12x38

Ways of adjustment:

- with 19 mm open ended spanner,
- with 5 mm wrench spanner (imbus).

Material

Adjustable screw – zinc-coated steel.

Base - plastic.

Scope of delivery

Adjustable feet with lock nuts

- set of 4 pcs.

Package	Catalogue number
1 set = 4 pcs	WZ-5571-42-00-000



Locking castor 150



Non-locking castor 150

Castors 150

For cabinets **SZB IT**, as well as for open racks **SRD** and **SRX**.

One cabinet or open rack requires 2 locking and 2 non-locking castors.

Maximum load capacity of 4 castors: 400 kg*

Scope of delivery

Set of 2 castors (locking or non-locking type) with screws and washers for fixing into the cabinet or rack.

Product name	Package	Catalogue number
Locking castor 150	1 set = 2 pcs	WZ-SB72-00-01-000-2
Non-locking castor 150	1 set = 2 pcs	WZ-SB72-00-02-000-2

* Applicable to castors only. Loading capacity of the cabinet (or open rack) is specified in the description.

ACCESSORIES FOR CABINETS AND OPEN RACKS

BASE

Castors 300

For cabinets: **SZB IT, DSR IT, SZE2 PC.**

One cabinet requires 2 locking, 2 non-locking castors and 2 strengthening bars. One bar with locking castors is fixed at the cabinet's front, and the other bar with non-locking castors at the rear.

Maximum load capacity of 4 castors: 600 kg*

Surface finishing

Strengthening bar for castors powder painted in light grey (RAL 7035).

Scope of delivery

These are available in sets:

- 2 castors (locking or non-locking type) with screws and washers for fixing into the strengthening bar,
- 2 strengthening bars for castors with screws and washers for fixing into the bottom plate of the cabinet.

Product name	Package	Catalogue number
Locking castors 300 steering type	2 pcs	WZ-SB73-00-01-000-2
Non-locking castors 300 fixed type	2 pcs	WZ-SB73-00-02-000-2
Strengthening bars 600 mm	2 pcs	WZ-SB74-00-01-011-2
for cabinet's width 800 mm	2 pcs	WZ-SB74-00-02-011-2

* Applicable to castors only. Loading capacity of the cabinet is specified in the description.




Locking castor 300 steering type



Non-locking castor 300 fixed type



Strengthening bar for castors 300

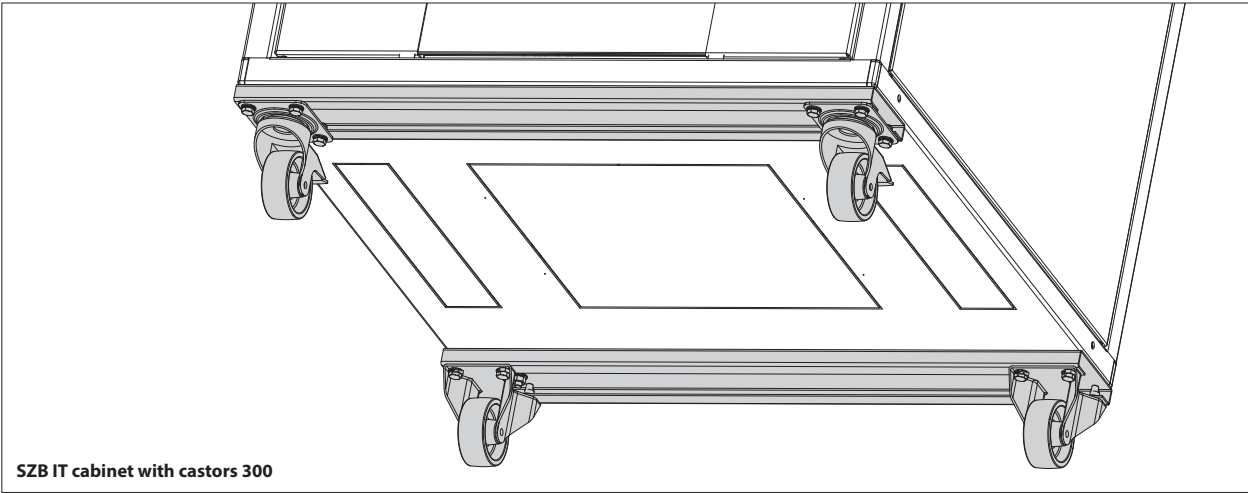

SZB IT cabinet with castors 300

ACCESSORIES FOR CABINETS AND OPEN RACKS

SHELVES



Fixed shelf II/2U



Pull out shelf II/2U



Fixed shelf II/1U

Shelves fixed on two mounting profiles - 19" assembly

Available in fixed and pull-out version.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).


Scope of delivery

Fixed or pull out shelf with fixing accessories.

Product name	Usable dimensions			Load capacity* [kg]	Catalogue number	
	Height [U = 44.45 mm]	Width [mm]	Depth [mm]		RAL 7035	RAL 9005
Fixed shelf II/2U	2 U	446	250	25	WZ-SB00-49-05-011	WZ-SB00-49-05-161
			350	25	WZ-SB00-49-04-011	WZ-SB00-49-04-161
			450	25	WZ-SB00-49-03-011	WZ-SB00-49-03-161
			650	25	WZ-SB00-49-01-011	WZ-SB00-49-01-161
Pull out shelf II/2U	2 U	416	355	20	WZ-5841-14-04-011	WZ-5841-14-04-161
			455	20	WZ-5841-14-02-011	WZ-5841-14-02-161
			555	20	WZ-5841-14-01-011	WZ-5841-14-01-161
Fixed shelf II/1U	1 U	446	250	6	WZ-5714-53-00-011	WZ-5714-53-00-161
			350	10	WZ-5714-52-00-011	WZ-5714-52-00-161

Package: 1 pc.

* static load, evenly distributed over the entire surface

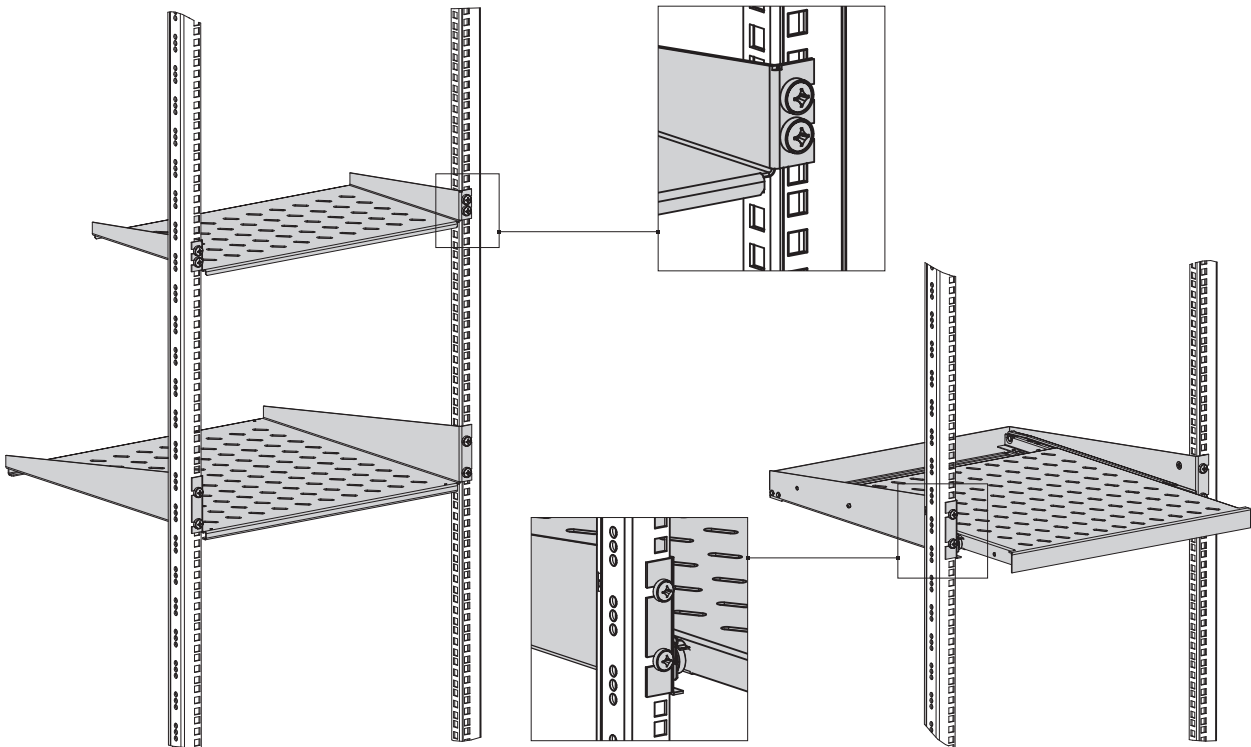

ACCESSORIES FOR CABINETS AND OPEN RACKS

SHELVES

Shelves fixed on four mounting profiles**- 19" assembly, adjustable length of the rear mounting brackets**

Available in fixed and pull-out version.

Fixed on two pairs of 19" mounting profiles.

Material


Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005), anti-dust brushes and cable clamps made of plastic.

Scope of delivery


Fixed or pull out shelf with fixing accessories.



Fixed shelf IS/0.5U



Fixed shelf ISU/1U with cable clamps and brush cable entries



Pull-out shelf IR/1U





Product name	Dimensions [mm]				Fo cabinet depth** [mm]	Load capacity*** [kg]	Catalogue number	
	H	W	D	D1			RAL 7035	RAL 9005
Fixed shelf IS/0.5U	22 (0.5 U)	450	350*	350-450	600	70	WZ-8264-80-02-350-011	WZ-8264-80-02-350-161
			450	450-550			WZ-8264-80-03-450-011	WZ-8264-80-03-450-161
			550*	550-650	800		WZ-8264-80-04-550-011	WZ-8264-80-04-550-161
			650	650-750			WZ-8264-80-05-650-011	WZ-8264-80-05-650-161
Fixed shelf ISU/1U with cable clamps and brush cable entries	44 (1 U)	450	350*	350-450	600	120	WZ-5841-20-02-350-011	WZ-5841-20-02-350-161
			450	450-550			WZ-5841-20-03-450-011	WZ-5841-20-03-450-161
			550*	550-650	800		WZ-5841-20-04-550-011	WZ-5841-20-04-550-161
			650	650-750			WZ-5841-20-05-650-011	WZ-5841-20-05-650-161
			750*	750-850	1000		WZ-5841-20-06-750-011	WZ-5841-20-06-750-161
			850	850-950			WZ-5841-20-07-850-011	WZ-5841-20-07-850-161
Pull-out shelf IR/1U	44 (1 U)	414	305*	350-450	600	30	WZ-5841-25-01-350-011	WZ-5841-25-01-350-161
			405	450-550			WZ-5841-25-02-450-011	WZ-5841-25-02-450-161
			505*	550-650	800		WZ-5841-25-03-550-011	WZ-5841-25-03-550-161
			605	650-750			WZ-5841-25-04-650-011	WZ-5841-25-04-650-161

Package: 1 pc.

* dedicated for ZPAS cabinets with original position of mounting profiles

** minimum depth of the cabinet to which the shelf can be mounted

*** static load, evenly distributed over the entire surface

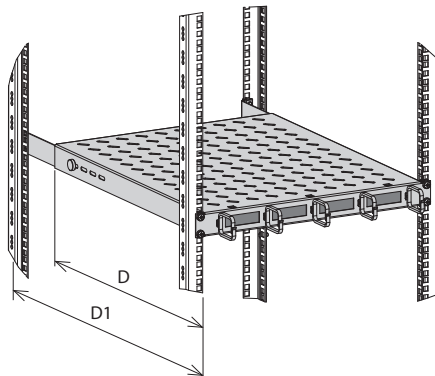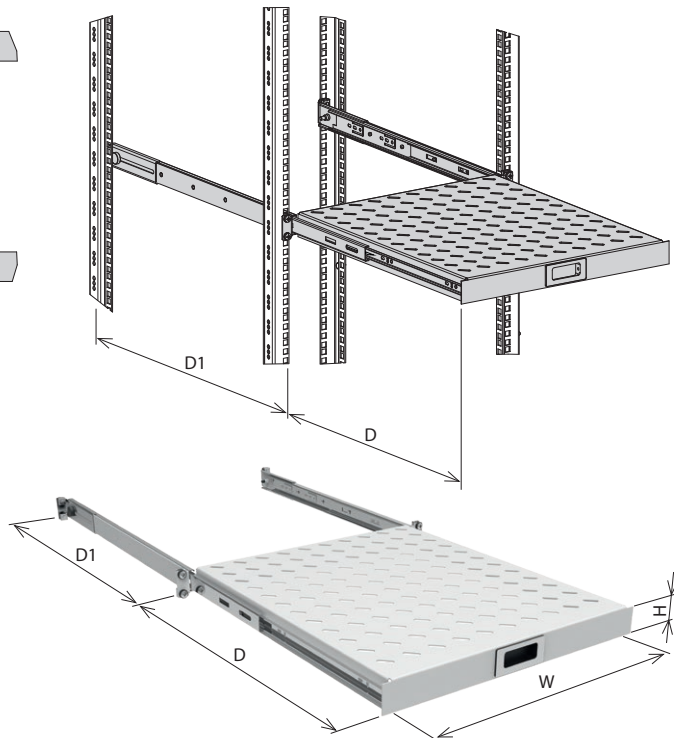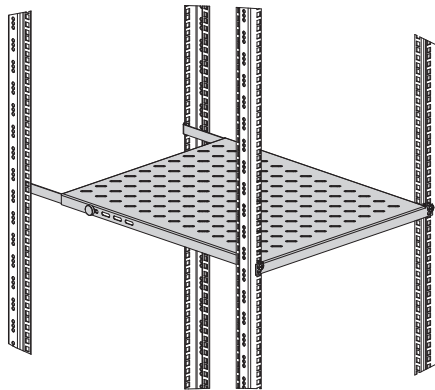

ACCESSORIES FOR CABINETS AND OPEN RACKS

SHELVES



Shelf with adjustable depth
1 U, 500-900 mm



Shelf with adjustable depth
1 U, 350-600 mm

**Shelves fixed on four mounting profiles
- 19" assembly, adjustable depth**

Fixed on two pairs of 19" mounting profiles or mounting angles.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).


Scope of delivery

Shelf with fixing accessories.

Product name	Usable dimensions			Load capacity* [kg]	Catalogue number	
	Height [U = 44.45 mm]	Width [mm]	Depth [mm]		RAL 7035	RAL 9005
Shelf with adjustable depth	1 U (44 mm)	440	350-600	150	WZ-3074-83-04-011	WZ-3074-83-04-161
	1 U (44 mm)	440	500-900	150	WZ-3074-83-00-011	WZ-3074-83-00-161

Package: 1 pc.

* static load, evenly distributed over the entire surface

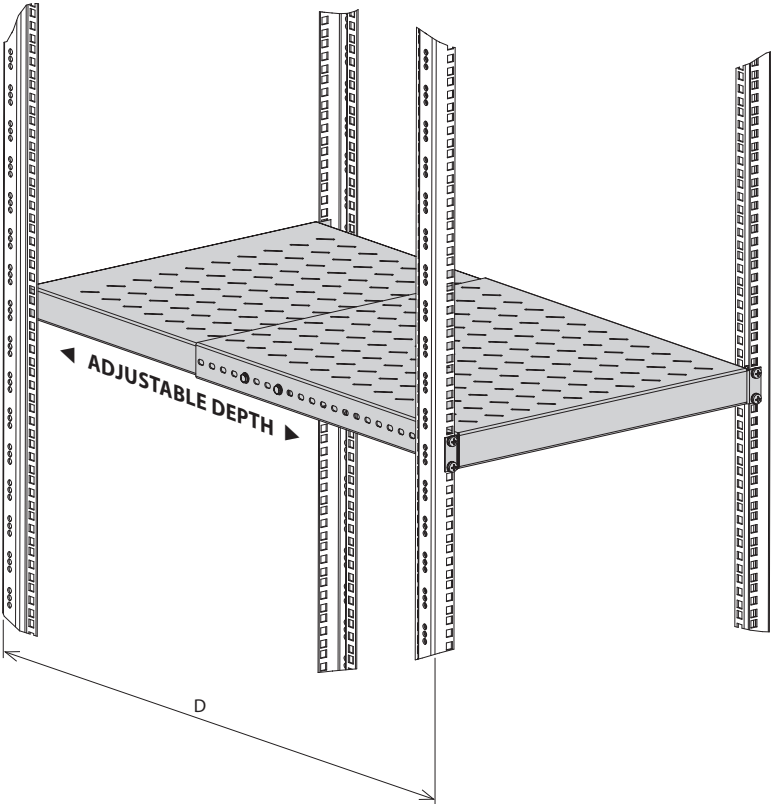

ACCESSORIES FOR CABINETS AND OPEN RACKS

SHELVES

Shelves fixed on six 19" mounting profiles
- fixing to the side openings

For cabinets 1000 and 1200 mm deep (SZB IT, DSR IT, Z-SERVER).
Available in fixed and telescopic versions.
Assembling on three pairs of 19" mounting profiles (fastening to side openings).

Material
Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery
Fixed or telescopic shelf with fixing accessories.




High-load fixed shelf



High-load telescopic shelf


Product name	Usable dimensions			Load capacity* [kg]	Catalogue number	
	Height [mm]	Width [mm]	Depth [mm]		RAL 7035	RAL 9005
High-load fixed shelf	38	483	700	200	WZ-5841-06-00-011	WZ-5841-06-00-161
High-load telescopic shelf	50 (shelf) 110 (fixing rails)	392	700	140	WZ-5841-08-00-011	WZ-5841-08-00-161

Package: 1 pc. * static load, evenly distributed over the entire surface

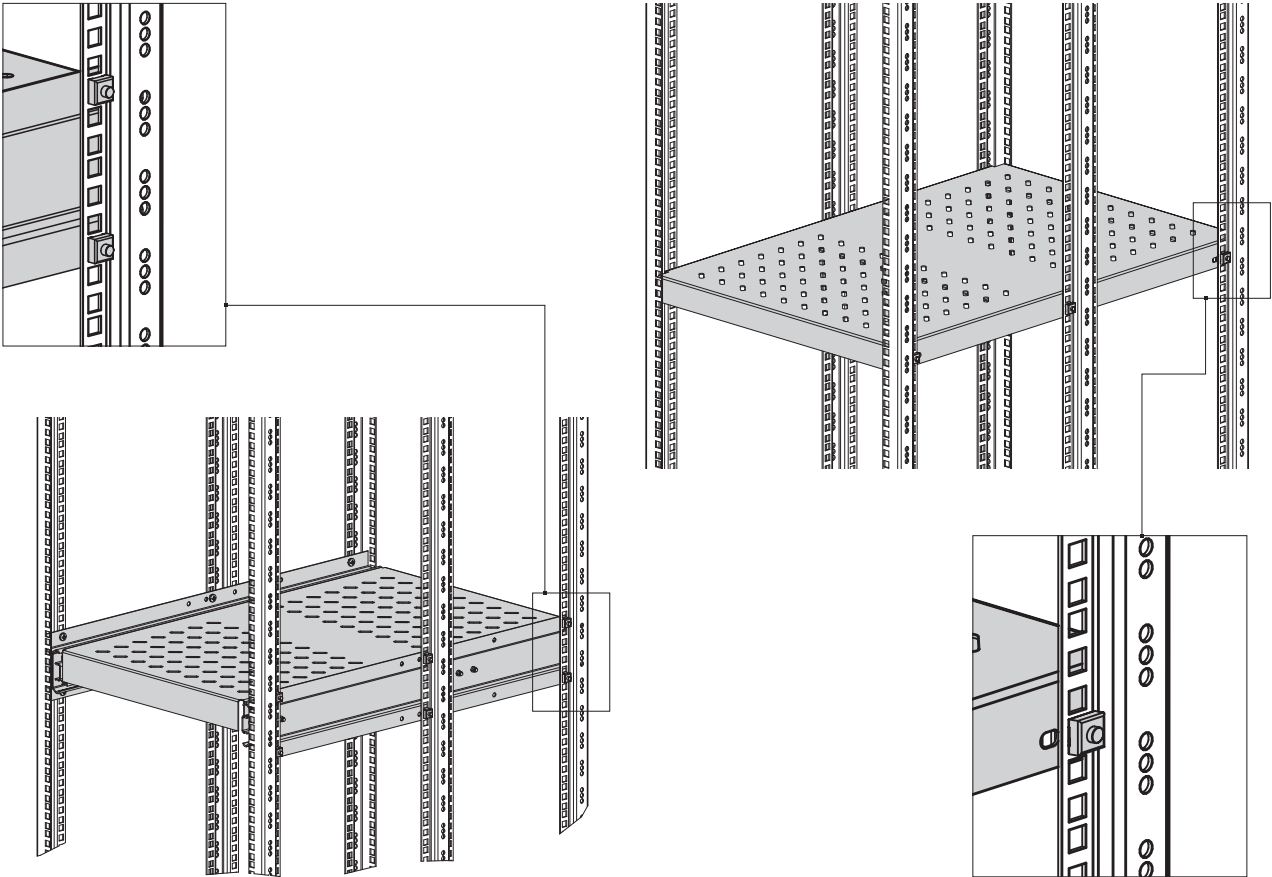


ACCESSORIES FOR CABINETS AND OPEN RACKS

19" FRAME AND FIXING ACCESSORIES

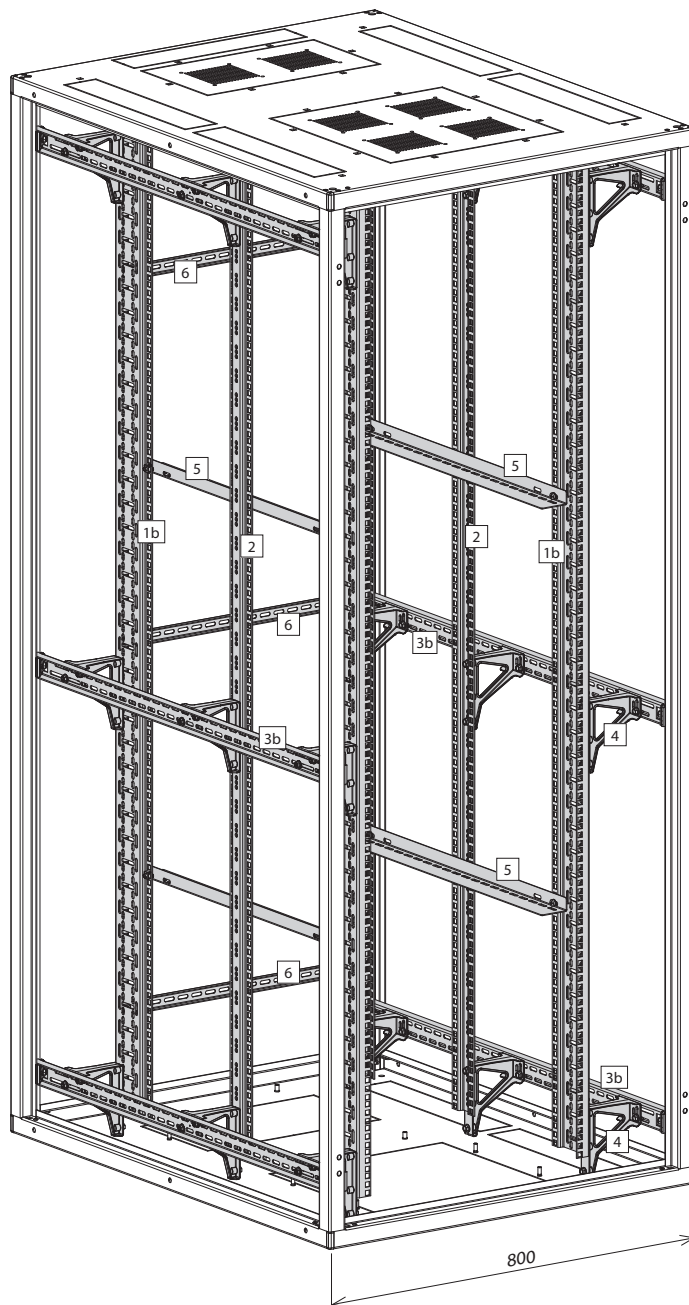

Elements of 19" rack frame

- 1a. 19" mounting profile (rack rail), type STANDARD, 15 mm deep
- 1b. 19" mounting profile (rack rail), type PREMIUM, 12 mm deep
- 2. Middle mounting profile, type STANDARD, 12 mm deep
- 3a. C-profile for 15 mm deep mounting profiles
- 3b. C-profile for 12 mm deep mounting profiles
- 4. Outrigger
- 5. Guide bar
- 6. Cross bar

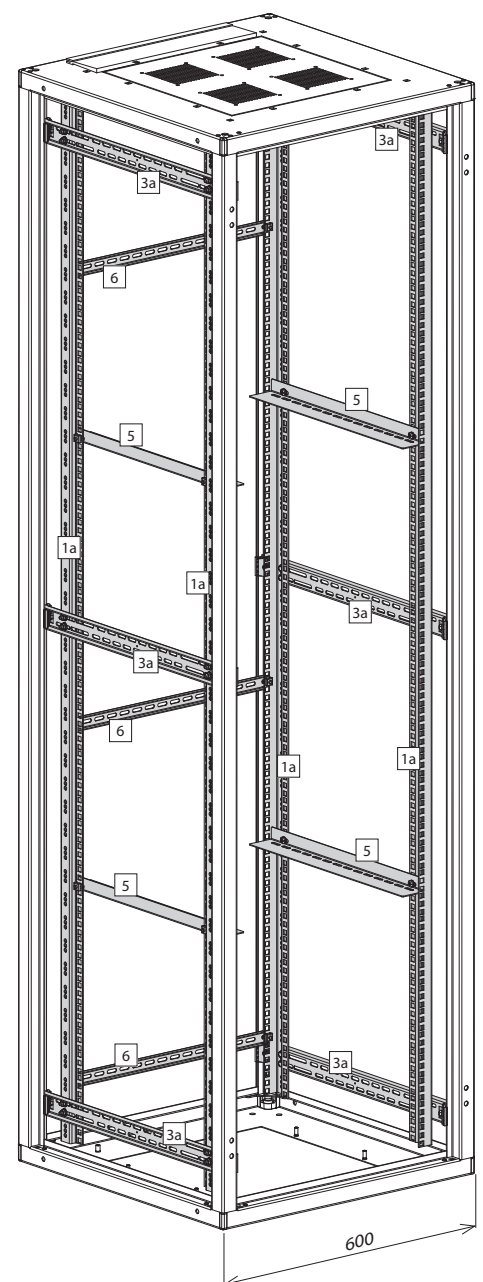

ACCESSORIES FOR CABINETS AND OPEN RACKS

19" FRAME AND FIXING ACCESSORIES

Mounting profiles

For installing 19" equipment in cabinets: **SZB IT**, **DSR IT**, **SZE2 PC**. In cabinets 600 mm wide, mounting profiles are fixed directly to the C-profiles; in cabinets 800 mm wide, in order to achieve 19" spacing, it is necessary to use outriggers.

Notes: Only 15 mm deep mounting profiles may be used in SZE2 PC cabinets.

Mounting profiles for wall-mounted cabinets are described on page 57.

Material

Al-Zn coated sheet steel.

Scope of delivery

Mounting bar or mounting angle without fixing accessories.
(Fixing accessories should be ordered separately.)

Height [U = 44.45 mm]	Catalogue number			
	19" mounting profile type STANDARD, 15 mm deep	Middle mounting profile type STANDARD, 15 mm deep	19" mounting profile type PREMIUM, 12 mm deep	Middle mounting profile type STANDARD, 12 mm deep
18 U	WZ-1718-97-09-000	WZ-1718-98-09-000	WZ-7209-02-09-000	WZ-7782-02-19-000
24 U	WZ-1718-97-08-000	WZ-1718-98-08-000	WZ-7209-02-08-000	WZ-7782-02-15-000
33 U	WZ-1718-97-14-000	WZ-1718-98-15-000	WZ-7209-02-14-000	WZ-7782-02-09-000
38 U	WZ-1718-97-04-000	WZ-1718-98-04-000	WZ-7209-02-04-000	WZ-7782-02-07-000
42 U	WZ-1718-97-02-000	WZ-1718-98-02-000	WZ-7209-02-02-000	WZ-7782-02-04-000
45 U	WZ-1718-97-01-000	WZ-1718-98-01-000	WZ-7209-02-01-000	WZ-7782-02-03-000
47 U	WZ-1718-97-20-000	WZ-1718-98-13-000	WZ-7209-02-20-000	WZ-7782-02-02-000

Package: 1 pc.

C-profiles

For fixing mounting profiles, mounting angles, cable ducts and cable trays in **SZB IT** and **DSR IT** cabinets.

Available in two versions with different depths:

- 18 mm deep C-profiles for fixing mounting profiles with a depth of 15 mm,
- 21 mm deep C-profiles for fixing mounting profiles with a depth of 12 mm.

Material

Al-Zn coated sheet steel.

Scope of delivery

Set of 2 C-profiles with fixing accessories for assembling into the cabinet.

For cabinet depth [mm]	Catalogue number	
	C-profiles for 15 mm deep mounting profiles	C-profiles for 12 mm deep mounting profiles
600	WZ-5507-16-01-000	WZ-7782-06-06-000
800	WZ-5507-16-02-000	WZ-7782-06-05-000
1000	WZ-5507-16-03-000	WZ-7782-06-03-000
1200	WZ-5507-16-08-000	WZ-7782-06-01-000

Package: 2 pcs



ACCESSORIES FOR CABINETS AND OPEN RACKS

19" FRAME AND FIXING ACCESSORIES

**Outrigger**

For fixing mounting profiles in **800 mm** wide **SZB IT**, **DSR IT** and **SZE2 PC** cabinets, in order to achieve 19" spacing.

Depending on the cabinet design, two or three outriggers are required for assembling one mounting profile.

Material

zamak casting

Scope of delivery

One outrigger with fixing accessories to install the outrigger to mounting profile/angle and to C-profile.

Package	Catalogue number
1 pc.	WZ-5205-90-00-C12




Elements for fixing one mounting profile to 600 mm wide **SZB IT**, **DSR IT** or **SZE2 PC** cabinet (without outrigger)



Elements for fixing appliances to the mounting profiles

Fixing accessories

Set description	Package	Catalogue number
Elements for fixing one mounting profile to 600 mm wide SZB IT , DSR IT or SZE2 PC cabinet (without outrigger): Flange bolt M6x12 - 3 pcs Flange nut M6 - 3 pcs	1 set	WZ-8059-Z1-01-000
Elements for fixing appliances to the mounting profiles: Screw M6x16 - 10 pcs. Cage nut M6 - 10 pcs. Plastic washer - 10 pcs.	1 set	T1Z-00-0002

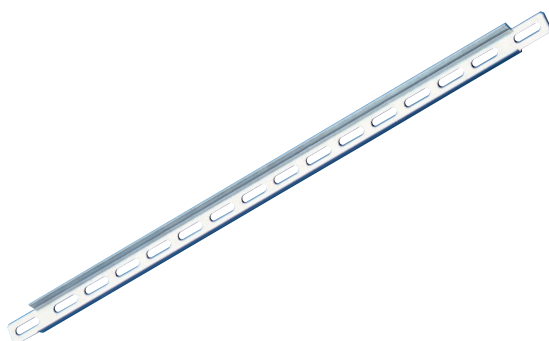**19" cross bar**

Fixed to the rear mounting profiles in 19" cabinets.
For installing cables or supporting appliances in the cabinet.
With holes for M6 bolts.

Material

Zinc-coated sheet steel

Scope of delivery

Cross bar with fixing accessories.

Length [mm]	Package	Catalogue number
500	1 pc.	WZ-SB00-28-01-000

ACCESSORIES FOR CABINETS AND OPEN RACKS

19" FRAME AND FIXING ACCESSORIES

Guide bar

Fixed horizontally to the front and rear 19" mounting profiles, parallel to the cabinet's side.
For supporting appliances in the cabinet.
With oblong holes measuring 6.5 x 22 mm.

Material


Zinc-coated sheet steel.

Scope of delivery

Guide bar with fixing accessories.

Length L [mm]	Catalogue number
250	WZ-SB00-27-05-000
350	WZ-SB00-27-04-000
450	WZ-SB00-27-03-000
550	WZ-SB00-27-02-000
650	WZ-SB00-27-01-000

Package: 1 pc.

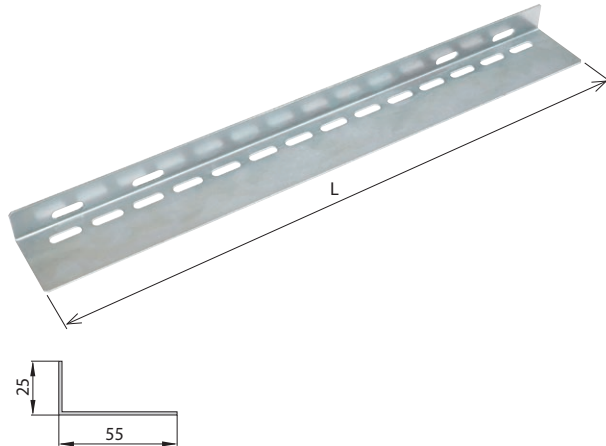**Adjustable guides**

Fixed horizontally to the front and rear 19" mounting profiles, parallel to the cabinet's side.
For supporting appliances in the cabinet.
With oblong holes measuring 12.5 x 25 mm.

Material



AL-Zn-coated sheet steel.

Scope of delivery

Set of two adjustable guides with fixing accessories for mounting in the cabinet.

Length L [mm]	Catalogue number
350-600	WZ-8672-20-01-000
550-900	WZ-8672-20-02-000
850-1150	WZ-8672-20-03-000


Package: 1 set

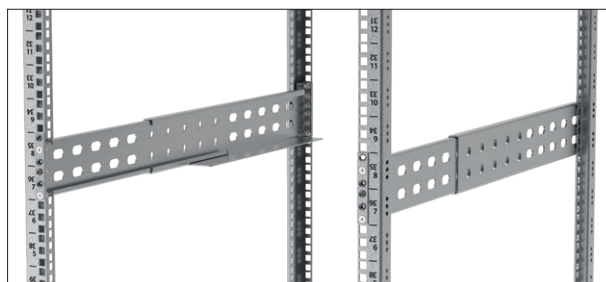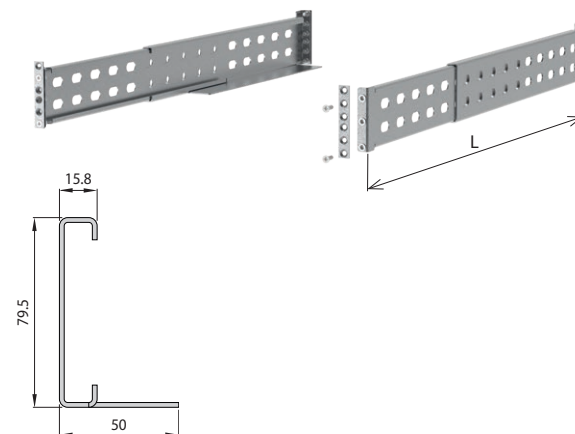

Adjustable guides fixed on 19" mounting profiles

ACCESSORIES FOR CABINETS AND OPEN RACKS

BAYING CABINETS IN ROWS • LIGHTING • POCKETS

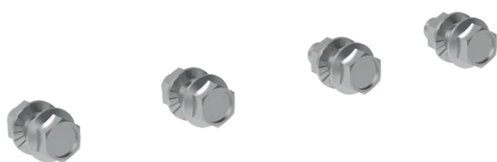**Elements for baying cabinets in rows**

Sets of elements for baying **SZB IT** or **DSR IT** cabinets.

One set is intended for baying two cabinets.

The cabinets are connected by means of holes in the sides of the bottom and top plates.

In the case of cabinets with high load, a set including clamp connectors is recommended - see page 39.

Set contents	Package	Catalogue number
Flange bolt M8 - 4 pcs Flange nut M8 - 4 pcs	1 set	WZ-2565-13-03-000



Lighting kit with fixing bracket in light grey (RAL 7035) colour

Lighting kit

For floor-standing and wall-mounted cabinets.

19" assembly, usable height 1 U.

Material of mounting bracket

Sheet steel, powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery


Electric light fitting with a LED lamp 230 V, 5 W and a switch, a bracket for fixing the electric light fitting on the 19" mounting profiles, power cord, fixing accessories.

Power cord with a door switch is ordered separately.



Power cord with a door switch for SZB IT and DSR IT cabinets

Product name	Package	Colour	Catalogue number
Lighting kit	1 set	RAL 7035	WN-0208-05-01-011-02
		RAL 9005	WN-0208-05-01-161-02
Power cord with a door switch for SZB IT and DSR IT cabinets	1 set	—	WN-0208-04-05-000

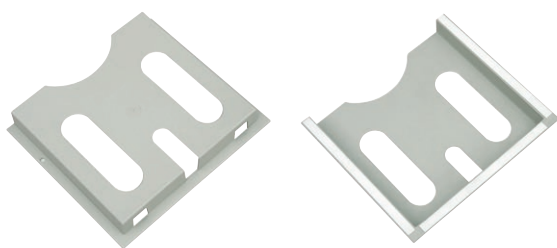**Document pocket**

For fixing on the cabinet's door.

A4 size, light grey (RAL 7035) colour.

Material

Plastic

Scope of delivery

Pocket with self-adhesive fixing tape.

Package	Colour	Catalogue number
1 pc.	RAL 7035	WZ-SB00-40-00-011

ACCESSORIES FOR CABINETS AND OPEN RACKS

EARTHING ELEMENTS

Earthing conductor set

Insulated copper conductors for joining removable elements of the cabinet with earthing bar.
Equipped with contact eyes Ø 6 mm.


Material

Copper conductor, cross-section 6 mm².

Scope of delivery

Earthing conductors are sold in sets in accordance with the chart below.

Description of set	Package	Catalogue number
Conductor 300 mm long - 4 pcs. Conductor 400 mm long - 2 pcs. Conductor 600 mm long - 1 pc. Fixing accessories	1 set	WZ-SB12-00-01-000
Conductor 300 mm long - 2 pcs. Conductor 400 mm long - 2 pcs. Conductor 600 mm long - 1 pc. Fixing accessories	1 set	WZ-SB12-00-02-000

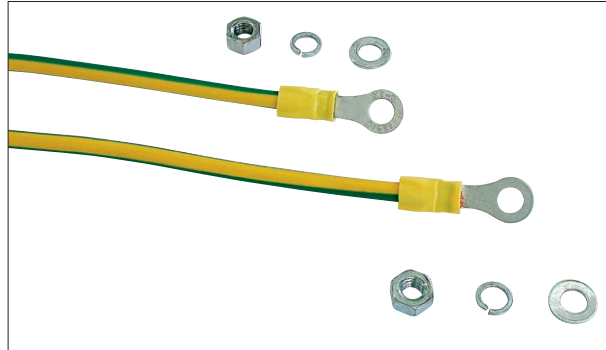**Copper earthing bar**

For **SZB IT** or **DSR IT** cabinets, as an alternative for the factory-installed galvanized steel earthing bar.

Material

Copper.

Scope of delivery


Earthing bar with bolts for assembling in the cabinet.

Product name	Package	Catalogue number
Earthing bar Cu 15x5x375 mm	1 pc.	WZ-3393-11-00-000




ACCESSORIES FOR CABINETS AND OPEN RACKS

ROOF

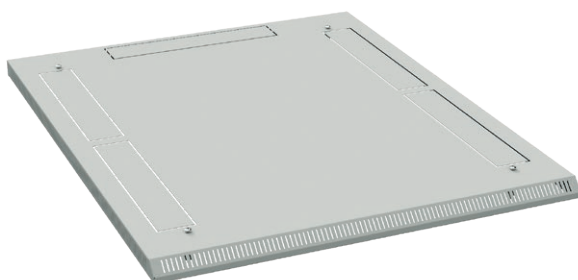

Roof for SZB IT cabinet 800 x 1000 mm

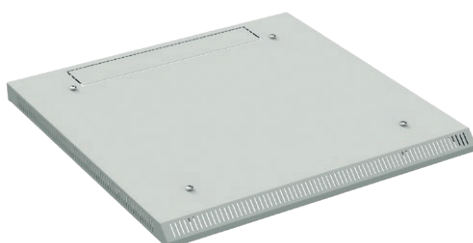

Roof for SZB IT cabinet 600 x 600 mm

Roof for SZB IT cabinet

It improves the aesthetics of the cabinet and protects the ventilation openings in the top plate of the cabinet. Increases the total height of the cabinet by 40 mm.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Roof with fixing accessories.

For SZB IT cabinet		Catalogue number	
width [mm]	depth [mm]	RAL 7035	RAL 9005
600	600	WZ-8059-50-6060-011	WZ-8059-50-6060-161
	800	WZ-8059-50-6080-011	WZ-8059-50-6080-161
	1000	WZ-8059-50-6010-011	WZ-8059-50-6010-161
	1200	WZ-8059-50-6012-011	WZ-8059-50-6012-161
800	600	WZ-8059-50-8060-011	WZ-8059-50-8060-161
	800	WZ-8059-50-8080-011	WZ-8059-50-8080-161
	1000	WZ-8059-50-8010-011	WZ-8059-50-8010-161
	1200	WZ-8059-50-8012-011	WZ-8059-50-8012-161

Package: 1 pc.



Roof with 4 fixing/spacer bolts for SZE2 PC cabinet

Roof for SZE2 PC cabinet

It improves the aesthetics of the cabinet and, in the case of a cabinet equipped with a roof fan unit, protects the ventilation openings in the top plate of the cabinet. Increases the total height of the cabinet by 41,5 mm.

Material

Sheet steel powder painted in light grey (RAL 7035).

Scope of delivery

Roof with 4 fixing/spacer bolts for mounting. (Assembly screws M12 are delivered with the cabinet.)

For SZE2 PC cabinet		Catalogue number
width [mm]	depth [mm]	
600	600	WZ-1951-27-12-011
	800	WZ-1951-27-11-011

Package: 1 pc.

ACCESSORIES FOR CABINETS AND OPEN RACKS

MASKING ITEMS

Blanking and cable entry plates and strips for bottom plate, top plate and roof

For cabinets: **Z-SERVER, SZB IT, DSR IT.**

Material


Sheet steel, powder painted in light grey (RAL 7035) or black (RAL 9005), plastic.

Scope of delivery


Blanking/cable entry plate or strip with fixing accessories.

Product name	For opening [mm]	Catalogue number	
		RAL 7035	RAL 9005
Solid blanking plate	380 x 380	WZ-1718-38-01-011	WZ-1718-38-01-161
	380 x 210	WZ-1718-38-02-011	WZ-1718-38-02-161
Perforated blanking plate	380 x 380	WZ-1718-39-01-011	WZ-1718-39-01-161
	380 x 210	WZ-1718-39-02-011	WZ-1718-39-02-161
Blanking plate with a fabric filter	380 x 380	WZ-1718-42-01-011	WZ-1718-42-01-161
	380 x 210	WZ-1718-42-02-011	WZ-1718-42-02-161
Cable entry plate with a brush strip	380 x 380	WZ-5271-10-00-011	WZ-5271-10-00-161
	380 x 210	WZ-5271-14-00-011	WZ-5271-14-00-161
Brush strip	380 x 71	WZ-8059-54-00-000	WZ-8059-54-00-000
Cable entry plate with a foam strip	380 x 380	WZ-1718-40-01-011	WZ-1718-40-01-161
	380 x 210	WZ-1718-40-02-011	WZ-1718-40-02-161
Cable entry plate with a fabric filter and a brush strip	380 x 380	WZ-SB76-00-00-011	WZ-SB76-00-00-161

Package: 1 pc.




Solid blanking plates




Perforated blanking plates





Blanking plates with a fabric filter



Cable entry plates with a brush strip



Brush strip



Cable entry plates with a foam strip



Cable entry plate with a fabric filter and a brush strip

ACCESSORIES FOR CABINETS AND OPEN RACKS

MASKING ITEMS



Blanking plates assembled with screws



Tool-free assembled blanking plate

19" blanking plates

For covering empty 19" space.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Blanking plate with fixing accessories.

Product name	Height [U = 44.45 mm]	Catalogue number	
		RAL 7035	RAL 9005
Blanking plate assembled with screws	1 U	WZ-SB00-33-01-011	WZ-SB00-33-01-161
	2 U	WZ-SB00-33-02-011	WZ-SB00-33-02-161
	3 U	WZ-SB00-33-03-011	WZ-SB00-33-03-161
	4 U	WZ-SB00-33-04-011	WZ-SB00-33-04-161
	5 U	WZ-SB00-33-05-011	WZ-SB00-33-05-161
	6 U	WZ-SB00-33-06-011	WZ-SB00-33-06-161
Tool-free assembled blanking plate	1 U	WZ-4687-75-01-011	WZ-4687-75-01-161

Package: 1 pc.

ACCESSORIES FOR CABINETS AND OPEN RACKS

MASKING ITEMS

Horizontal brush strips

The horizontal brushes are fitted on vertical masking panels under and over the working surface of the mounting profiles in **SZB IT** server cabinets. They are intended for limiting cold air circulation outside the working zone of the mounting profiles and preventing recirculation of hot air into the cold air inlet.

Material

Black plastic brush strip, steel holder powder painted in light grey (RAL 7035) or black (RAL 9005).


Scope of delivery

For 600 mm wide cabinets:

brush strip with holder and fixing accessories.

For 800 mm wide cabinets:

brush strip without holder and fixing accessories.

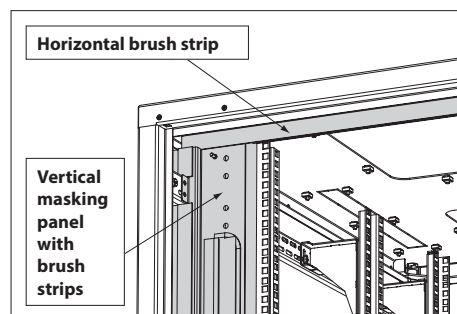

For cabinet width [mm]	Package	Catalogue number	
		RAL 7035	RAL 9005
600	1 pc.	WZ-5367-45-01-011	WZ-5367-45-01-161
800	1 pc.	WZ-5367-45-02-000	

Vertical masking panels with brush strips

The vertical masking panels are intended for sealing the space between the mounting profiles and the side panel in **SZB IT** server cabinets. They prevent hot air from being fed back into the cold air inlet.

AVAILABLE OPTIONS

For cabinets wide 800 mm:

1. Vertical masking panels with cable entries and openings for fixing cable clamps

2. Vertical solid masking panels with openings for fixing cable clamps

For cabinets wide 600 mm:

3. Vertical solid masking panels


The cable entries in masking panels for 800 mm cabinets are covered with a brush and their edges are protected with an edge seal. All three masking panels types are provided with a brush that, once assembled to the cabinet, fits tight to the side wall.

Material

Sheet steel powder painted, plastic.

Scope of delivery

A set of 2 vertical masking panels of a given type with fixing accessories.


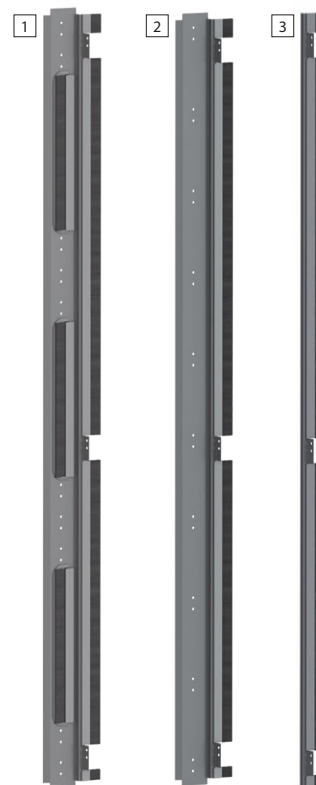


Height [U = 44.45 mm]	Catalogue number					
	For cabinets wide 800 mm				For cabinets wide 600 mm	
	1. Vertical masking panels with cable entries and openings for fixing cable clamps		2. Vertical solid masking panels with openings for fixing cable clamps		3. Vertical solid masking panels	
	RAL 7035	RAL 9005	RAL 7035	RAL 9005	RAL 7035	RAL 9005
42 U	WZ-5367-30-03-011	WZ-5367-30-03-161	WZ-5367-31-03-011	WZ-5367-31-03-161	WZ-5367-32-03-011	WZ-5367-32-03-161
45 U	WZ-5367-30-02-011	WZ-5367-30-02-161	WZ-5367-31-02-011	WZ-5367-31-02-161	WZ-5367-32-02-011	WZ-5367-32-02-161
47 U	WZ-5367-30-01-011	WZ-5367-30-01-161	WZ-5367-31-01-011	WZ-5367-31-01-161	WZ-5367-32-01-011	WZ-5367-32-01-161

Package: 1 set = 2 pcs


ACCESSORIES FOR CABINETS AND OPEN RACKS

CABLE MANAGEMENT

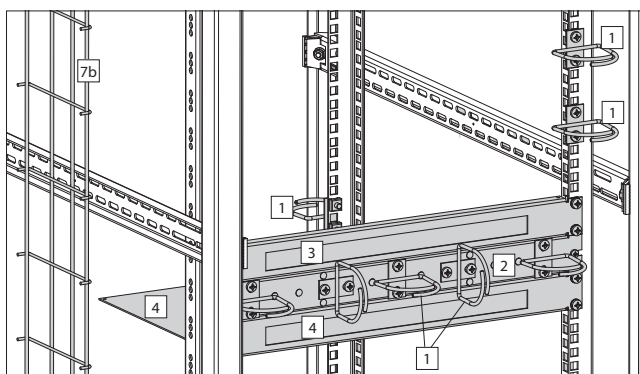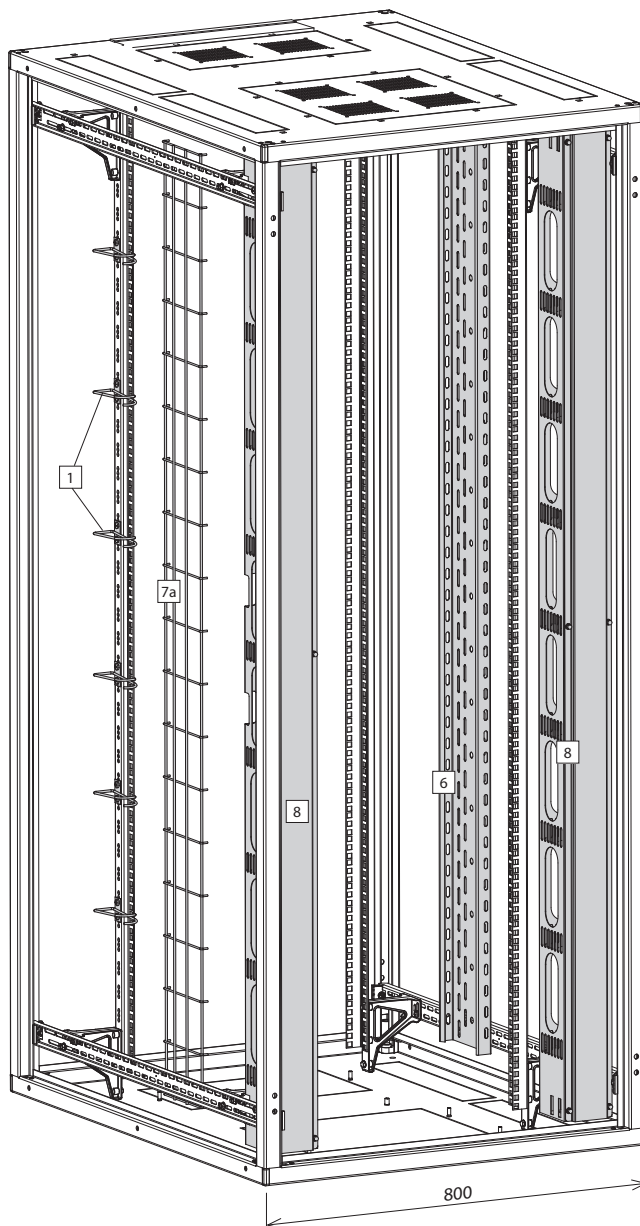

Cable management elements

1. Cable clamps
2. Cable management bar
3. Brush panel without support plate
4. Brush panel with support plate
5. Cable holder
6. Perforated cable tray, 30 mm deep
7. Wire cable tray, 15 mm deep
 - 7a - installation on the inside
 - 7b - installation on the outside
8. Vertical cable management

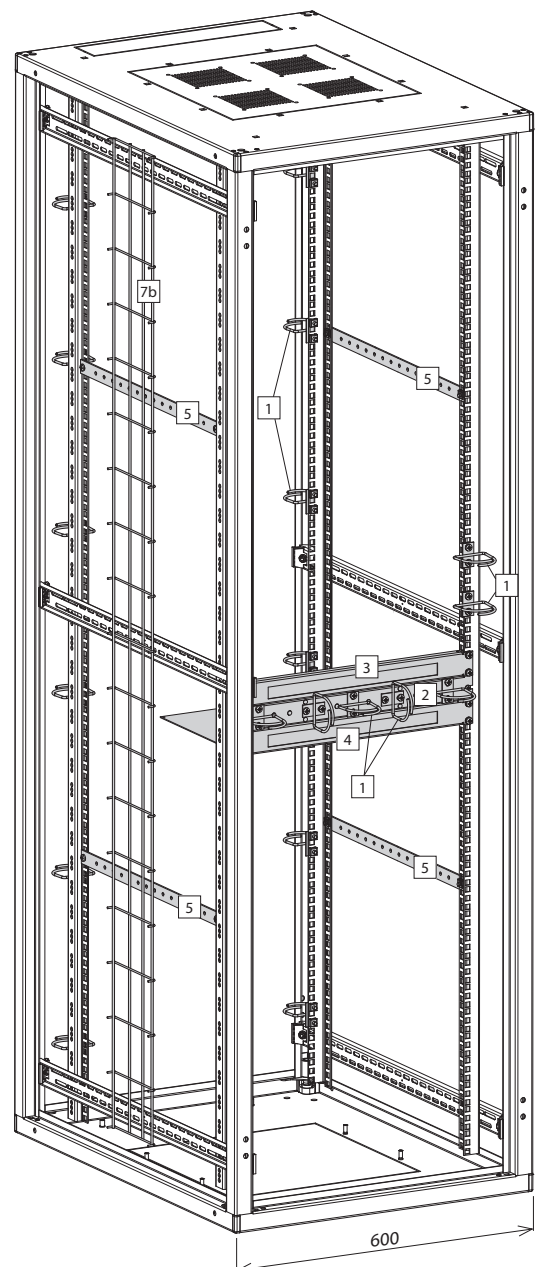

ACCESSORIES FOR CABINETS AND OPEN RACKS

CABLE MANAGEMENT

Cable clamps**Intended for fixing**

- on cable management bars,
- on mounting profiles.

Material

Zn coated steel.

Scope of delivery

The cable clamps are sold in sets: 5 pcs of clamps and fixing accessories.



Note:

It is possible to order on demand cable clamps painted in black (RAL 9005).



Way of fastening cable clamps on cable management bar

Type of cable clamp	Package	Dimensions A x B [mm]	Catalogue number
	5 pcs	88 x 88	WZ-SB52-00-01-000
		66 x 88	WZ-SB52-00-02-000
		66 x 66	WZ-SB52-00-03-000
		44 x 110	WZ-SB52-00-04-000
		44 x 88	WZ-SB52-00-05-000
		44 x 66	WZ-SB52-00-06-000
		44 x 44	WZ-SB52-00-07-000
	5 pcs	88 x 88	WZ-SB53-00-01-000
		66 x 88	WZ-SB53-00-02-000
		66 x 66	WZ-SB53-00-03-000
		44 x 110	WZ-SB53-00-04-000
		44 x 88	WZ-SB53-00-05-000
		44 x 66	WZ-SB53-00-06-000
		44 x 44	WZ-SB53-00-07-000
	5 pcs	88 x 88	WZ-SB54-00-01-000
		66 x 88	WZ-SB54-00-02-000
		66 x 66	WZ-SB54-00-03-000
		44 x 110	WZ-SB54-00-04-000
		44 x 88	WZ-SB54-00-05-000
		44 x 66	WZ-SB54-00-06-000
		44 x 44	WZ-SB54-00-07-000

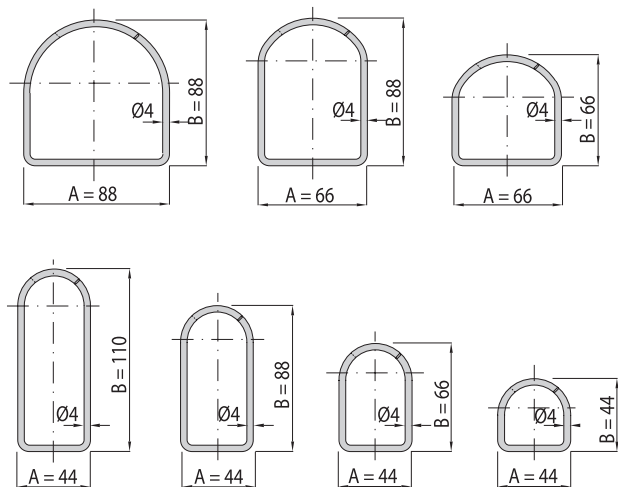

Mounting plate:

Cable management bar

19" assembly, height: 1 U.

With slots for mounting cable clamps.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Cable management bar,
8 rubber covers for not used slots,
fixing accessories.

Note:

Cable clamps should be ordered separately.



Cable management bar

Height [U = 44.45 mm]	Package	Colour	Catalogue number
1 U	1 pc.	RAL 7035	WZ-SB55-00-00-011
		RAL 9005	WZ-SB55-00-00-161

ACCESSORIES FOR CABINETS AND OPEN RACKS


CABLE MANAGEMENT



T-SO-900-614



T-SO-900-615

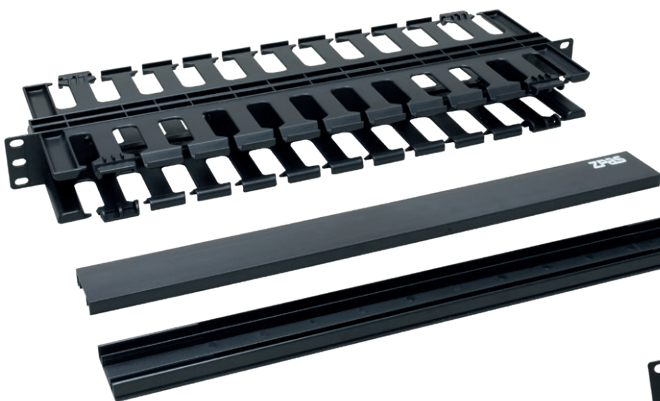

T-SO-900-618

Cable management panels, finger type

Designed for horizontal cable organization inside the 19" cabinets.
Available in 1 U and 2 U heights.
Two slots for cable entry in the back side.
Removable front cover.

Material


Plastic in black or sheet steel powder painted in black.

Scope of delivery


Cable management panel without fixing accessories.

External dimensions [mm]			Upper and lower slots		Material	Catalogue number
Width	Height	Depth	Number	Width [mm]		
483	44 (1 U)	87	12	15	plastic	T-SO-900-614
483	88 (2 U)	87	12	15	plastic	T-SO-900-615
483	44 (1 U)	174	12 + 12	15	plastic	T-SO-900-618
483	44 (1 U)	71	12	10	metal	T-SO-900-613
483	44 (1 U)	48	24	6	metal	T-SO-900-616

Package: 1 pc.

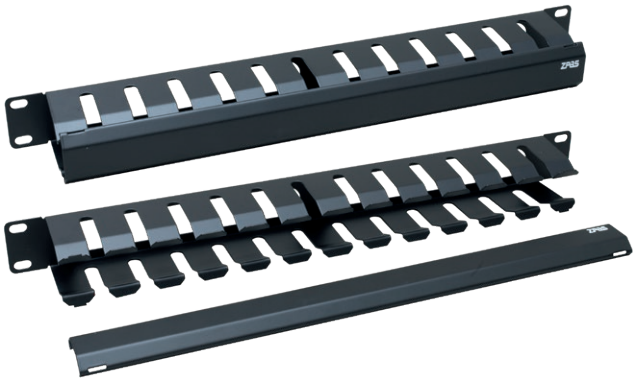

T-SO-900-613

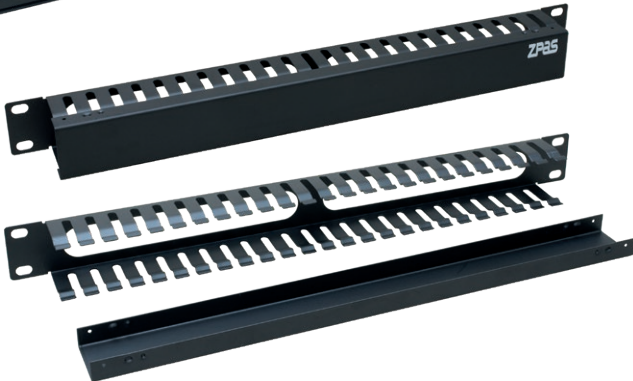

T-SO-900-616

ACCESSORIES FOR CABINETS AND OPEN RACKS

CABLE MANAGEMENT

Cable management panels with clamps

Designed for horizontal cable organization inside the 19" cabinets.

Height 1 U.

T-SO-900-008 panel includes four brush cable entries.

Material


Sheet steel panel powder painted in black (RAL 9005) or light grey (RAL 7035) - see photos, plastic cable clamps in black, plastic brush (in the T-SO-900-008 panel).

Scope of delivery

Cable management panel without fixing accessories.

External dimensions [mm]			Number of clamps	Catalogue number
Width	Height	Depth		
483	44 (1 U)	90	5	T-SO-900-617
483	44 (1 U)	75	5	T-SO-900-008
483	44 (1 U)	80	9	WNK-811-000

Package: 1 pc.

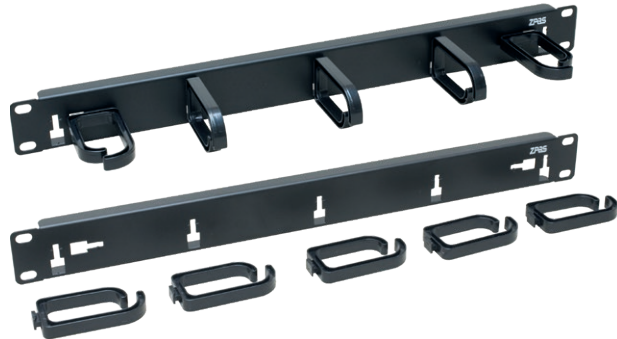

T-SO-900-617



T-SO-900-008



WNK-811-000

Cable holder

Fixed horizontally to the front and rear mounting profiles, parallel to the cabinet's side. For installing cable bundle. With holes for M6 bolts.

Material

Zinc-coated sheet steel

Scope of delivery

Cable holder with fixing accessories.

Length [mm]	Catalogue number
210	WZ-SB00-29-05-000
310	WZ-SB00-29-04-000
335	WZ-SB00-29-03-000
410	WZ-SB00-29-02-000
500	WZ-SB00-29-01-000


Package: 1 pc.



Cable holder

ACCESSORIES FOR CABINETS AND OPEN RACKS

CABLE MANAGEMENT

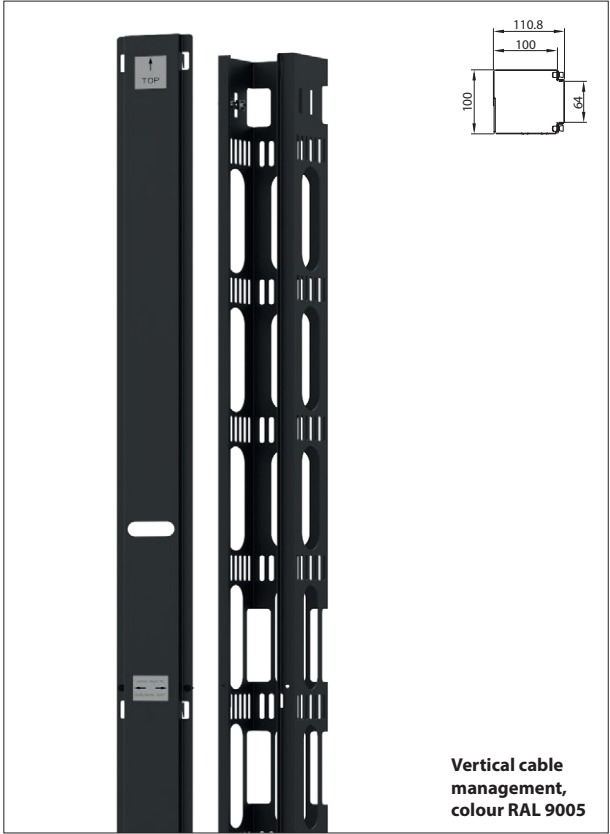

Vertical cable management

Designed for vertical organization of cables inside the **800 mm** wide **SZB IT** cabinets. Fixed to horizontal C-profiles at the cabinet's side walls. Equipped with a removable front cover.

Material

Sheet steel powder painted in black (RAL 9005).

Scope of delivery

Vertical cable management with fixing accessories for assembling into the cabinet.

For cabinet height	Dimensions [mm]		Colour	Catalogue number
	Width	Depth		
42 U	100	111	RAL 7035	WZ-6186-22-03-011
			RAL 9005	WZ-6186-22-03-161
45 U	100	111	RAL 7035	WZ-6186-22-02-011
			RAL 9005	WZ-6186-22-02-161
47 U	100	111	RAL 7035	WZ-6186-22-01-011
			RAL 9005	WZ-6186-22-01-161

Package: 1 pc.



Brush panel without support plate



Brush panel with support plate

Brush panels

Make easier to organise cables in data cabinets. 19" assembly, height 1 U.

With 341 x 21.5 mm brush opening. Support plate can be used in order to keep patch cords which are in excess.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

Brush panel with fixing accessories for assembling into the 19" mounting profiles.

Panel type	Depth [mm]	Package	Colour	Catalogue number
Without support plate	50	1 pc.	RAL 7035	WZ-SB63-00-01-011
			RAL 9005	WZ-SB63-00-01-161
With support plate	300	1 pc.	RAL 7035	WZ-SB63-00-02-011
			RAL 9005	WZ-SB63-00-02-161

ACCESSORIES FOR CABINETS AND OPEN RACKS

CABLE MANAGEMENT

Perforated cable tray

Designed for vertical cable management inside the cabinet.
Fixed to horizontal C-profiles at the cabinet's side walls.
Width 150 mm, depth 30 mm.

Note: In 600 mm wide **SZB IT** cabinets, 30 mm deep cable tray can be fitted to the C-profiles only from the inner side (it does not fit in the space between the C-profile and cabinet's side panel.).

Material


Sheet steel zinc coated.

Scope of delivery

Cable tray with fixing accessories.

Cable tray length [mm]	For cabinet height [U = 44.45 mm]	Catalogue number
1100	24 U	WZ-4755-20-08-000
1200	27-28 U	WZ-4755-20-07-000
1300	30 U	WZ-4755-20-06-000
1400	32-33 U	WZ-4755-20-05-000
1600	36 U	WZ-4755-20-04-000
1700	38-39 U	WZ-4755-20-03-000
1800	40-42 U	WZ-4755-20-02-000
2000	45-47 U	WZ-4755-20-01-000

Package: 1 pc.

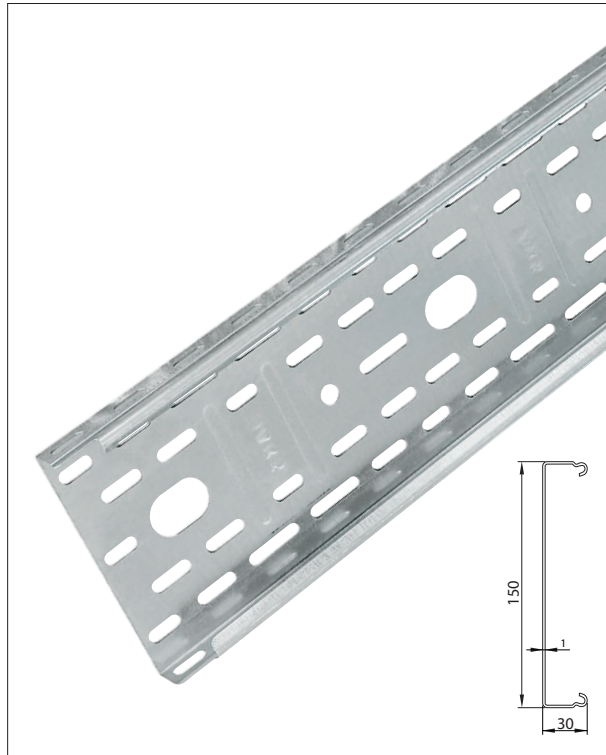**Wire cable tray**

Designed for vertical cable management inside the cabinet.
Fixed to horizontal C-profiles at the cabinet's side walls. Width 150 mm, depth 15 mm. In 600 mm wide **SZB IT** cabinets, wire cable tray can fit in the space between the C-profile and cabinet's side panel.

Material


Galvanized steel.

Scope of delivery

Cable tray with fixing accessories.

Cable tray length [mm]	For cabinet height [U = 44.45 mm]	Catalogue number
1100	24 U	WZ-4755-25-08-000
1200	27-28 U	WZ-4755-25-07-000
1300	30 U	WZ-4755-25-06-000
1400	32-33 U	WZ-4755-25-05-000
1600	36 U	WZ-4755-25-04-000
1700	38-39 U	WZ-4755-25-03-000
1800	40-42 U	WZ-4755-25-02-000
2000	45-47 U	WZ-4755-25-01-000

Package: 1 pc.

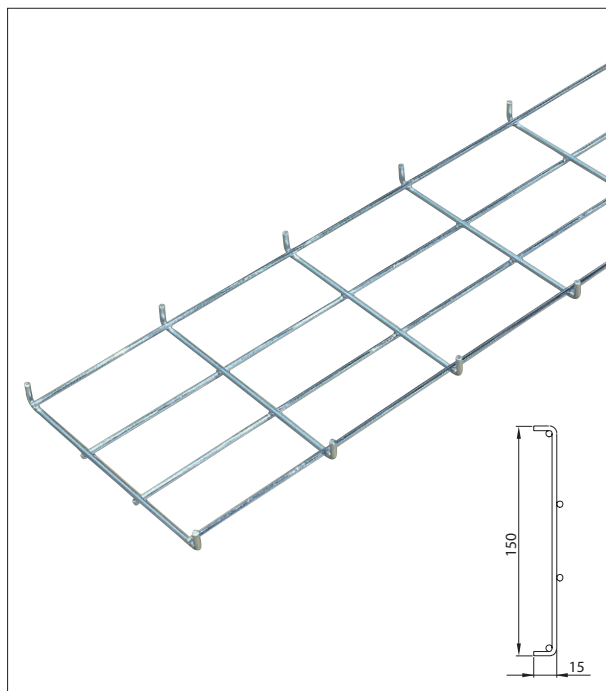


ACCESSORIES FOR CABINETS AND OPEN RACKS

CABLE MANAGEMENT



PVC cable ducts

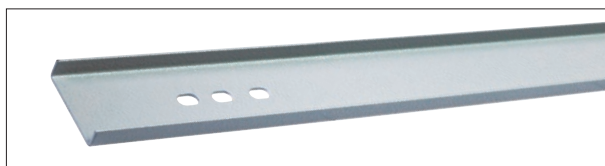

C-profile for stiffening PVC cable ducts



PVC cable duct fastened to the C-profile for cable duct stiffening



PVC cable duct with a C-profile for cable duct stiffening, installed in the SZB cabinet

PVC CABLE DUCT

Height [mm]	Width [mm]	Depth [mm]	Catalogue number
2000	40	40	M10-02-1428
		60	M10-02-1424
	60	80	M10-02-1438
		100	M10-02-1442

Package: 1 pc.

PVC cable ducts

Designed for vertical organization of cables inside the **SZB IT** cabinets.

Fixed to horizontal C-profiles at the cabinet's side walls with help of the stiffening C-profile.

Cable duct and stiffening C-profile are ordered separately.

Material

Cable duct - PVC

Stiffening C-profile - sheet steel Al-Zn coated

Scope of delivery

Cable ducts - sold in lengths of 2 m.

Stiffening C-profile - sold in lengths given in the table below;

C-profile scope of delivery includes fixing accessories for cabinet installation.

C-PROFILE FOR STIFFENING PVC CABLE DUCTS

Height [U = 44.45 mm]	For PVC ducts width [mm]	Catalogue number
15 U	40	WZ-SB00-31-22-000
	60	WZ-SB00-31-10-000
18 U	40	WZ-SB00-31-21-000
	60	WZ-SB00-31-09-000
21 U	40	WZ-SB00-31-36-000
	60	WZ-SB00-31-30-000
24 U	40	WZ-SB00-31-20-000
	60	WZ-SB00-31-08-000
27 U	40	WZ-SB00-31-35-000
	60	WZ-SB00-31-29-000
28 U	40	WZ-SB00-31-19-000
	60	WZ-SB00-31-07-000
30 U	40	WZ-SB00-31-34-000
	60	WZ-SB00-31-28-000
32 U	40	WZ-SB00-31-18-000
	60	WZ-SB00-31-06-000
33 U	40	WZ-SB00-31-33-000
	60	WZ-SB00-31-27-000
36 U	40	WZ-SB00-31-17-000
	60	WZ-SB00-31-05-000
38 U	40	WZ-SB00-31-16-000
	60	WZ-SB00-31-04-000
39 U	40	WZ-SB00-31-32-000
	60	WZ-SB00-31-26-000
40 U	40	WZ-SB00-31-15-000
	60	WZ-SB00-31-03-000
42 U	40	WZ-SB00-31-14-000
	60	WZ-SB00-31-02-000
45 U	40	WZ-SB00-31-13-000
	60	WZ-SB00-31-01-000
47 U	40	WZ-SB00-31-31-000
	60	WZ-SB00-31-25-000

Package: 1 pc.

ACCESSORIES FOR CABINETS AND OPEN RACKS

MONITORING AND ACCESS CONTROL

AKCP - Monitoring of device operating conditions and access control**Measurement of any environmental parameters and detection of alarm conditions**

Continuous control of temperature, humidity, flooding, airflow, smoke, motion, vibration, power consumption, door opening and other parameters depending on the sensors used.

Video surveillance system

Possibility of connecting cameras and continuous recording of images on the server.

In-line Power Meter control and monitoring of power supply parameters

Power management for the connected power strips via AKCess Pro Server. Possibility of configuring notifications for exceeding the defined thresholds, automatic power off in emergency situations.

Software for managing equipment and collected data

The data from the connected devices can be viewed by the administrator using clear, configurable software and can be used as a basis for further actions.

SensorProbeX+ (SPX+) and SensorProbe2+ (SP2+) data hubs

Choice of two types of data hubs for smaller installations and complex monitoring networks.

Easy to set up, expand and use

The modular configuration of the SPX+ data hub ensures easy customization according to your needs and requirements.

Intelligent ports - right-away readiness

Hubs are equipped with intelligent ports that automatically recognize the type of connected AKCP sensor.

Modbus communication - ideal for industrial applications

Thanks to the EXP port in the SPX+ data hub, it is possible to connect to sensors using Mod bus RTU-TCP communication.

Access control - protection for cabinets and rooms

The AKCP system allows you to secure any door with remotely controlled lock and proximity card reader.

ELEMENTS OF THE SYSTEM**SensorProbeX+
modular data hub**

Advanced data hub, designed for horizontal 19" or vertical mounting. Modularly built, it allows for custom configuration. Examples of modules include: an internal communication modem, a potential-free contact module or an intelligent sensor ports module. SPX+ is ideally suited for monitoring applications in data centres and industrial production areas.

**SensorProbe2+
basic data hub**

Data hub, equipped with 4 RJ-45 sockets and Ethernet socket, optionally also with GSM module. Supports 4 intelligent sensors or up to 20 potential-free inputs. It is possible to connect expansion modules.

Programmable display**Power control****Sensors and detectors****Access control handle****Software**

ACCESSORIES FOR CABINETS AND OPEN RACKS

MONITORING AND ACCESS CONTROL

AKCP - Monitoring of device operating conditions and access control**MANAGEMENT SOFTWARE****AKCess Pro Server**

= { monitoring of environmental conditions
power management
video surveillance
access control

Full supervision and prevention of accidents

Combines environmental monitoring, access control, and video surveillance functionality.

Automatic recognition of connected devices

Cameras, sensors, access control elements – just connect and start up.

Compatibility with other manufacturers' equipment

Possibility of connecting any cameras and sensors.

Monitoring and control of all devices on one screen

Easy configuration of the desktop and customisation of the control panel (dashboard) according to user's needs.

Creating scalable maps that contain data from connected sensors and cameras

Visualization of data on geographic maps, building plans and other monitored spaces.

Supervision from anywhere

Possibility of installing the software on any computer with Windows and Internet access.

Event notification system

Immediate notification of alarms and other defined events via e-mail, Skype or SMS.

Time schedules

Creating different automatically triggered event scenarios.



VENTILATION AND AIR-CONDITIONING



VENTILATION AND AIR-CONDITIONING

VENTILATION SYSTEMS



PW-1.2T



PW-1.3T



PW-2.4T



Fan units are equipped with operation mode switch:
I - continuous work,
0 - fans off,
II - switching by thermostat.
Includes socket for connecting the thermostat. Thermostat is ordered separately.



PW fan units

Fan units 1 U high, intended for assembly on 19" mounting profiles or in 19" swing frames.

In the standard version, the units are equipped with 2, 3 or 4 fans, operating mode switch, fuse, power cord (without plug) and socket for thermostat connection.

TECHNICAL DATA

Parameter	Type of fan unit		
	PW-1.2T	PW-1.3T	PW-2.4T
Power supply voltage	220-240 V ~ 50 Hz		
Rated current [A]	0.28	0.42	0.56
Number of fans	2	3	4
Power rating [W]	44	66	88
Capacity [m³/h]	330	495	660
Ambient temperature [°C]	from -10 to +70		
Relative humidity [%]	from 20 to 80		
Protection degree	IP 20		
Electric shock protection	neutralization		

Enclosure material

Sheet steel powder painted.

Enclosure colour

Light grey (RAL 7035) or black (RAL 9005).

Scope of delivery:

Fan unit with power cord (without plug) and fixing accessories.

Thermostat is ordered separately - see below.

Type of fan unit	Number of fans	Depth [mm]	Catalogue number	
			RAL 7035	RAL 9005
PW-1.2T	2	180	WZ-5606-25-01-011	WZ-5606-25-01-161
PW-1.3T	3	180	WZ-5606-05-01-011	WZ-5606-05-01-161
PW-2.4T	4	350	WZ-5606-35-01-011	WZ-5606-35-01-161

Package: 1 pc.

Thermostat for PW fan units

Thermostat with power cord and plug.

Adapted for mounting on DIN rails.

Detailed description of the thermostat: see page 91.

Package	Catalogue number
1 pc.	WN-0201-12-00-000

VENTILATION SYSTEMS

PWD and PD roof fan units

Roof fan units are intended for assembly to 380 x 380 and 380 x 210 mm openings which are located in the top plates of **SZB IT**, **SZE2 PC** and **Z-SERVER** cabinets.

In the standard version, the units are equipped with 2 or 4 fans, an illuminated switch, fuse, power cord (without plug) and integrated thermostat (optional, depending on panel type).

TECHNICAL DATA

Parameter	Type of fan unit		
	PWD-4W	PWD-2W	PD-2W
Power supply voltage	220-240 V ~ 50 Hz		
Rated current [A]	0.56	0.28	0.28
Number of fans	4	2	2
Power rating [W]	88	44	44
Capacity [m³/h]	660	330	330
Ambient temperature [°C]	from -10 to +70		
Relative humidity [%]	from 20 to 80		
Protection degree	IP 20 (refers to fan units mounted in the cabinet)		
Electric shock protection	neutralization		

Enclosure material

PWD-4W and PWD-2W fan units - plastic.
PD-2W fan unit - sheet steel.

Enclosure colour

Light grey (RAL 7035) or black (RAL 9005)

Scope of delivery

Fan unit with power cord (without plug) and fixing accessories.

Fans used in fan units:

PW, PWD and PD fan units are provided with high quality fans with ball bearings.

TECHNICAL DATA OF ONE FAN:

- voltage rating 220-230 V AC
 - frequency 50 Hz
 - power rating 22 W
 - rated current 0.14 A
 - rotation speed 2850 1/min
 - noise level ca. 45 dB
 - pressure 75 Pa
 - air flow 165 m³/h
 - durability min. 50 000 h
 - dimensions 119 x 119 x 38 mm

**PWD-4W****PWD-4W
with integrated
thermostat****PWD-2W****PWD-2W
with integrated
thermostat****PD-2W**

Type of fan unit	Number of fans	For opening's dimensions [mm]	Catalogue number	
			RAL 7035	RAL 9005
PWD-4W	4	380 x 380	WN-0200-06-01-011	WN-0200-06-01-161
PWD-4W with integrated thermostat	4	380 x 380	WN-0200-06-04-011	WN-0200-06-04-161
PWD-2W	2	380 x 380	WN-0200-07-01-011	WN-0200-07-01-161
PWD-2W with integrated thermostat	2	380 x 380	WN-0200-07-04-011	WN-0200-07-04-161
PD-2W	2	380 x 210	WN-0200-03-00-011	WN-0200-03-00-161


Package: 1 pc.

VENTILATION SYSTEMS

**Operation mode switch:****I - continuous work****0 - fans off****II - switching by thermostat**

External thermostat in position II switches on the fans and power up additional C13 socket.

It is possible to connect with one thermostat up to 3 panels to common power supply or control next panels with additional thermostats.

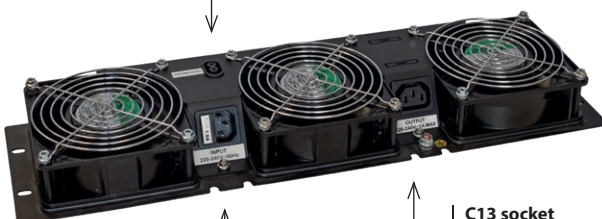**Thermostat for PW fan units**
WN-0201-12-00-000
(see page 88)**C7 socket for connecting the thermostat****C14 socket for connecting the power cord****C13 socket for connecting additional PW-3U3 fan units****Power cords Unischuko-C13**2.5 m
M1T-02-13001.8 m
M1T-02-1301**Cords connecting panels C14-C13**1 m
M1T-02-13030.5 m
M1T-02-1302**PW-3U3 fan unit**

Fan unit 3 U high, intended for assembly on 19" mounting profiles or in 19" swing frames.

In the standard version, the unit is equipped with 3 fans, operation mode switch, fuse, socket for connecting the thermostat and socket for connecting additional PW-3U3 fan units (the maximum number of panels connected to the common power supply are 3 pieces).

Rectangular openings to fasten thermostats are on front, back and top of the panel.

TECHNICAL DATA

Parameter	PW-3U3 fan unit
Power supply voltage	220-240 V~ 50 Hz
Rated current	0.42 A
Fuse type	WTA-T 5x20 250 V
Fuse protection	1.6 A
Number of fans	3
Rated power	66 W
Air flow	490 m³/h
Noise level	55 dBA
Current and power consumption tolerance	+/-15%
Working temperature	from -10 to +70 °C
Relative humidity	20-80% (without condensing)
Protection degree	IP 20
Protection class	I
Net weight	2.45 kg

Enclosure material

Sheet steel powder painted.

Enclosure colour

Black (RAL 9005).

Scope of delivery

PW-3U3 fan unit with fixing accessories.

Thermostat, power cord and connecting cords are ordered separately.

Product name	Catalogue number
PW-3U3 fan unit	WN-3050-00-161
Power cord 1.8 m Unischuko-C13	M1T-02-1300
Power cord 2.5 m Unischuko-C13	M1T-02-1301
Cord connecting panels 0.5 m C14-C13	M1T-02-1302
Cord connecting panels 1 m C14-C13	M1T-02-1303
Thermostat for PW fan units	WN-0201-12-00-000

Package: 1 pc

VENTILATION SYSTEMS

Thermostat

Thermostats are used for controlling fan units, heaters and heat exchangers; they can also be used as signal generators for monitoring the internal temperature of the enclosure.

TECHNICAL DATA


Parameter	Thermostat
Sensor element	thermal bimetal
Temperature range	0-60°C, hysteresis ca. 7 °C
Contact type	snap action contact
Power carrying capacity	6 A (1) 250 V AC
Radio frequency interference	N (according to VDE 0875)

Scope of delivery

Thermostat, DIN rail, cable without plug, 2 holders, 2 terminal blocks.

Product name	Knob colour	Catalogue number
Thermostat NO - normally open Switches on ventilation system (e. g. fans) at selected temperature limit.	Blue	WN-0201-02-00-000/A
Thermostat NC - normally closed Switches off devices (e. g. heaters) at selected temperature limit.	Red	WN-0201-01-00-000/A

Package: 1 pc.

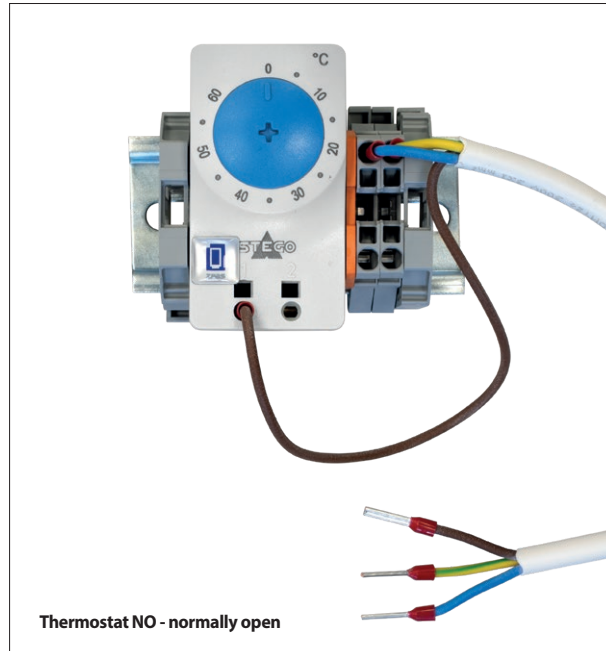

Hygrostat

Electric regulator of humidity controls air humidity, switches on fans, heaters or air conditioning units.


TECHNICAL DATA

Parameter	Hygrostat
Measuring range	35-95% of relative humidity
Hysteresis referred to 50 % RH	about 4% of relative humidity
Maximum voltage	250 V AC
Minimum load	100 mA, 20 V DC/AC
Maximum resistive load	5 A, 230 V
Maximum inductive load cos $\phi = 0,8$	0.2 A, 230 V AC
Maximum inductive load L/R = 3 ms	1 A to 50 V DC 0.5 A to 75 V DC

Scope of delivery

Hygrostat, DIN rail, cable without plug, 2 holders, 2 terminal blocks.

Package	Catalogue number
1 pc	WN-0201-03-00-000/A

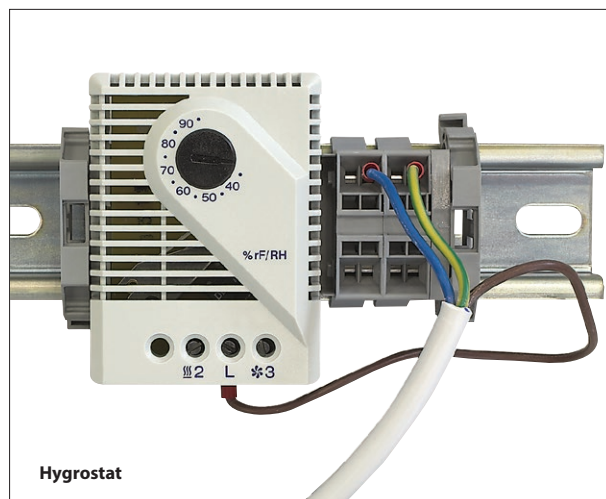

AIR-CONDITIONING SYSTEMS



Closed circuit
- cooling with side heat exchanger



Open circuit
- cooling with row heat exchangers

In Data Center facilities the right temperature, humidity and quality of air delivered by precision cooling devices are the most important factors ensuring operational continuity of computational units. Precision air conditioning is essential for providing proper microclimate 24 hours a day throughout the year.

ZPAS air conditioning portfolio can be divided according to air flow concepts and cooling agent. Our offer encompasses both air conditioners for single cabinets, side and row heat exchangers, as well as precision air-conditioning cabinets for server rooms.

Side and row heat exchangers

Nowadays, data centres are usually cooled by means of cool air inlets running under the access floor or through direct blow of cold air into the room, which can lead to mixing of cold and hot air, thus, compromising the air conditioning efficiency. Uneven distribution of equipment in terms of generated heat can also create hot spots. By using row or side heat exchangers, you can avoid these problems and provide an optimal environment for electronic equipment.


KEY FEATURES AND FUNCTIONAL PROPERTIES

- Easy mounting without any interference inside the cabinet.
- Constant, even flow of air.
- Shortening the path that cold air travels to active devices.
- Direct removal of hot air from active devices.
- Exchanger redundancy N+1 easily achieved.
- Cooling agent supply from the top or from the bottom of the heat exchanger.
- Heat exchangers suitable for 42, 45 and 47 U cabinets as well as for cabinets of 1000 mm and 1200 mm in depth.
- Possibility to replace filters "on the fly".
- Allows for collecting condensate and removing it outside mechanically using a condensate extraction pump.
- Inputs for hydraulic connections making it possible to connect at the top or at the bottom of the heat exchanger.
- Temperature and humidity measurement.
- Advanced controller that controls various modes of exchanger operation.
- Communication via Ethernet.


AIR-CONDITIONING SYSTEMS

Separate air-conditioning units


Separate air-conditioning units make up a group of air-conditioning equipment designed for RACK type cabinets. Separate air-conditioning units make additional devices delivering air into the cabinet unnecessary. Selection of the air conditioner should be consulted with ZPAS customer service.

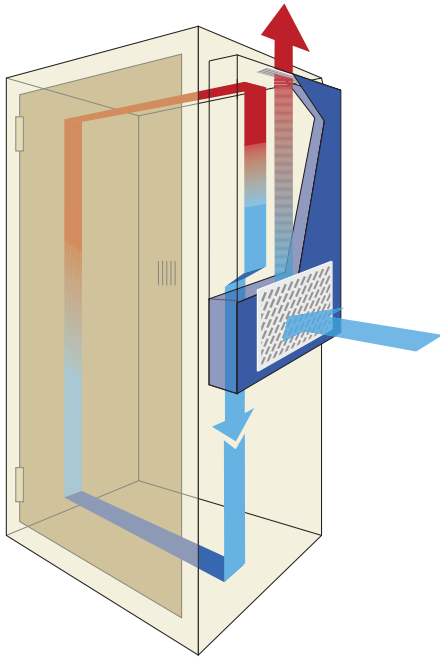


PROTHEM
Air-conditioning unit mounted on the cabinet's side panel. Cooling capacity ranging from 360 to 5600 W

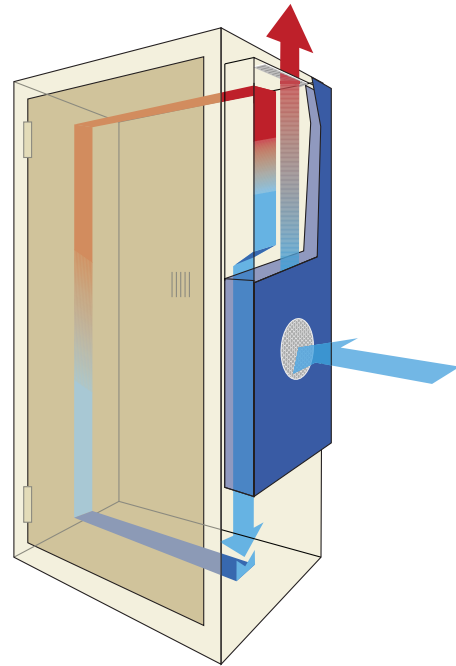

SLIM
Air-conditioning unit mounted on the cabinet's door or side panel. Cooling capacity: from 500 to 3000 W

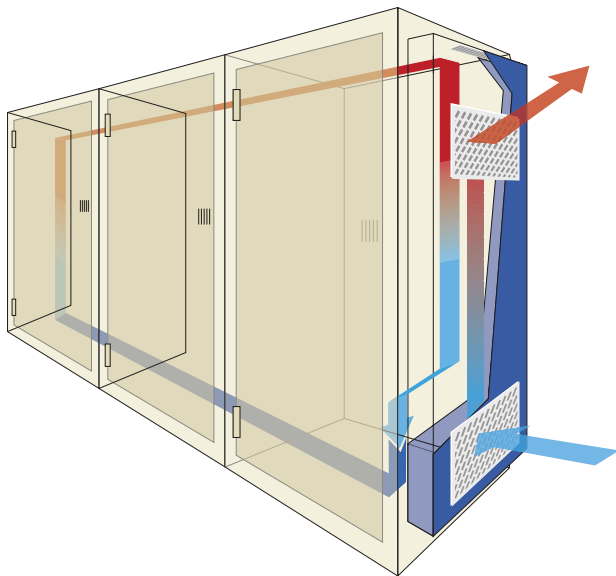


MODULE
Air-conditioning unit intended for cooling more than one cabinet. Mounted on the side of a system of combined cabinets. Cooling capacity ranging from 5800 to 10000 W

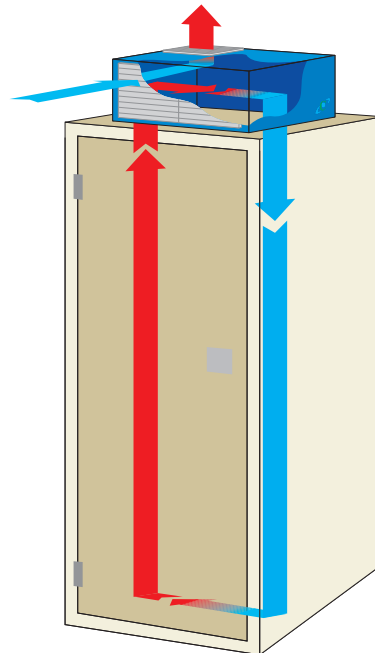

TOP
Rooftop air-conditioning unit. Cooling capacity ranging from 330 to 5200 W

POWER SUPPLY SYSTEMS

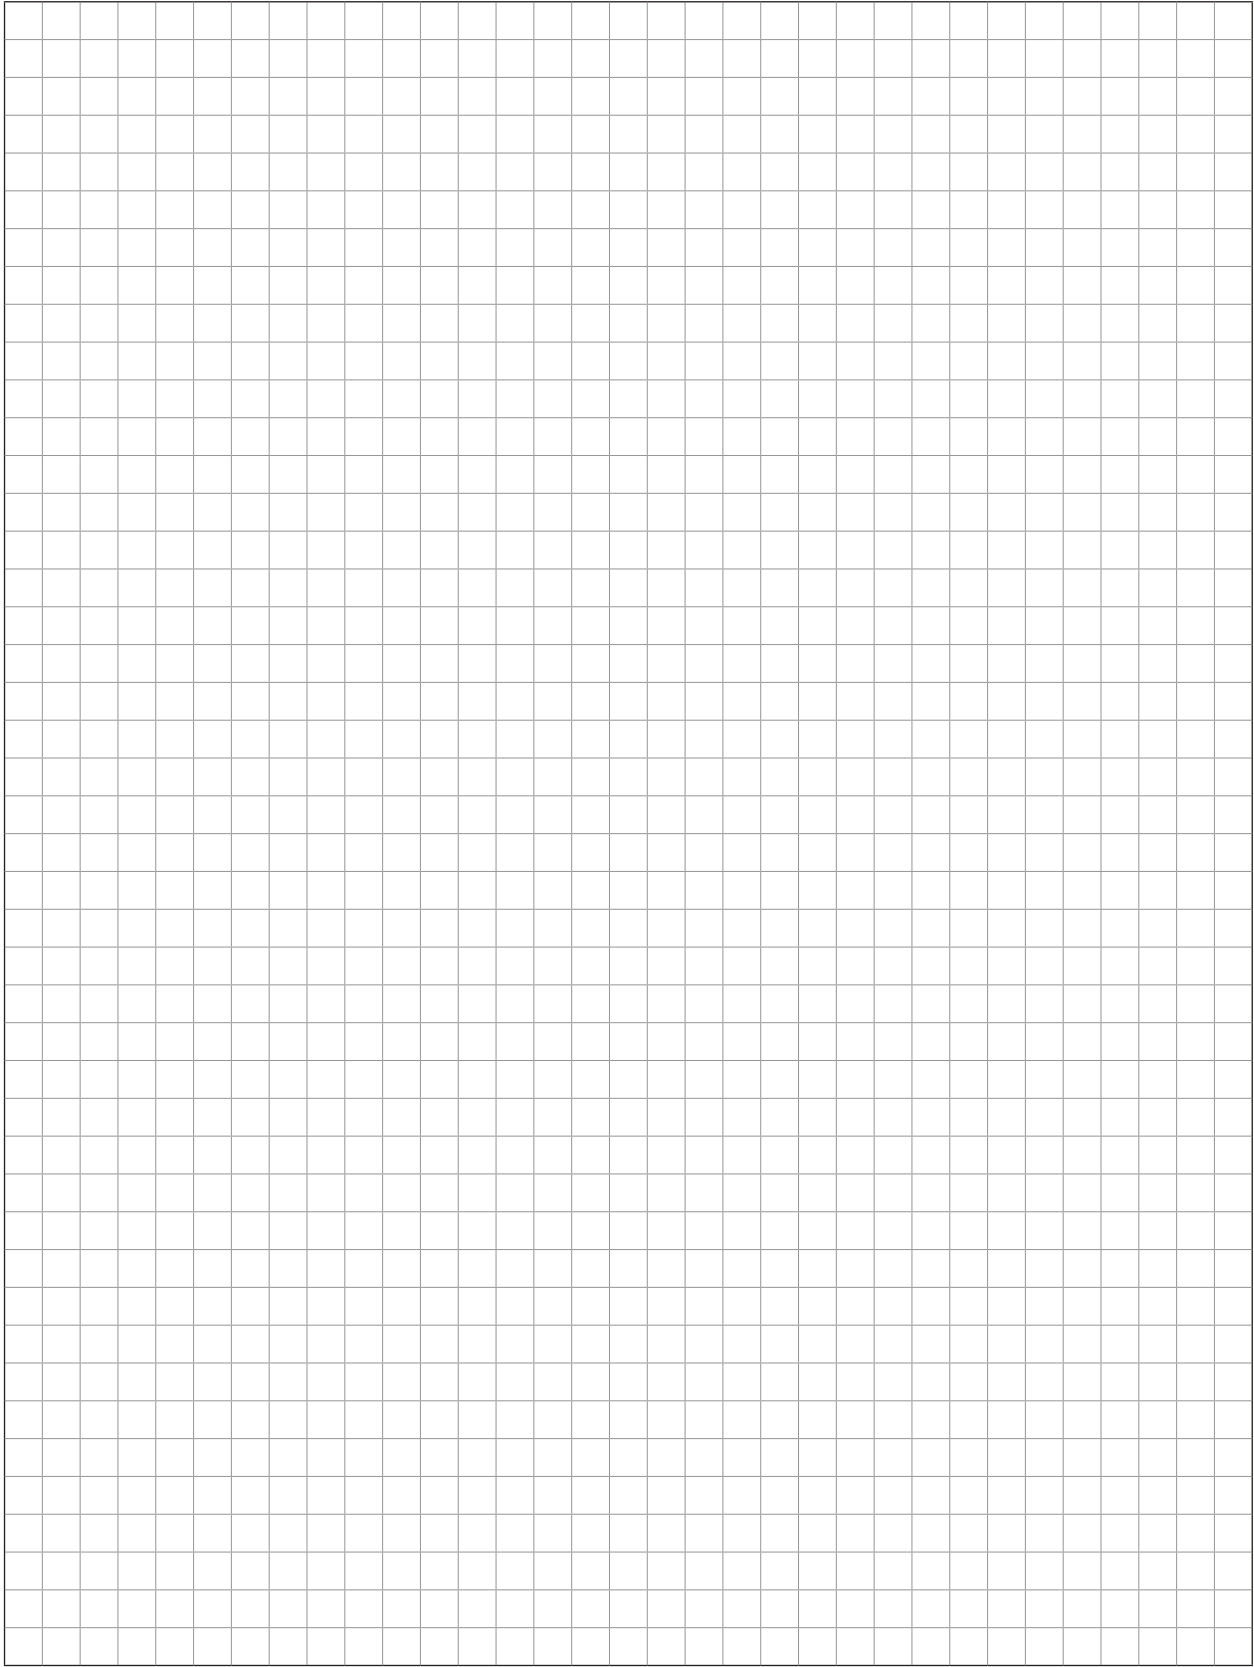

POWER SUPPLY SYSTEMS



POWER SUPPLY SYSTEMS

Basic PDU^{19"}

BASIC 19" POWER STRIPS

Characteristics



Anodized aluminium body, in natural colour.
Plastic elements: light-grey similar to RAL 7035.
Removable metal mounting brackets.
Possibility to mount the strip on 4 positions.

Technical data

Nominal voltage: 230 V AC
Maximum load: 16 A / 3680 W
Protection degree: IP 20
Power cord: 3 m, black, conductor section 1,5 mm²
(other lengths within of 1-5 m scope,
available on request)

Scope of delivery

Power strip with brackets, set of fixing accessories.

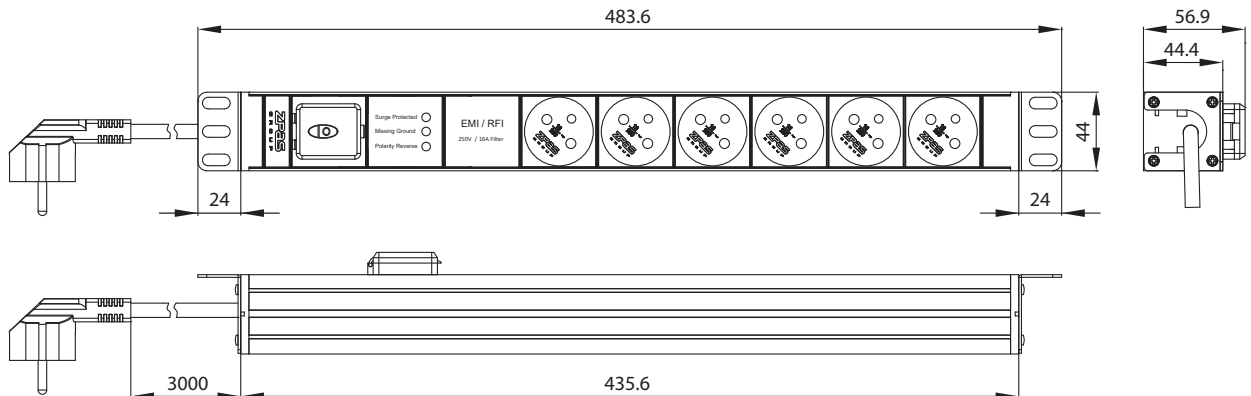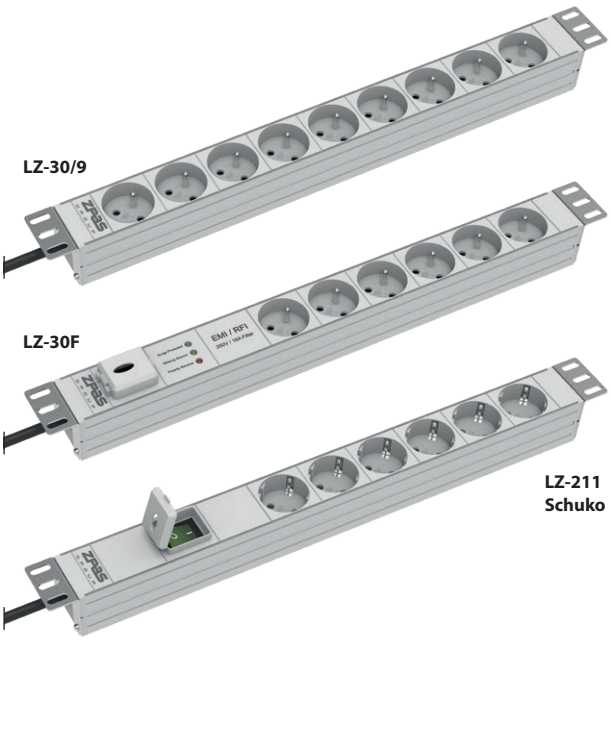

Maximum load	Installation	Type	Body dimensions [mm]	Equipment					Catalogue number
				Illuminated switch	Surge protection	RFI noise filter	Number of IUT sockets	Number of Schuko sockets	
16 A 230 V 1 phase	19 inch	LZ-30/9	435.6 x 44 x 44.4				9		WZ-LZI30-09-00-000
		LZ-30/9 Schuko	435.6 x 44 x 44.4					9	WZ-LZI30-09-SU-000
		LZ-30F	435.6 x 44 x 56.9	•	•	•	6		WZ-LZ30-F0-00-000
		LZ-30F Schuko	435.6 x 44 x 56.9	•	•	•		6	WZ-LZ30-F0-SU-000
		LZ-211	435.6 x 44 x 56.9	•			6		WZ-LZ21-10-00-000
		LZ-211 Schuko	435.6 x 44 x 56.9	•				6	WZ-LZ21-10-SU-000

ADVANCED POWER STRIPS

Smart PDU

Advantages and functions

Energy efficient latching relays

Uses energy efficient bi-stable latching relays. These relays consume up to 70% less energy than alternatives, making outlet switching safer and configured in such a way that the outlet power distribution is always maintained.

**OLED display**

Shows input power parameters and scroll individual outlet (V, A, PF, W, kWh). Screen turns its orientation according PDU position.

**Accurate environment monitoring cascading sensors EMD**

The sensors benefit from the latest, most high-tech metering components, delivering the highest metering accuracy for temperature and relative humidity. Each sensor is built with 2 additional digital input contacts for water leak, door contact, motion, vibration, smoke and any other sensor with normally open or closed. Sensors can be deployed in cascade up to 8 EMD sensors using network cables.

**PDU cascading option**

In order to save on network ports and manage multiple devices from one IP address we offer the opportunity to daisy chain up to 16 PDUs using Cat5/6 cable.

**kWh metering accuracy**

Enabling precise allocation of data centre expenses with +/- 1% billing grade accuracy.

**High outlet flexibility and alternating phase**

IEX socket is a UL and IEC tested combination of C13 and C19 outlet that accommodates either a C14 and or C20 plug. Alternating phase set up helps on power balance for three phase systems.

**RCM residual current monitoring option**

By measuring current flowing in the ground wire, our residual current monitoring reduces the risk of electric shock. PDUs equipped with residual current monitoring dramatically reduce the burden of regulatory auditing.

**Secure locking outlets**

ZPAS intelligent rack PDUs are equipped with lockable outlets preventing power cords accidentally coming unplugged due to human error or vibration.

**Interoperability with third party software**

If you need to centrally manage all PDUs in your data centre we offer all communication protocols. Our solutions offer the option to communicate the status of rack-level power and environmental information to any third party datacentre infrastructure management (DCIM) solution.

**Field-replaceable controller**

The hot-swappable onboard controller, ensures that servers will never experience downtime when maintenance in the Data Centre is required and ensuring the infrastructure will never be obsolete being update ready.

**Redundant network connection**

World's first double Gigabit ethernet port PDU ensures monitoring reliability and allowing to be shared with data centre management and end clients in one or two separate networks.

**Security**

PDUs support the most stringent security protocols in the market in order to prevent unauthorized access (256 bit AES encryption, Radius, SNMP v3, user permissions, SSH v2, SSL, HTTPS).

**Hydraulic-magnetic circuit breakers monitoring**

Built with highly reliable hydraulic-magnetic circuit breakers which are not affected by ambient temperature and support delay curves appropriate for IT-equipment. The PDU proactively monitoring the status of the breakers in order to prevent downtime due to server power supply failure or overloads, sending an alert for any high load that risk a tripped circuit.

**Full colour range**

Coloured PDUs make it easier to reduce human errors, identify power feeds, lowering the risk of unplanned downtime, PDUs are available in any RAL-colour.




Smart PDU

ADVANCED POWER STRIPS


Lite network controller

Used in PIML PDUs

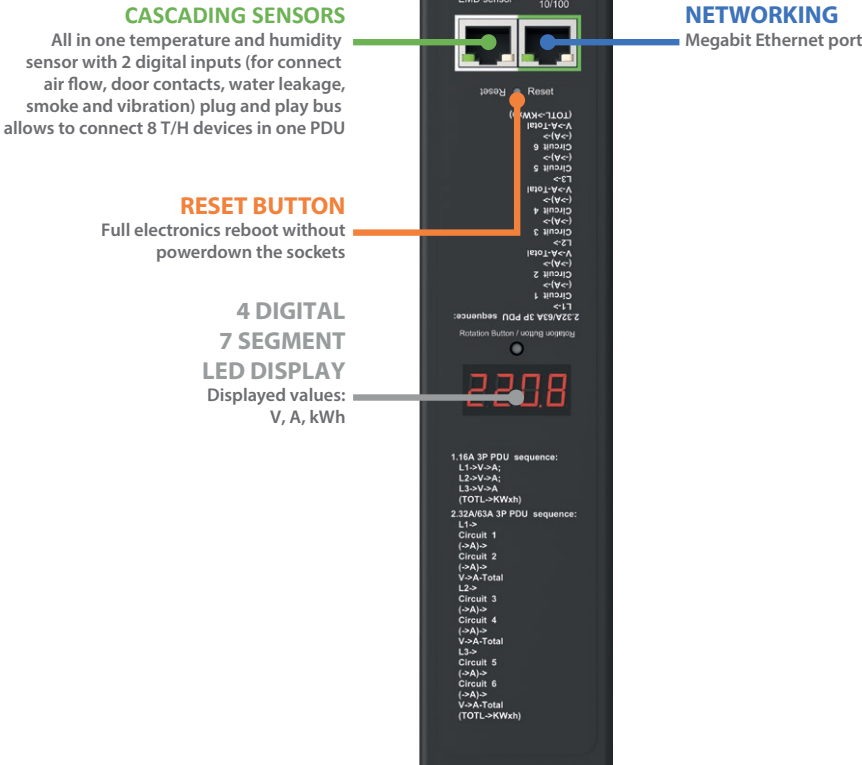

Advanced network controller

Used in PIM, POM, POS and POMS PDUs

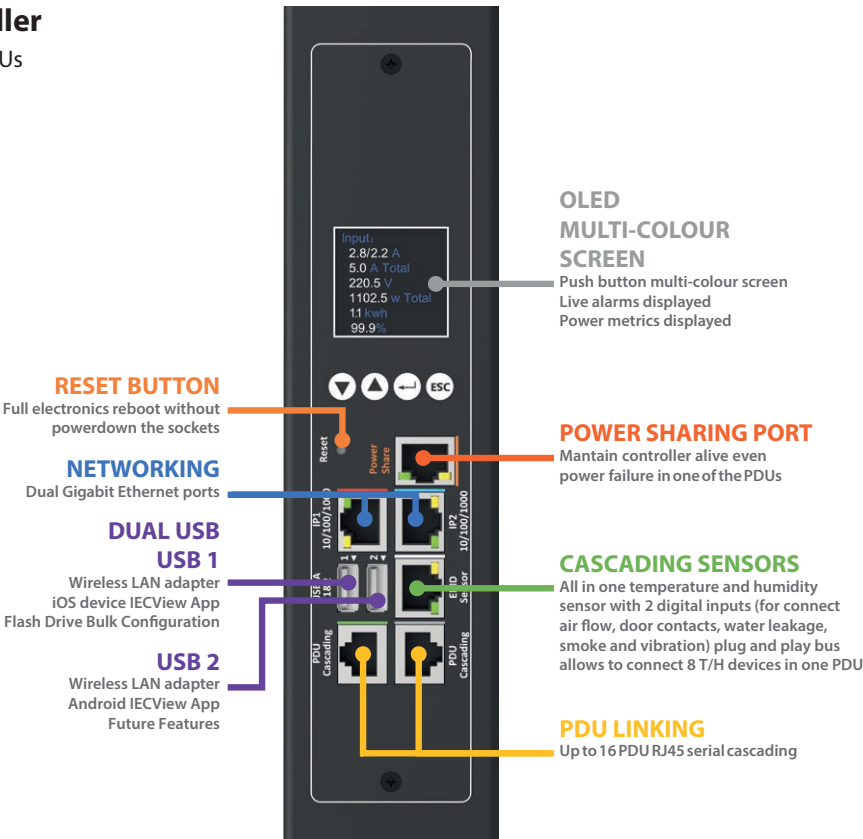

ADVANCED POWER STRIPS


Smart PDU**IEX - full flexibility of socket types during long operation**

The new IEX socket is a combination of the C13 and C19 outlet standards that gives the maximum flexibility with the ability to hold both C14 and C20 plugs.


Fully patented and backed by IEC/EN and UL safety certifications it brings reliability in design.

IEX removable locker for C14 plugs and lockable power cords for C20 plugs

The IEX Lock-VP is a removable component that makes standard C14 plugs lock securely. The C20 Socket design has built in locking compatibly as standard with P-LOCK and V-LOCK plugs.

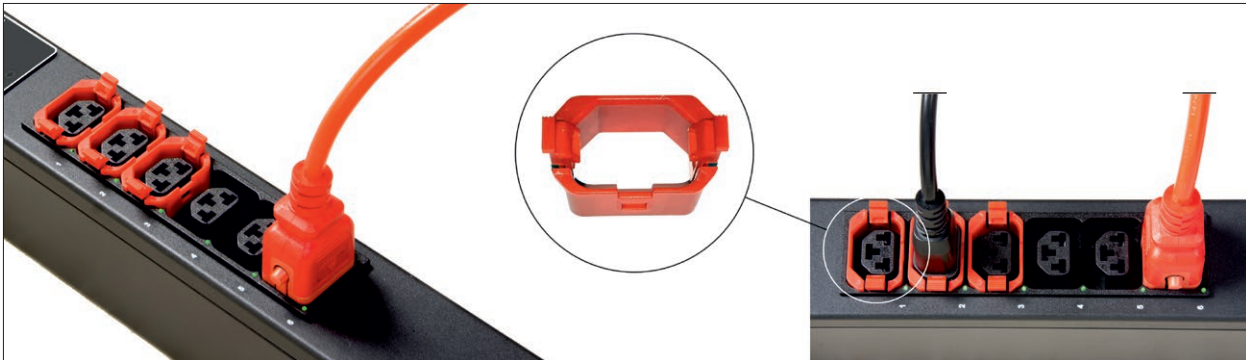**Flexible environmental monitoring with smart sensors**

The EMD is an environmental monitoring device that allows you to monitor temperature and humidity and status for 2 digital input sensors such as water leakage, door contact, motion, vibration, smoke and any other sensor with normally open or closed. Sensors can be deployed in cascade up to 8 EMD sensors using network cables.

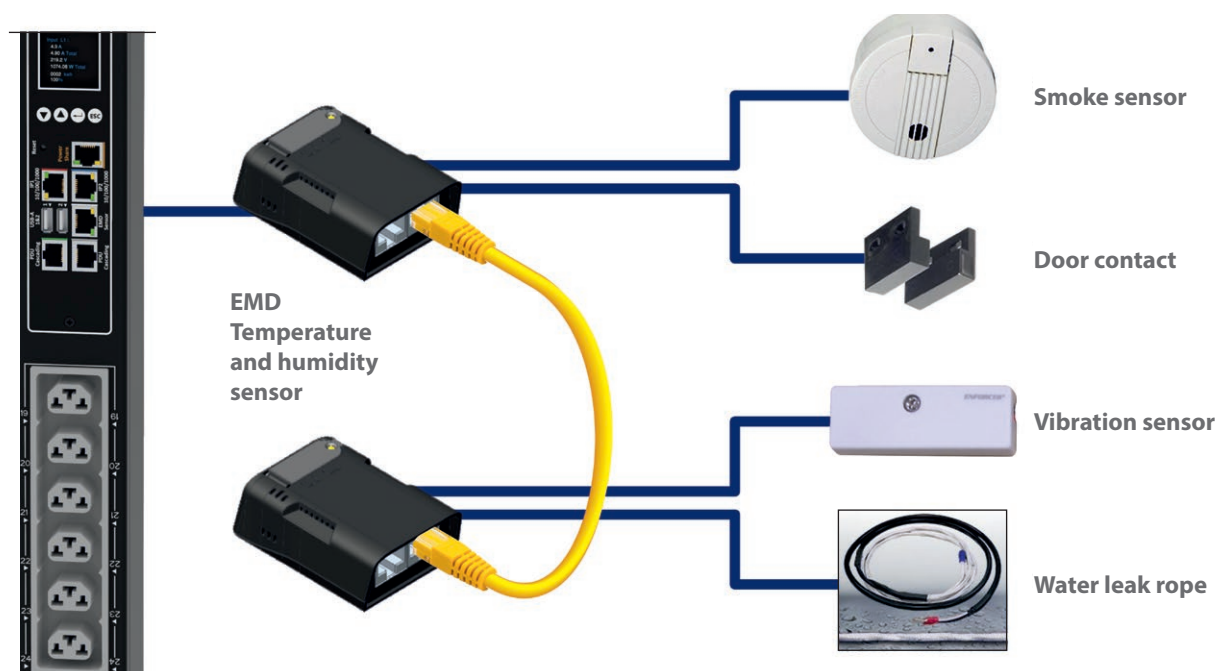

Smart PDU

ADVANCED POWER STRIPS

Characteristics and technical data

The housing is made of an ultra-light aluminum or stainless steel profile, painted in black RAL 9004. Possibility of painting in any RAL colour. Available sockets: C13, C19, IEX, Schuko, UTE (with a pin). Universal IEX socket operates with IEC 320 C14 and IEC 320 C20 from servers, UPS and other devices.

The sockets are available in white, gray and black colour. The C14 plug adapters are red or in the colour of the sockets.

Fully regulated assembling options by three included sets of brackets. Possibility of assembling in 4 positions.

Protection degree: IP 20. Power cord: 3 m, black, with IEC 60309 plug.

Conductor section: 1 phase 16 A - 1.5 mm², 3 phase 16 A - 2.5 mm², 1/3 phase 32 A - 4.0 mm².

The above characteristics apply to the basic power distribution units and the types described below.

Power Meter PDU

Built-in energy meter with 4 digital - 7 segment LED display and the changing switch of displayed parameters.

Energy metering: voltage [V], current [A], active power [W], power factor [%], energy consumption [kWh].

Smart PDU - common features

Energy metering: voltage [V], current [A], active power [W], apparent power [VA], reactive power [VAR], frequency [Hz], power factor [%], energy consumption [kWh]. Residual Current Monitoring - optional.

Networking Protocols: DHCP, Ipv4 and Ipv6, DNS, http/https, SSHv.2, SNMP v1/v2c/v3, SNMP TRAPS/SETS/GETS, SMTP, Modbus, Telnet, TCP, RADIUS, Syslog, TLS 1.2, SNTP, ARP, ICMP, ICMP v6, UDP, NDP.

Reset button - full electronics reboot without power down the sockets.

Per Inlet Monitoring Lite Smart PDU

Built-in lite network controller with 4 digital - 7 segment LED display and the changing switch of displayed parameters: voltage [V], current [A], energy consumption [kWh]. Other measured parameters are available after connection with the power strip in users interface. Ports: 1x Ethernet 1 Megabit, 1x Environmental Sensors.

Smart PDU with an advanced controller - common features

Replaceable Hot Swappable controller with 4 button OLED display.

Ports: 2x Ethernet 1 Gigabit, 2x USB, 2x Daisy Chain, 1x Power Share, 1x Environmental Sensors.

Possible functions:

- **Per Inlet Monitoring Smart PDU**
Monitoring at the level of each phase circuit and 16 A of hydraulic-magnetic switches (applies to PDUs with a maximum load of 32 A).
- **Per Outlet Monitoring Smart PDU**
Monitoring per input line and individual sockets.
- **Per Outlet Switching Smart PDU**
Monitoring per input line. Remote sockets switching with LED socket status indicator.
- **Per Outlet Metering and Switching Smart PDU**
Monitoring per input line and individual sockets. Remote sockets switching with LED socket status indicator.

SELECTED PDU CONFIGURATIONS

Maximum load	Equipment				Catalogue number	PDU functions shortcut to insert in the index in an empty space e.g. WZ-LZ-_11618IEX → WZ-LZ-POMS11618IEX
	Hydraulic-magnetic circuit breakers	IEX sockets	C13 sockets	C19 sockets		
1 phase 230 V, 16 A		18			WZ-LZ-_11618IEX	B – basic (no electronics) PM – built-in power meter PIML – remote monitoring per input line - Lite version PIM – remote monitoring per input line - advanced POM – remote monitoring per input line and individual sockets POS – remote monitoring per input line + sockets switching POMS – remote monitoring per input line and individual sockets + sockets switching
			20	4	WZ-LZ-_11620C134C19	
1 phase 230 V, 32 A	2	24			WZ-LZ-_13224IEX	
3 phase 380-415 V, 16 A		24			WZ-LZ-_31624IEX	
3 phase 380-415 V, 32 A	6	36			WZ-LZ-_33236IEX	
	6		30	6	WZ-LZ-_33230C136C19	

In order to select a different configuration, please contact the ZPAS sales department.

ADVANCED POWER STRIPS **Smart PDU**

Examples of PDU configurations



Smart PDU

ADVANCED POWER STRIPS


POWER STRIPS COMPARISON

Characteristics	PDU types						
	BASIC	PM built-in power meter	PIML remote monitoring per input line Lite version	PIM remote monitoring per input line Advanced	POM remote monitoring per input line and individual sockets	POS remote monitoring per input line + sockets switching	POMS remote monitoring per input line and individual sockets + sockets switching
Mechanical features <ul style="list-style-type: none"> - ultra light aluminium or stainless steel profile, - full adjustable mounting options, - low profile hydraulic magnetic breakers 10 kA Icn, - sockets: C13, C19, IEX, UTE, Schuko 	✓	✓	✓	✓	✓	✓	✓
Inlet energy metering <ul style="list-style-type: none"> - PDU input energy metering (kWh), - PDU input power measurements (W, VA, VAR), - PDU input (A, V, PF Hz) measurements, - circuit breaker monitoring, - residual current monitoring (optional), - 3 phase balance indicator. 		✓	✓	✓	✓	✓	✓
Security management <ul style="list-style-type: none"> - memory logs for historical data and graphics, - user and alarms thresholds customizable. 			✓	✓	✓	✓	✓
SNMP controller <ul style="list-style-type: none"> - PDU cascading (up to 16 PDUs), - hot swappable and replaceable controller, - double Gigabit Ethernet port, - controller power share. 				✓	✓	✓	✓
Outlet control <ul style="list-style-type: none"> - remote On/Off by individual outlet or groups, - power On/Off delay, - sequential startup, - user level security assignable, - individual LED x outlet status indicator. 					✓		✓
Outlet metering <ul style="list-style-type: none"> - PDU output energy metering (kWh), - PDU output power measurements (W, VA, VAR), - PDU output (A, V, PF, Hz) measurements. 						✓	✓
Environmental metering <ul style="list-style-type: none"> - Environmental sensor (temperature & humidity), - cascading (up to 8), - door contact, - smoke detection, - vibration, - motion sensor, - water leakage, - user and alarms thresholds customizable. 			✓	✓	✓	✓	✓
Network and security <p>DHCP, IPv4 and IPv6, DNS, http/https, SSH v.2, SNMP v1/v2c/v3, SNMP TRAPS/SETS/GETS, SMTP, Modbus, Telnet, TCP, RADIUS, Syslog, TLS 1.2, SNMP.</p>			✓	✓	✓	✓	✓

ADVANCED POWER STRIPS


Smart PDU

C13/C19 COMBINATION SOCKETS COMPATIBLE POWER CORDS

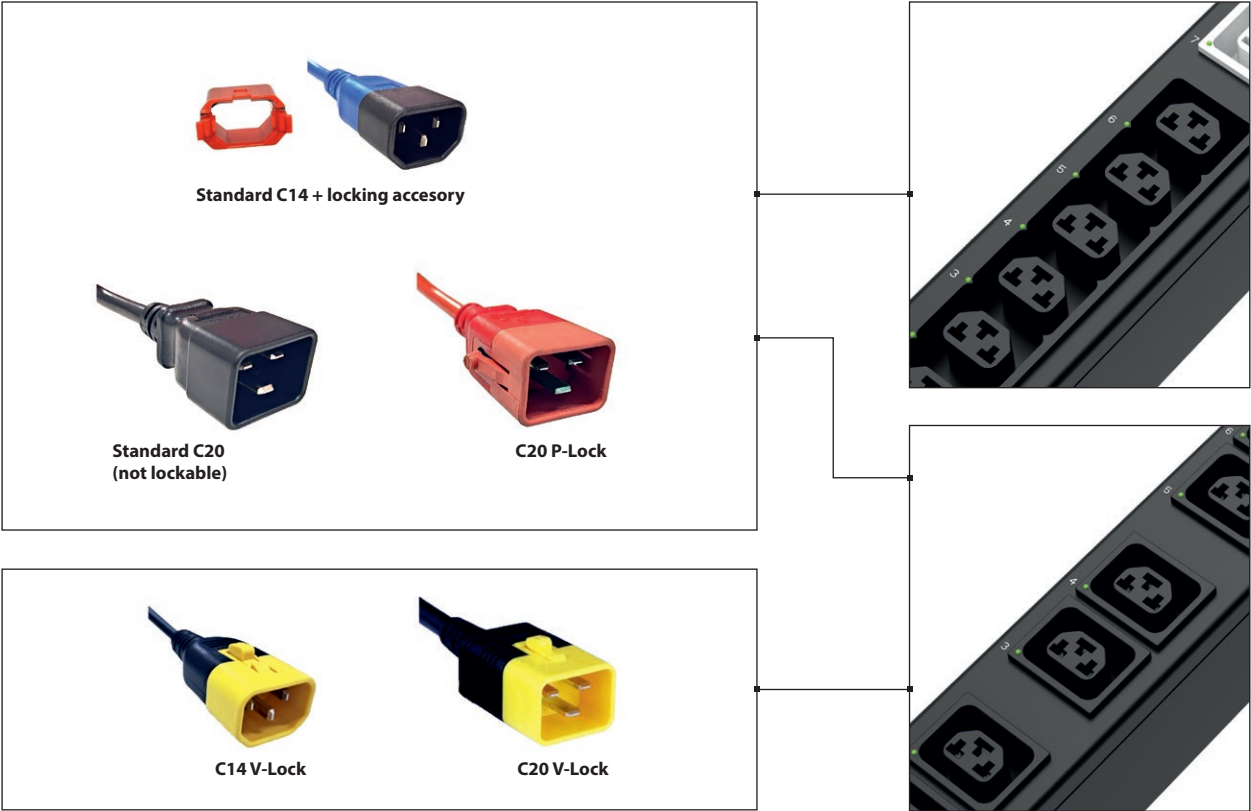

AVAILABLE CORDS

Plug – socket:

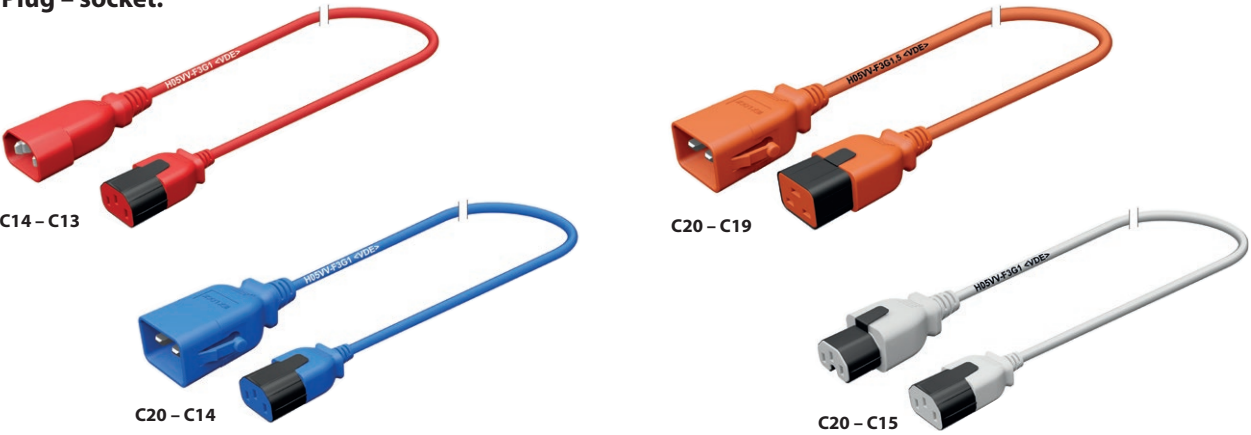

The cords are available in the following lengths and colors:
0.5 m, 1 m, 2 m, 3 m, 4 m,
white, black, red, blue, orange.

For more information, please contact the ZPAS sales department.


Smart PDU

ADVANCED POWER STRIPS

Sets of brackets for power strips assembly




Slip-on toolless brackets
Possibility to assemble in 4 positions



Toolless brackets with hooks
Possibility of smooth space regulation
of the brackets



Hooks for toolless assembly
Possibility of smooth space regulation
of the hooks



Screwed brackets
Possibility of smooth space regulation
of the brackets



POWER STRIPS **PDU**

ACCESSORIES FOR VERTICAL INSTALLATION OF POWER STRIPS

LZ fixing profile

Fixing profile for vertical installation of power strips in 800 mm wide **SZB IT** cabinets.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

LZ fixing profile with fixing accessories.

For cabinet height	Catalogue number	
	RAL 7035	RAL 9005
42 U	WZ-5367-52-03-011	WZ-5367-52-03-161
45 U	WZ-5367-52-02-011	WZ-5367-52-02-161
47 U	WZ-5367-52-01-011	WZ-5367-52-01-161

Package: 1 pc.



LZ fixing profiles



Server cabinet with power strips installed to LZ fixing profiles

LZ brackets

Brackets for vertical installation of power strips in **SRD** or **SRX** open racks.

Available in short version for 1 power strip and long for 2 power strips.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).

Scope of delivery

LZ bracket with fixing accessories.

LZ bracket version	Catalogue number	
	RAL 7035	RAL 9005
short	WZ-5367-53-01-011	WZ-5367-53-01-161
long	WZ-5367-53-02-011	WZ-5367-53-02-161

Package: 1 pc.



Short LZ bracket



Long LZ bracket



Open rack with power strips installed to LZ brackets

POWER SUPPLY SYSTEMS



MPSM-S1 Microprocessor Power Control Panel

The most important factors that determine the correct operation of modern automation, electronics, industrial computers and other devices are the correct power supply and the appropriate climatic conditions. These are necessary to ensure ongoing operation of priority infrastructure equipment – server room, data communication, power engineering.

MPSM-S1 is a programmable 19" panel for power supply, control, monitoring and recording. It provides voltage, power and current measurement for each socket, and also temperature and humidity measurement. The device is equipped with an unparalleled set of features that make it indispensable in data communication infrastructure. Also, MPSM-S1 is equipped with a 8 GB internal memory used for storing the measurement results, events, alarms which lasts for about 24 months of continuous recording.

USABLE FEATURES

- **SOFT-START – soft start of servers, cabinets, automation components, etc.**
Allows for defining individual power-up delays for individual panel sockets after power supply recovery or after activation of the SLAVE sockets. This allows you to set a dedicated power-up scenario for the entire set of devices powered from the MPSM-S1 panel.
- **MASTER-SLAVE – energy conservation**
Automatic shut-off of SLAVE sockets (devices) when the MASTER device (socket) is powered down. The level of energy consumption for the MASTER socket is constantly monitored by the power supply panel and when it exceeds the user-defined threshold, the SLAVE sockets are re-powered up. Powering up and down has also user-defined time delay. Each socket in MPSM-S1 panel can work in MASTER, SLAVE or NONE mode (excluding MASTER-SLAVE functionality). With this solution, you can change the configuration of the set powered from the MPSM-S1 panel without having to physically plug the devices to dedicated sockets (continuity of operation).
- **PDU-THERMOSTAT – multi-stage control of fans, heaters and air conditioners**
Each panel socket can be activated by the temperature on the basis of being above or below the user-defined value. Individual socket can also be activated by a signal below or above different set temperatures.
- **PDU-HYGROSTAT – multi-stage control of humidifiers and air dryers**
Each panel socket can be activated by humidity levels on the basis of being above or below the user-defined value. Individual socket can also be activated by a signal below or above set values.
- **Output control**
Allows for powering down any panel socket regardless of its mode and time.
- **Indication of alarm states:**
 - exceeded set value for current or underload of individual sockets
 - exceeded set value for current or underload of the entire set of connected receivers
 - grid voltage above or below the setpoints
 - ambient temperature above or below the setpoints
 - humidity above or below the setpoints
- **Device settings:**
 - hysteresis (ΔT) for thermostat
 - hysteresis (ΔH) for hygrostat
 - time delay for the MASTER-SLAVE function
 - load display mode power (VA) or current (A)
 - reset to factory defaults
- **On-line monitoring of:**
 - current and power for individual slots
 - current and overall joined power
 - mains voltage
 - temperature and humidity
- **Internal database for:**
 - recording of measurements, events, alarms
 - clock, calendar with battery backup
 - even 24 months of continuous recording
- **Ethernet Interface:**
 - data read and write via network (LAN/WAN)
 - remote on-line management and monitoring
 - SNMP, SNTP, DHCP
 - Windows® management application
- **Display settings**
Choosable content of display.

Thanks to the special technique used for creating the device software, all functions are executed in parallel. It means that while we're in menu editing settings, the device is working in the background, performing its status tasks and immediately responds to changes which have just been done or received measurements. After a power loss, the device will remember the last saved configuration. The clock and the calendar work even during prolonged power failure.

POWER SUPPLY SYSTEMS

MPSM-S1 MICROPROCESSOR POWER CONTROL PANEL

SCOPE OF DELIVERY

Product name	Package	Catalogue number
MPSM-S1 Microprocessor Power Control Panel		
Accessories supplied with the panel: power cord, temperature and humidity sensor with 1.8 m cable, two brackets for mounting the panel in a 19" cabinet along with fixtures (screws, washers, cage nuts), four rubber feet, cable management tray with a complete set of cable clips and fasteners, software with operating manual on a CD.	1 set	WZ-4994-01-00-161
Temperature and humidity sensor with 1.8 m cable (spare part)	1 pc.	T1Z-01-0045

TECHNICAL SPECIFICATIONS

Power input	Supply voltage	85-260 V AC
	Power consumption	30 W
	Frequency	50 Hz
	Maximum overall sockets current	16 A
Power output	Output voltage	85-260 V AC (supply voltage dependent)
	Maximum current for a single socket	10 A
Protections	Current	i(max) = 20 A continuous for 150 % i(max) shut-down in 1 h, for 200 % i(max) shut-down in 5–25 sec. for 300 % i(max) shut-down in 1.6–4.8 sec., parameters for the working temperature of 25 °C
Measurements	Voltage	Measuring range: 85-260 V AC Class: 2.5% (for sine waves) Resolution: 1 V Frequency of measurements: 1/sec.
	Socket currents 1-8	Measuring range: 0-16 A (sum), 0-10 A (socket) Resolution: 0.01 A Class: 5 % (for sine waves) ± 100 mA Frequency of measurements: series of 8 measurements/sec.
	Temperature	Measuring range: 0–85 °C Measuring error: typical ± 0.3 °C Resolution: 0.1 °C Frequency of measurements: 1/sec.
	Humidity	Measuring range: 0-100 %RH Measuring error: typical ± 2 % RH Resolution: 0.1 % RH Frequency of measurements: 1/sec.
	Frequency of measurements	One series of measurements/sec. (11 measurements/sec.)
Working conditions	Working temperatures	5-45 °C
	Working humidity	10-85 % (no condensation)
Casing	Dimensions	19" x 1U x 190 mm
	Weight	2.5 kg
	Protection class	IP 20

Note:

Due to the continuous construction development and changes of technical requirements, ZPAS S.A. reserves the right to change these parameters.

SOFTWARE FEATURES

In the era of globalization, data communication devices and people who manage them are often miles apart, while the devices themselves are scattered over great areas, creating locally smaller and larger systems. To make remote managing of data communication infrastructure with MPSM-S1 devices as convenient as possible, we created Windows-dedicated software. Using a built-in address book, the software connects to a specific MPSM-S1 device to perform configuration, retrieve and save data. This way, you can manage and control large systems from a single location. The application consists of tabs containing all the functions of the MPSM-S1. The first tab – DASHBOARD – is the instrument panel which contains the key parameters measured by the device. The panels include also the ARCHIVE tab with filters that you can use to download and view historical data, such as measurements, events, alarms, configuration changes.




You can generate as many windows with historical data as you want so you can compare the data in various configurations based on selected filters. Data can also be exported to a CSV file and then imported into Excel, for example. The application has a "back to the past" feature where you can select any point on the archives diagram to go back to that moment in time to see measurements, events, alarms and configuration. The data will be presented in the main application as if they were happening right at this moment. MPSM-S1 supports SNMP protocol in read mode. The software comes with an SNMP tree model as a MIB file which can be imported into your control systems. The device also supports TRAP, meaning it sends alarm and event notifications to predefined servers. Codes and descriptions of TRAPS are included with the software.

POWER SUPPLY SYSTEMS

MPSM-S1 MICROPROCESSOR POWER CONTROL PANEL

APPLICATION SCENARIO

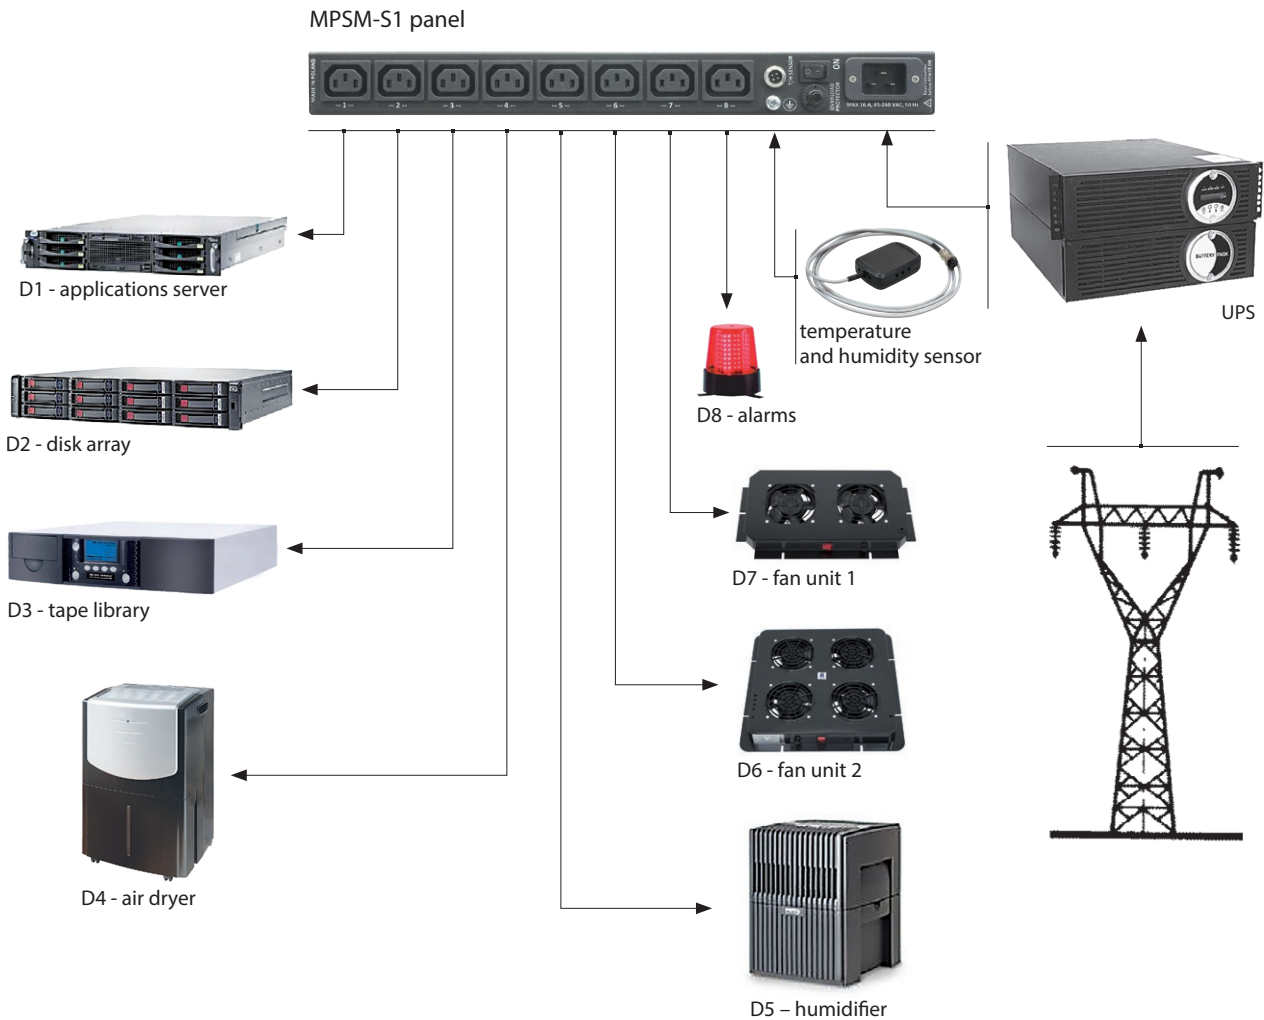

Example of programming the panel functions:

SOFT-START

Scenario for starting the devices after power supply recovery:

Time	Action
0 s	Power start
2 s	D6
4 s	D7
6 s	D8
8 s	D4
10 s	D5
12 s	D3
14 s	D2
90 s	D1

MASTER-SLAVE

Scenario for powering up Slave devices after powering up the Master device:
D1 - Master
D2, D3, D4 - Slave
T = 5 s (delay time for powering down and up the Slave devices)
I = 0,5 A (current drawn from the Master slot; below this value, the Master device is regarded as powered-down)

THERMOSTAT/ HYGROSTAT

Scenario for powering up cooling, humidifying and drying devices in the case of exceeding programmed temperature and humidity thresholds:
D4: RH_{max} = 80 %
D5: RH_{min} = 20 %
D6: t_{max} = 25 °C
D7: t_{max} = 27 °C
D8: t_{max} = 32 °C
RH_{min} = 15 %

INTERNAL ALARMS

Load alarms
D1: I_{min} = 0,1 A
Temperature alarms
T_{max} = 35°C
Voltage alarms
U_{max} = 250 V
U_{min} = 207 V
If the current, temperature or voltage values are outside preset thresholds, the internal panel alarm will be signalled (sound signal and a flashing message on the display).

POWER SUPPLY SYSTEMS

MPSM-S1 MICROPROCESSOR POWER CONTROL PANEL

SCENARIO DESCRIPTION

The MPSM-S1 device supports the cabinet holding set of devices operating within one logical solution, UPS, main ventilation panel, auxiliary ventilation panel, humidifier, air dryer and alarms. The logical solution should be understood as a set of interdependent devices, each of which is necessary for proper operation of the whole. In such a case, the appropriate set power-up scenario is extremely important. For example, when the server is turned on faster than the disk array, then it will not detect the disk array at the time of checking the readiness of individual devices and thus the entire system may fail to start. In this scenario, the server is switched on as the last the device with an additional time delay. Then you can be sure that all of its peripherals (disk array, tape library, etc.) are ready to work and will return ready-to-use during data bus scanning. Furthermore, when the main device of the system is turned off, the other devices do not have to be working any longer.




In this configuration, the MPSM-S1 ensures the following:

- correct scenario for powering up the devices
- a device dependent on the master server is disconnected after the DeltaMS time, when the server is remotely or physically switched off
- maintaining constant temperature by controlling the ventilation panel, and in the next step, when the temperature continues to rise, powering up the auxiliary ventilation panel
- maintaining constant humidity in a room by switching the humidifier on when RH humidity drops below 20 %, and switching the air dryer on when RH humidity rises above 80 %
- MPS M-S1 alarm and external alarm (alarm lamp) when the MPS M-S1 have exhausted all measures and is no longer able to maintain the correct ambient temperature or humidity
- MPSM-S1 alarm when the server is disconnected or shuts down by itself due to a failure or other actions
- supply voltage level control and MPSM-S1 alarm when the value of this voltage exceeds the allowable limits
- on-line visualization of temperature, humidity, supply voltage or currents on each of the slots, and their overall values from all slots; all on the LC D display


Note:

The parameter values used in the scenario are merely illustrative and may vary from those in specific real systems.

MONITORING AND CONTROL SYSTEM BASED ON MPSM-S1 DEVICES

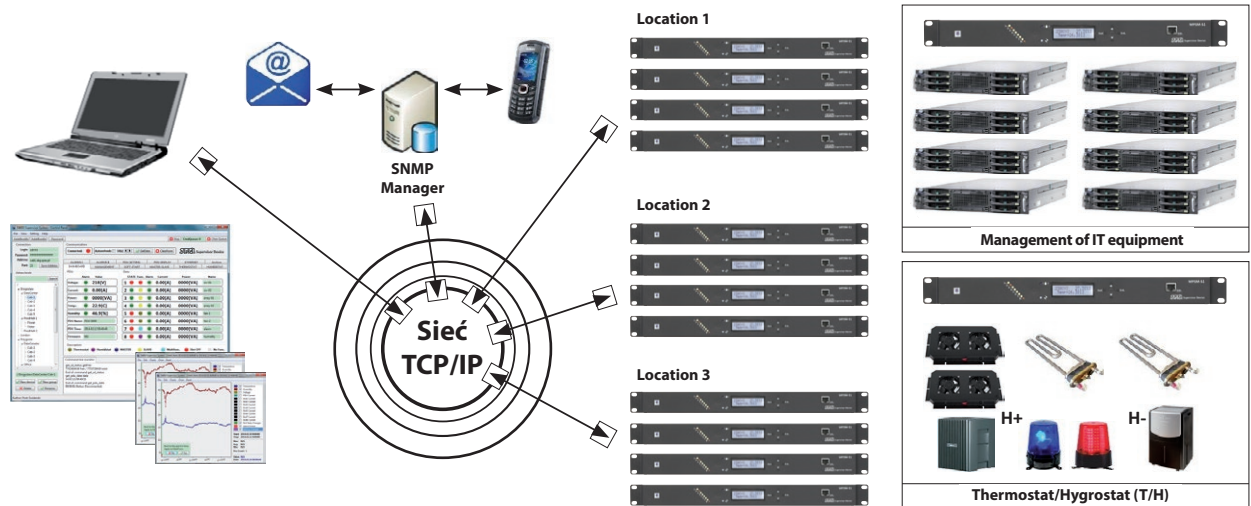

POWER SUPPLY SYSTEMS

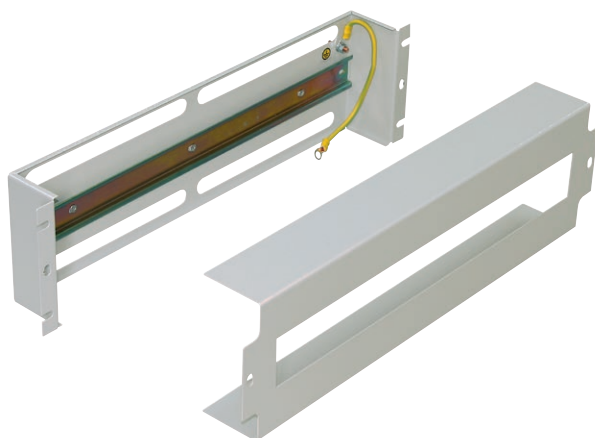**Voltage distribution panel**

Universal 19" enclosure for modular devices.
In the standard version equipped with DIN rail and housing with 402.5 x 45.5 mm opening.

Dimensions

- height: 133 mm (3 U),
- width: 19" (internal width: 446 mm),
- depth: 60 mm

Capacity of panel - maximum number of built-in S-type modules (width of module 17.5 mm): 22 pcs.

Material

Sheet steel powder painted in light grey (RAL 7035) or black (RAL 9005).


Scope of delivery

In the standard version, panels are sold as empty enclosures, complete with: mounting base, DIN rail, housing, fixing accessories.


Package	Colour	Catalogue number
1 pc.	RAL 7035	WZ-PS3U-00-00-011
	RAL 9005	WZ-PS3U-00-00-161

Voltage distribution panels equipped with electrical equipment

On special order, we also produce panels of other overall dimensions and equipped with electrical equipment according to the customer's wishes.

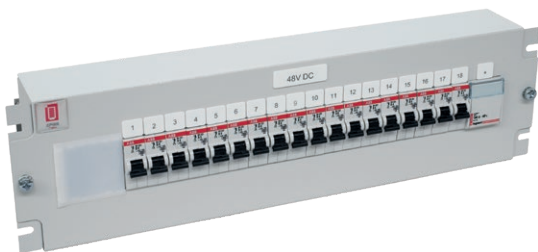

PS-3U panel equipped with 48 V circuit breakers

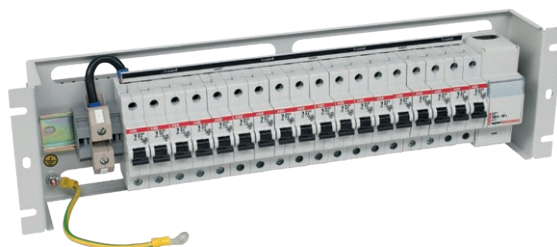**PRS-3U panel for supplying power to appliances requiring high reliability of 230 V power supply**


It contains two three-phase sections, powered for each phase separately by Powercon NAC3 sockets with a maximum load capacity of 20 A. Each phase is equipped with a lamp indicating the presence of voltage from the power supply side. The number and power of the appliances can be adjusted to the customer's needs within the total allowable power of 4500 VA per phase. To connect appliances, you can use C13 sockets with an interlock in the maximum number of 24 pcs. A maximum of 15 S-type overcurrent circuit breakers can be used to protect the outgoing feeders.

Technical parameters: rated voltage $U_n = 2 \times 400 / 230 \text{ V}$

rated current for ingoing feeders $I_n = 20 \text{ A}$

number and rated current for outgoing feeders = max. 24 pcs. with current according to customer's needs, max 4500 VA/phase

COMPREHENSIVE SOLUTIONS FOR DATA CENTRES

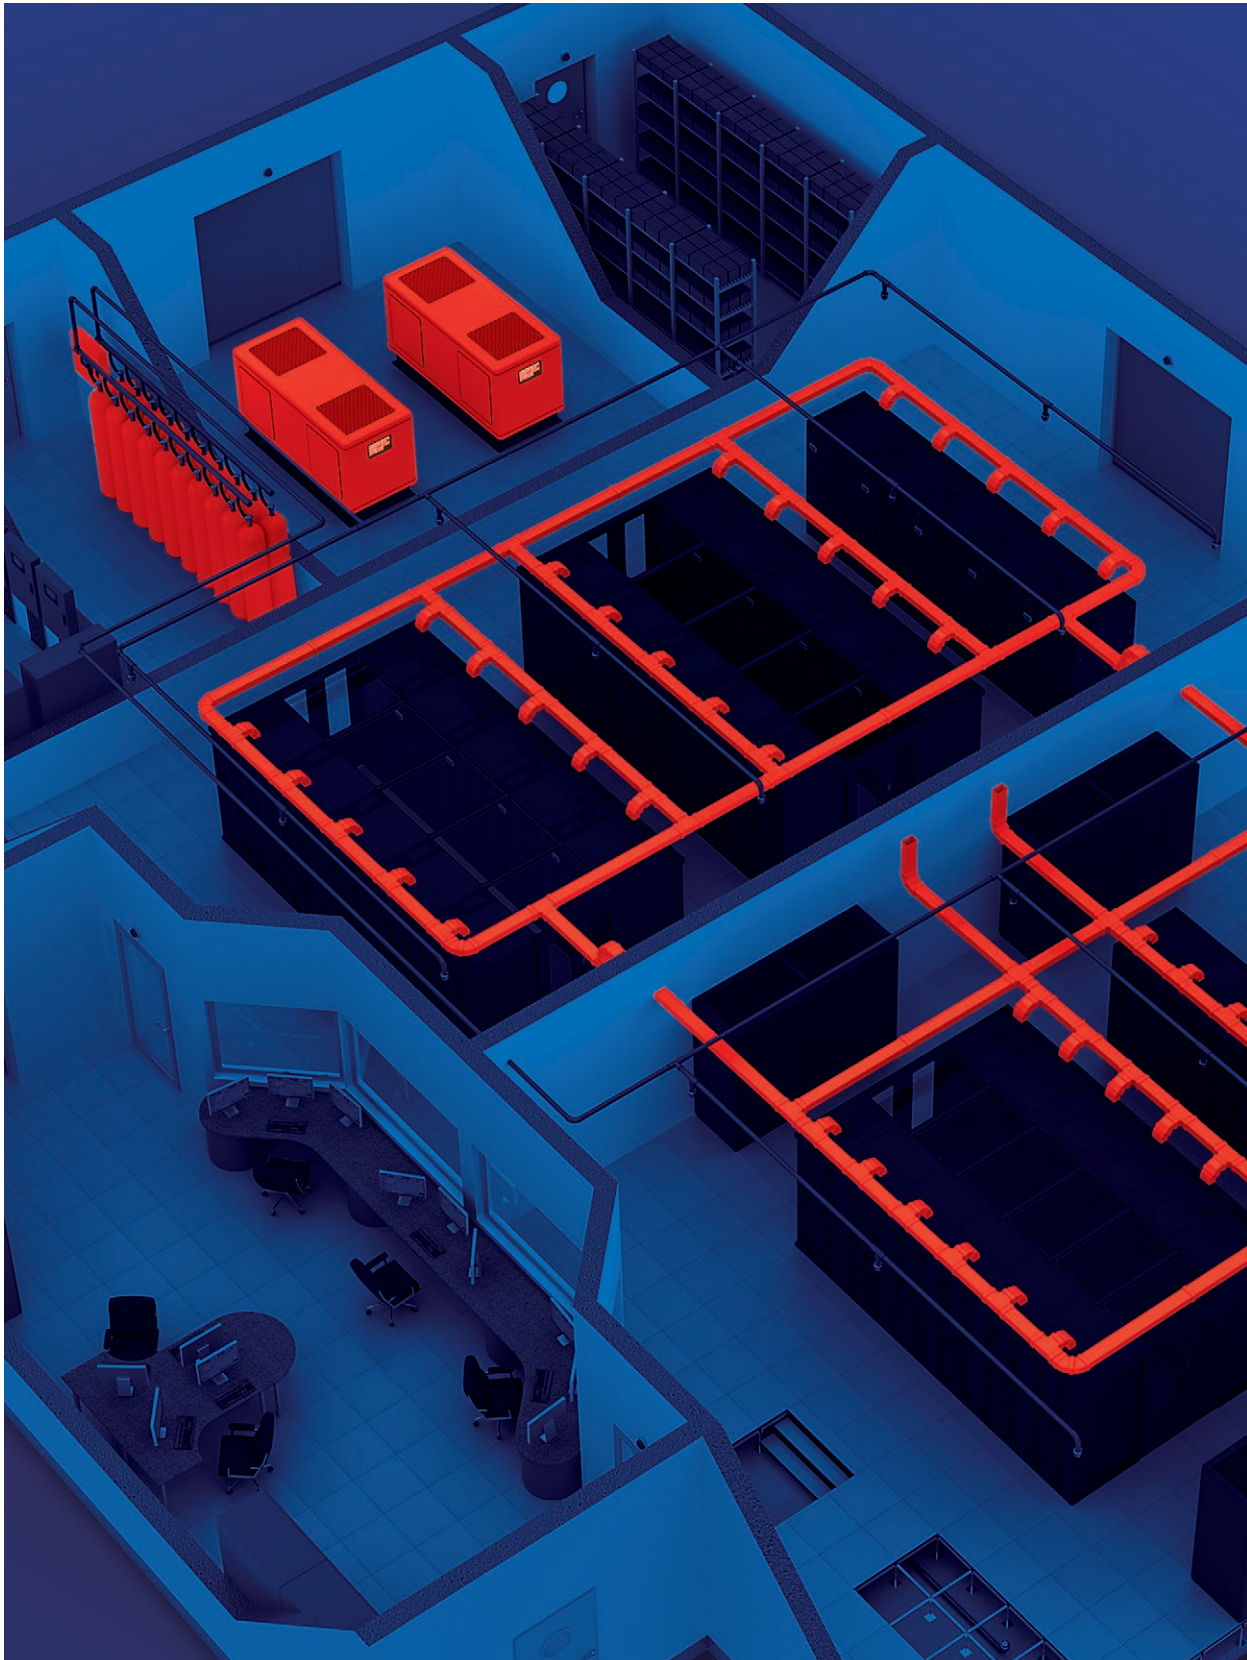


COMPREHENSIVE SOLUTIONS FOR DATA CENTRES

COMPREHENSIVE SOLUTIONS FOR DATA CENTRES

ZPAS provides data centres with comprehensive solutions, including:


- concepts (solution proposals including visualizations), basic and detailed designs (including all approvals and permits), project execution,
- primary and backed-up power supply systems,
- sanitary, air-conditioning and ventilation systems,
- telecommunication systems (access control, CCTV, burglary and robbery alarm, monitoring of environmental conditions),
- structured cabling systems,
- fire protection systems,
- network and server cabinets:
 - Data Box installations,
 - air flow management,
 - cable management,
 - power strips.

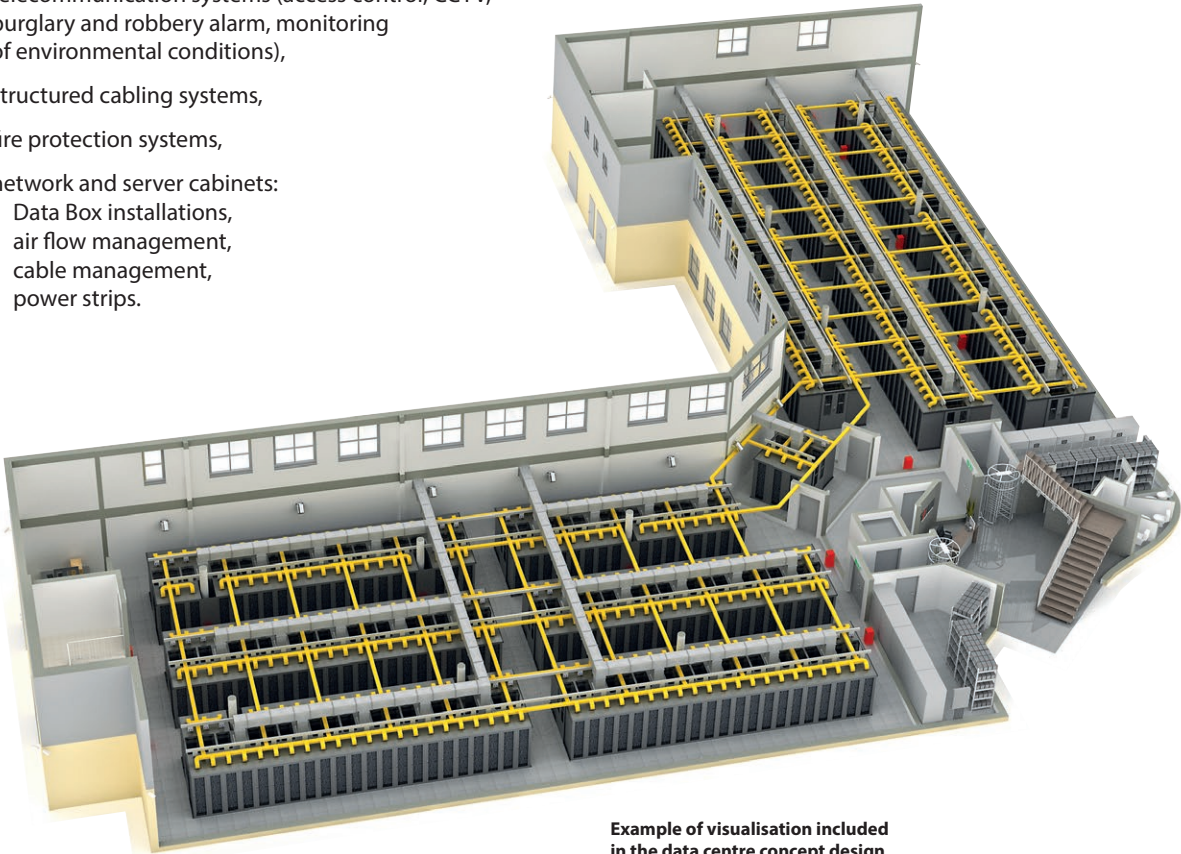

Example of visualisation included in the data centre concept design




EXAMPLES OF SERVER ROOMS PROJECTS WITH ZPAS CABINETS

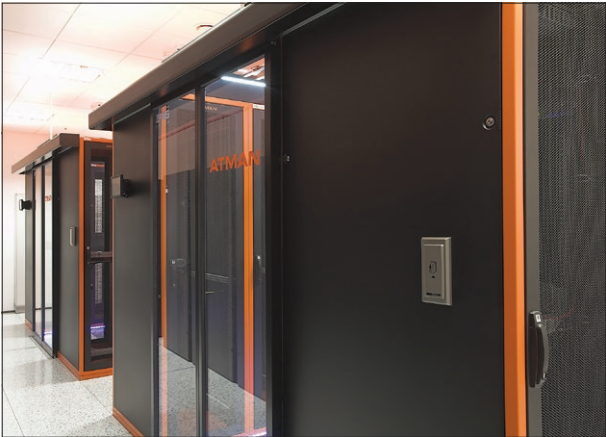

EXAMPLES OF SERVER ROOMS PROJECTS WITH ZPAS CABINETS



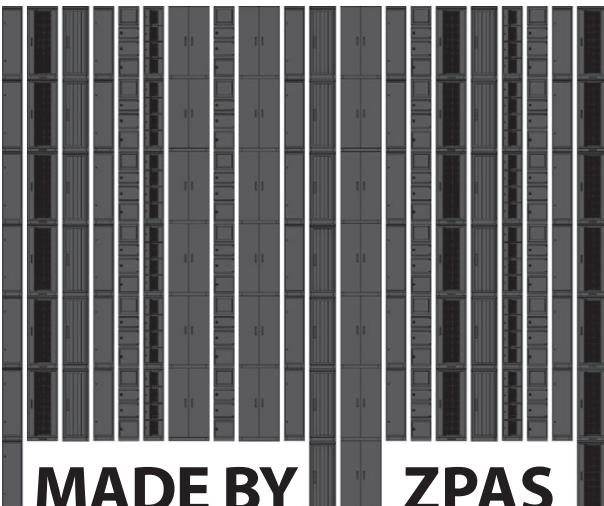

PL MADE BY ZPAS 22

Catalogue of ZPAS Group Products
Data Communication Solutions
Edition: 06.2022 EN

Published by:
ZPAS S.A., Przygórze 209, 57-431 Wolibórz, Poland

We reserve the right to modernise and modify our products.
Technical modifications shall not affect product functionality.
Misprints and errors of content that may be found in this
catalogue may not be used as a basis for complaints.



ZPAS S.A.
PRZYGÓRZE 209 · 57-431 WOLIBÓRZ · POLAND
PHONE: +48 74 872 01 00