

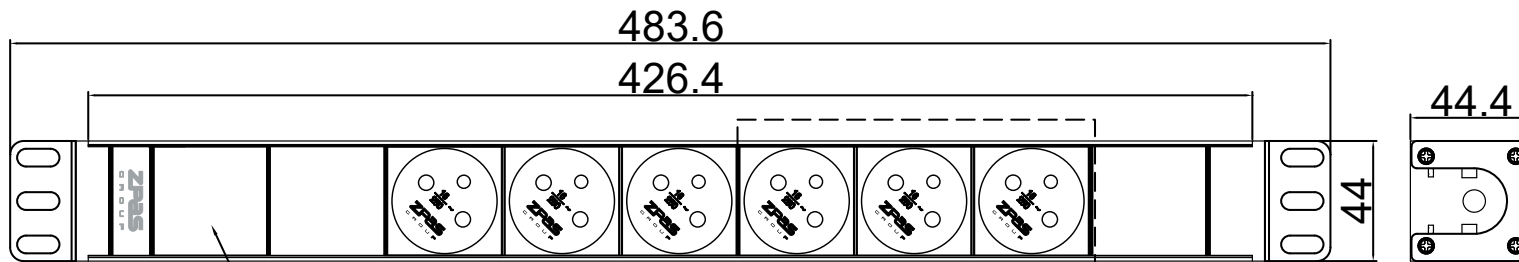


Copyright 2023 -

RoHS Compliant

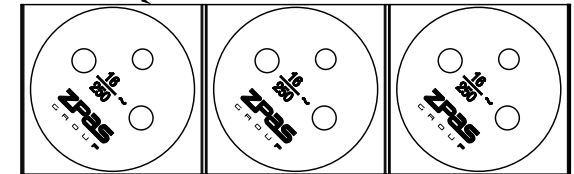


Using 3x2WAGO connector
make the wire longer for wiring

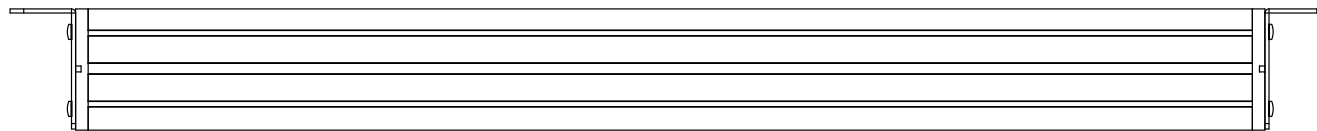

2 Metal bracket and 8 M3x8 screws



4 cage nut M6 + 4 screw 6X14mm + 4 washers in a polybag



Basic Series	OUTPUT	OPERATING TEMPERATURE
All Plastic In Grey RAL7035 PP	(6) UTE NF C61-314 In Grey RAL7035	0° to 60°C
INPUT	BRANCH CIRCUITS	MOUNTING ACCESORIES
190-250VAC 16A 50HZ No cable		(2) Metal bracket and 8 M3x8 screws

Revisions		
Rev	Description	Date

DRAWING TYPE  (NO PERMISSION.NO CHANGING)		WZ-LZ-B11606UTES/0M	
unit=mm		Housing	Aluminium
TECHNICAL STANDARD 1.IT11; 2.NO RUST 3.NO FLAW ON THE SURFACE			Silver Anodize
FILLET	R0.5	Zpas	
ANGLE	±0.5°		
FIRST ANGLE 			
		DATE 18-04-2023	