



| FEATURES                                                                                                                                                                                                                                                                                                                                             |                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| Technology                                                                                                                                                                                                                                                                                                                                           | Basic                                                         |
| Energy Metering                                                                                                                                                                                                                                                                                                                                      | No                                                            |
| Metering per Input Line                                                                                                                                                                                                                                                                                                                              | No                                                            |
| Metering per Output Receptacle                                                                                                                                                                                                                                                                                                                       | No                                                            |
| Remote Outlet Switching                                                                                                                                                                                                                                                                                                                              | No                                                            |
| Ethernet Port                                                                                                                                                                                                                                                                                                                                        | No                                                            |
| Networking Protocols                                                                                                                                                                                                                                                                                                                                 | No                                                            |
| PDU Cascading                                                                                                                                                                                                                                                                                                                                        | No                                                            |
| Power Share                                                                                                                                                                                                                                                                                                                                          | No                                                            |
| Display                                                                                                                                                                                                                                                                                                                                              | No                                                            |
| Residual Current Monitoring                                                                                                                                                                                                                                                                                                                          | No                                                            |
| USB Ports                                                                                                                                                                                                                                                                                                                                            | No                                                            |
| Environmental Sensors                                                                                                                                                                                                                                                                                                                                | No                                                            |
| INPUT                                                                                                                                                                                                                                                                                                                                                |                                                               |
| Plug                                                                                                                                                                                                                                                                                                                                                 | IEC 60309 1P+N+E 6h 32A 250V SINGLE PHASE                     |
| Lead Length                                                                                                                                                                                                                                                                                                                                          | 3 meter                                                       |
| Cable Type                                                                                                                                                                                                                                                                                                                                           | H07RN-F3G4.0 mm <sup>2</sup>                                  |
| Max. Input Load                                                                                                                                                                                                                                                                                                                                      | 32A                                                           |
| Rated Input Voltage                                                                                                                                                                                                                                                                                                                                  | 190-250V Single phase                                         |
| Frequency                                                                                                                                                                                                                                                                                                                                            | 50-60Hz                                                       |
| Power Capacity                                                                                                                                                                                                                                                                                                                                       | 7360W                                                         |
| OUTPUT                                                                                                                                                                                                                                                                                                                                               |                                                               |
| Rated Output Voltage                                                                                                                                                                                                                                                                                                                                 | 190-250V Single phase                                         |
| Output Types                                                                                                                                                                                                                                                                                                                                         | 36 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified |
| Overload Protection                                                                                                                                                                                                                                                                                                                                  | (2) 1 Pole Carling 16A L31-X1-00-445-H62-D3                   |
| CHASSIS                                                                                                                                                                                                                                                                                                                                              |                                                               |
| Dimensions (W x D x H)                                                                                                                                                                                                                                                                                                                               | 1372 x 55 x 55.4 mm                                           |
| Color                                                                                                                                                                                                                                                                                                                                                | RAL 9004 black powder coat                                    |
| Mounting Options                                                                                                                                                                                                                                                                                                                                     | 4 mounting options (see page 2)                               |
| Required Torque for Mounting Screws                                                                                                                                                                                                                                                                                                                  | ≥2.54N·m (25.9kgf·cm or 22.4 in·lbs)                          |
| OPERATING ENVIRONMENT                                                                                                                                                                                                                                                                                                                                |                                                               |
| Temperature Range                                                                                                                                                                                                                                                                                                                                    | 0° to 60° C (30° to 140° F)                                   |
| Humidity                                                                                                                                                                                                                                                                                                                                             | 0 - 95 %                                                      |
| Elevation                                                                                                                                                                                                                                                                                                                                            | 0 - 4000 Meters                                               |
| CONFORMANCE                                                                                                                                                                                                                                                                                                                                          |                                                               |
| IEC 62368-1 (Third Edition)                                                                                                                                                                                                                                                                                                                          |                                                               |
|     |                                                               |













C13 Lock Part







VIEW A


### Toolless Mounting Buttons with Removable 90° Rotation Brackets



| Chassis Color | Code           |
|---------------|----------------|
| Black         | Standard color |
| White         | W              |
| Red           | R              |
| Blue          | A              |
| Green         | G              |
| Orange        | O              |
| Grey          | GY             |
| Yellow        | Y              |

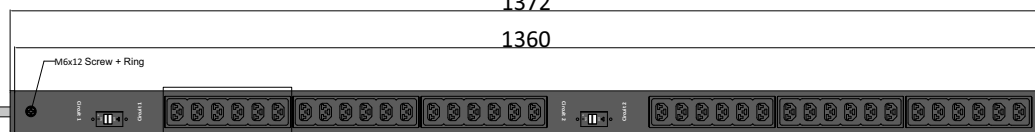 $\angle_{\text{VIEWA}}$ 

VIEW B:

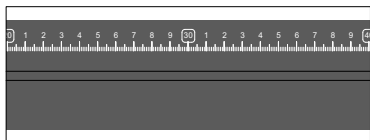

Packing content:

IEX Lock-VP



X36

|                                                                                                                      |       |                                                                                       |                      |
|----------------------------------------------------------------------------------------------------------------------|-------|---------------------------------------------------------------------------------------|----------------------|
| DRAWING TYPE                                                                                                         |       | WZ-LZ-B13236IEX                                                                       |                      |
| <br>(NO PERMISSION.NO CHANGING) |       |                                                                                       |                      |
| unit=mm                                                                                                              |       | Housing                                                                               | Aluminium            |
| TECHNICAL STANDARD<br>IT11;<br>NO RUST<br>NO FLAW ON THE SURFACE                                                     |       |                                                                                       | Black Powder Coating |
|                                                                                                                      |       |                                                                                       | RAL9004              |
|                                                                                                                      |       |                                                                                       |                      |
| FILLET                                                                                                               | R0.5  |  |                      |
| ANGLE                                                                                                                | ±0.5° |                                                                                       |                      |
| FIRST ANGLE<br>                 |       |                                                                                       |                      |
|                                                                                                                      |       | DATE 11-07-2022                                                                       |                      |

ZPAS

DATE 11-07-2022

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

# IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



**C14 - C13 Sleeve**

H05VV-F3G1 mm<sup>2</sup>

| Color | 0,5M | 1M | 2M |
|-------|------|----|----|
| Black | ✓    | ✓  | ✓  |
| Red   | ✓    | ✓  | ✓  |
| Blue  | ✓    | ✓  | ✓  |



**C14PLOCK - C13 Sleeve**

H05VV-F3G1 mm<sup>2</sup>

| Color | 0,5M | 1M | 2M |
|-------|------|----|----|
| Black | ✓    | ✓  | ✓  |
| Red   | ✓    | ✓  | ✓  |
| Blue  | ✓    | ✓  | ✓  |



**C20PLOCK - C19 Sleeve**

H05VV-F3G1,5 mm<sup>2</sup>


| Color | 1M | 2M |
|-------|----|----|
| Black | ✓  | ✓  |
| Red   | ✓  | ✓  |
| Blue  | ✓  | ✓  |



**C20PLOCK - C13 Sleeve**

H05VV-F3G1 mm<sup>2</sup>

| Color | 1M | 2M |
|-------|----|----|
| Black | ✓  | ✓  |
| Red   | ✓  | ✓  |
| Blue  | ✓  | ✓  |

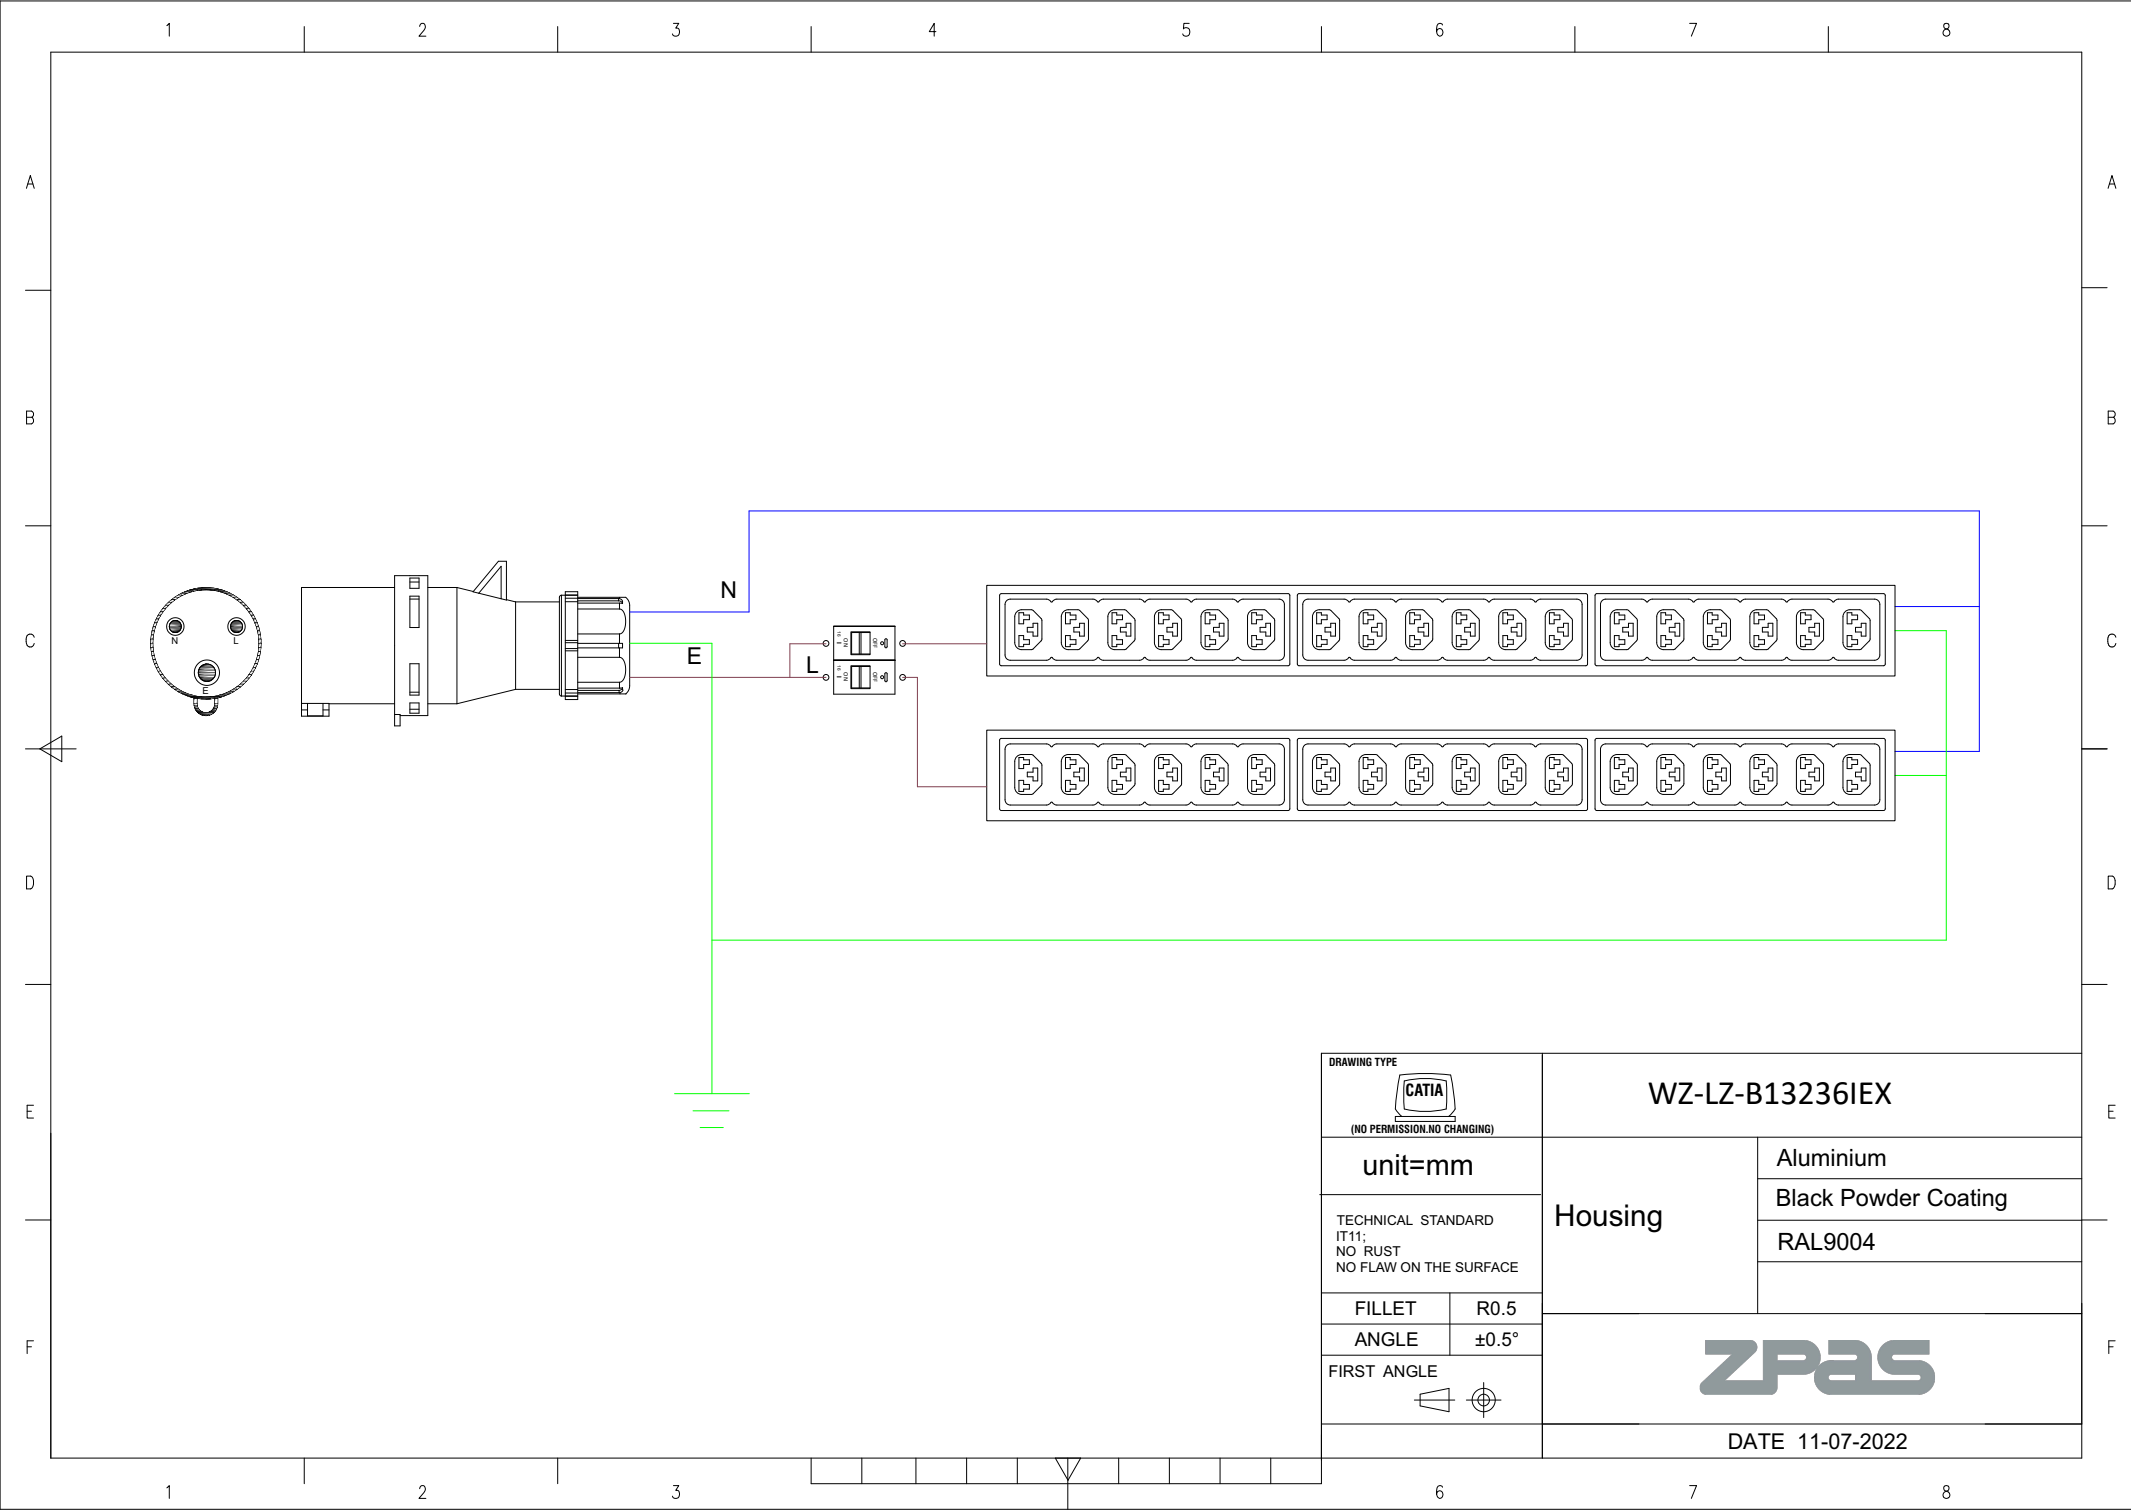

|                                                                   |       |                            |                      |
|-------------------------------------------------------------------|-------|----------------------------|----------------------|
| DRAWING TYPE                                                      |       | WZ-LZ-B13236IEX            |                      |
| <div><div>CATIA</div><div>(NO PERMISSION.NO CHANGING)</div></div> |       |                            |                      |
| unit=mm                                                           |       | Housing                    | Aluminium            |
| TECHNICAL STANDARD<br>IT11;<br>NO RUST<br>NO FLAW ON THE SURFACE  |       |                            | Black Powder Coating |
|                                                                   |       |                            | RAL9004              |
|                                                                   |       |                            |                      |
| FILLET                                                            | R0.5  | <div>ZPAS</div>            |                      |
| ANGLE                                                             | ±0.5° |                            |                      |
| FIRST ANGLE                                                       |       |                            |                      |
| <div><div></div><div></div></div>                                 |       | <div>DATE 11-07-2022</div> |                      |
|                                                                   |       |                            |                      |