




FEATURES	
Technology	PM (Power Meter)
Energy Metering	Voltage(V), Current(A), Active Power(kW), Power Factor, kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1%
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	4 Digital-7 Segment Display LED
Residual Current Monitoring	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC 60309 1P+N+E 6h 32A 250V SINGLE PHASE
Lead Length	3 meter
Cable Type	H07RN-F3G4.0 mm ²
Max. Input Load	32A
Rated Input Voltage	190-250V Single phase
Frequency	50-60Hz
Power Capacity	7360W
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	18 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(2) 1 Pole Carling 16A L31-X1-00-445-H62-D3
CHASSIS	
Dimensions (W x D x H)	1012 x 55 x 55.4 mm
Color	RAL 9004 black powder coat
Mounting Options	4 mounting options (see page 2)
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf-cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	
   	

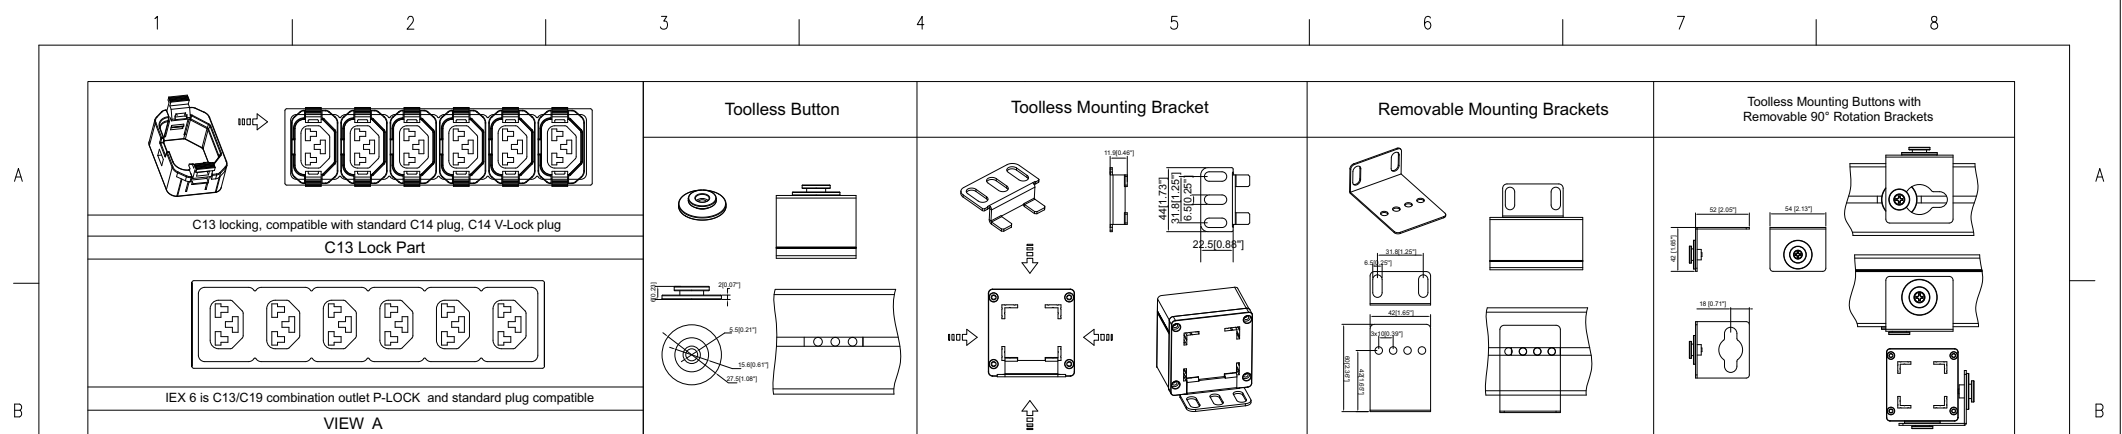

Chassis Color	Code
Black	Standard color
White	W
Red	R
Blue	A
Green	G
Orange	O
Grey	GY
Yellow	Y

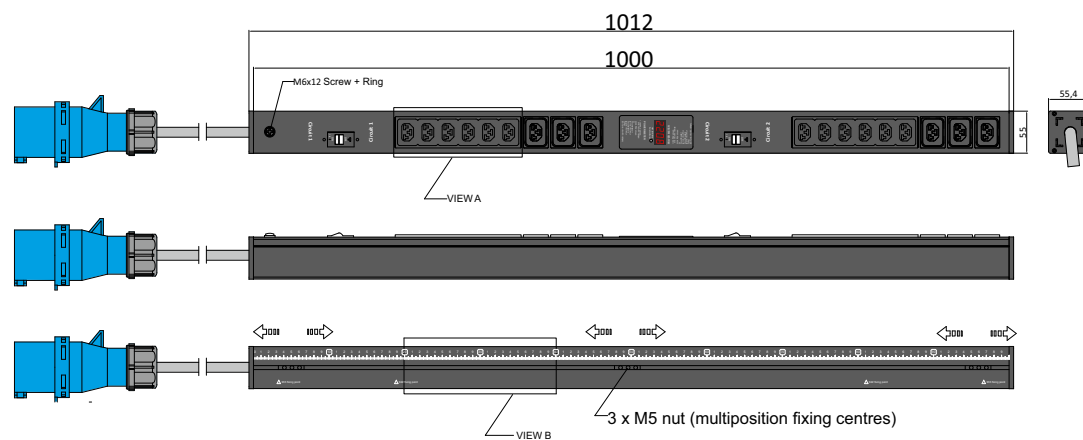

VIEW B:

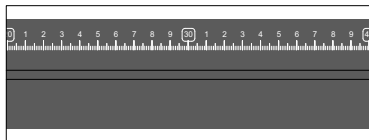

Basic Series (1)Power Meter	OUTPUT (18) IEX (C13/C19) combo Black (Max rate 16A)	OPERATING TEMPERATURE 0° to 60°C				(NO PERMISSION.NO CHANGING)		Housing	Aluminium
						unit=mm			Black Powder Coating
						TECHNICAL STANDARD IT11: NO RUST NO FLAW ON THE SURFACE			RAL9004
INPUT 190-250VAC 32A 50HZ IEC60309 32A 1P+N+E Plug 3m H07RN-F3G4.0mm ² Power Lead	BRANCH CIRCUITS (2) 1 Pole Carling 16A L31-X1-00-445-H62-D3	MOUNTING ACCESORIES (2) Toolless Button (2) Toolless Mounting Bracket (2) Removable Mounting Brackets (2) Toolless Mounting Buttons with Removable 90° Rotation Brackets	Revisions	Rev	Description	Date	FILLET	R0.5	
							ANGLE	±0.5°	
							FIRST ANGLE		
									DATE 14-07-2022

Packing content:

IEX Lock-VP  X18



X18

DRAWING TYPE		WZ-LZ-PM13218IEX	
 (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	Aluminium
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			Black Powder Coating
			RAL9004
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE 			
		DATE 14-07-2022	

ZPAS

DATE 14-07-2022

1

2

3

6

8

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C20PLOCK - C19 Sleeve

H05VV-F3G1,5 mm²


Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓



C20PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

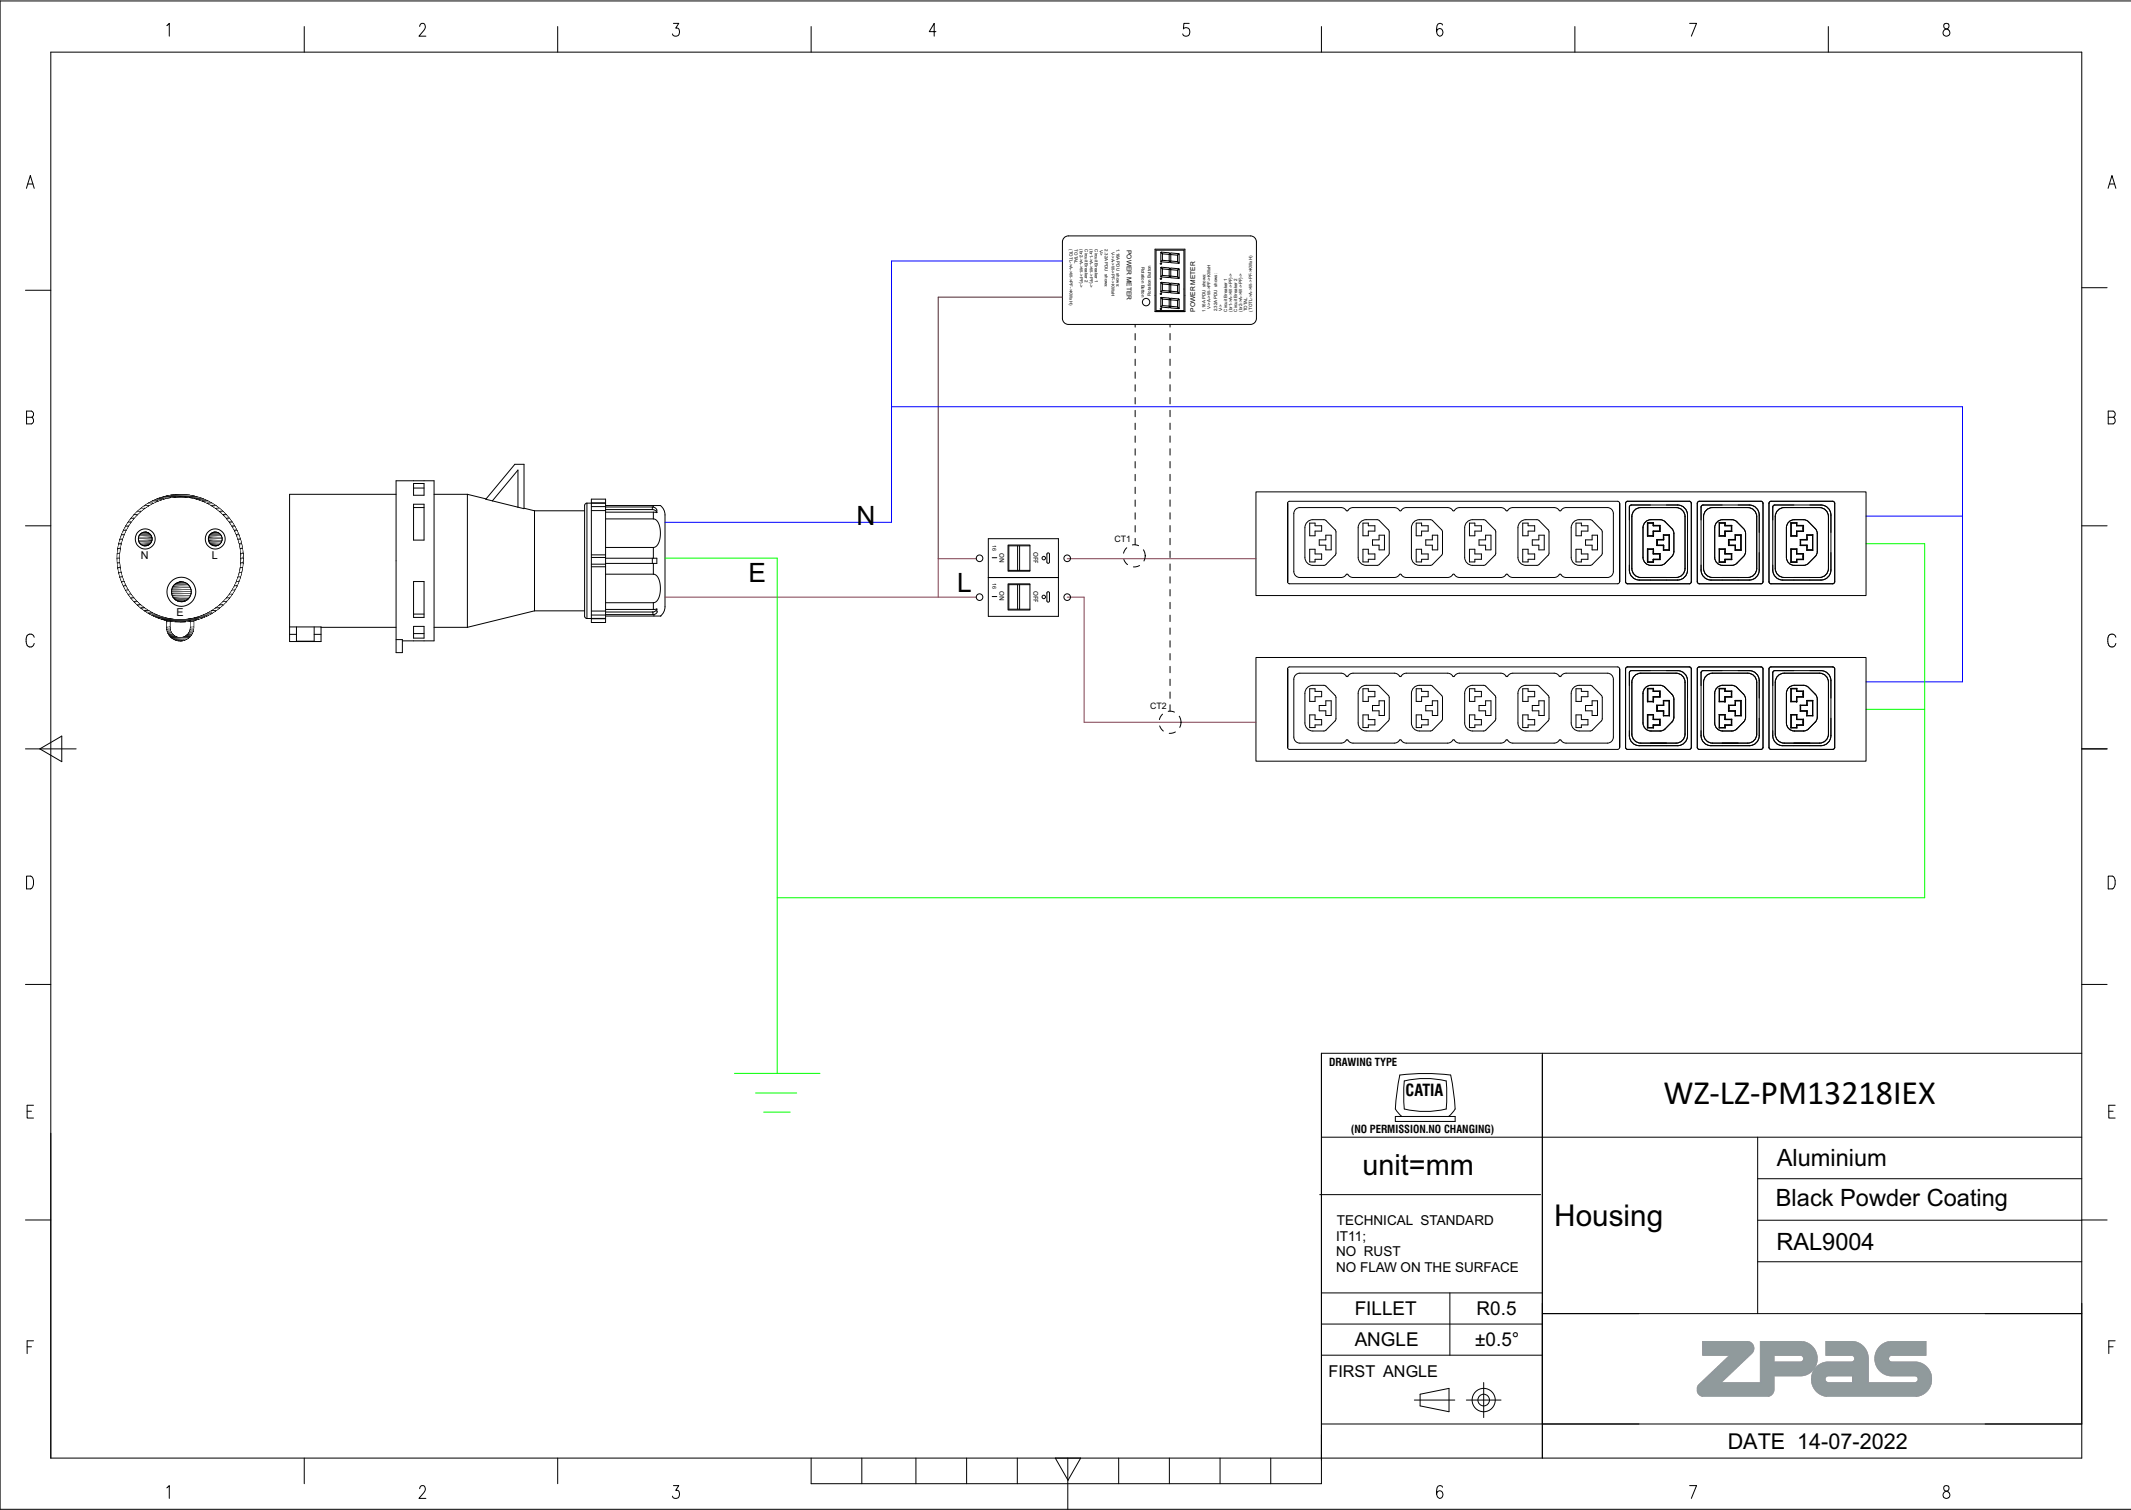

DRAWING TYPE		WZ-LZ-PM13218IEX	
 (NO PERMISSION.NO CHANGING)			
unit=mm		Housing	Aluminium
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			Black Powder Coating
			RAL9004
FILLET	R0.5		
ANGLE	±0.5°		
FIRST ANGLE			
			
		DATE 14-07-2022	