


FEATURES	
Technology	PIM (Per Inlet Monitoring)
Energy Metering	Voltage(V), Current(A), Active Power(W), Apparent Power (VA), Reactive Power (var), PF, Frequency(Hz), kWh
Metering per Input Line	Yes (Branch Circuit and Total Current) Accuracy 1%
Metering per Output Receptacle	No
Remote Outlet Switching	No
Ethernet Port	2 Gigabit Ethernet ports to acces the PDU from 2 different networks
Networking Protocols	DHCP, IPv4 and IPv6, DNS, http / https, SSHv.2, SNMP v1 / v2c / v3, SNMP TRAPS / SETS / GETS, SMTP, Modbus , Telnet, TCP, RADIUS, Syslog, TLS 1.2, SNTP, ARP, ICMP, ICMPv6, UDP, NDP
PDU Cascading	16 PDUs
Power Share	Yes
Network Controller	Replaceable Hot Swapable controller with 4 button OLED display
Residual Current Monitoring	No (optional)
Rack Acces Control	Compatible with DCIM solutions
USB Ports	2 USB A ports WiFi networking,webcam,PDU configuration and mobile interface
Environmental Sensors	All in one Temperature and Humidity sensor with 2 digital inputs (for connect air flow, door sensor, water leak, smoke detector and Vibration sensor) plug and play bus allows to connect 8 EMD devices in one PDU
INPUT	
Plug	IEC 60309 1P+N+E 6h 32A 250V SINGLE PHASE
Lead Length	3 meter
Cable Type	H07RN-F3G4.0 mm ²
Max. Input Load	32A
Rated Input Voltage	190-250V Single phase
Frequency	50-60Hz
Power Capacity	7360W
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	12 IEX (C13/C19) combo (Max rate 16A) EN61984+UL498 certified
Overload Protection	(2) 1 Pole Magnetic Hydraulic CB 16A
CHASSIS	
Dimensions (W x D x H)	482.8 x 44 x 160 mm
Color	RAL 9004 black powder coat
Mounting Options	(2) Metal bracket
Required Torque for Mounting Screws	≥2.54N·m (25.9kgf·cm or 22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0° to 60° C (30° to 140° F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CONFORMANCE	
IEC 62368-1 (Third Edition)	
   	

A horizontal timeline with 8 numbered points (1 to 8) and vertical lines indicating transitions between them.




C13 locking, compatible with standard C14 plug, C14 V-Lock plug

C13 Lock Part



The front panel of the H3C S5130-52P switch features a variety of ports and a central display. On the left, there are two RJ45 ports labeled 'F0/1 Console' and 'F0/2 Console'. In the center, there are two USB ports labeled 'USB-A' and 'USB-B', and a 'SFP' (Small Form-factor Pluggable) port. To the right of the SFP port is a 'Reset' button. Further right is a large LCD display showing system information: 'H3C S5130-52P', 'Ver. V200R001C00', 'Model: S5130-52P', 'Serial: 10000000000000000000', and 'MAC: 0000-0000-0000'. On the far right, there are two RJ45 ports labeled 'F0/24 Console' and 'F0/25 Console'.

160

A detailed line drawing of a mechanical device, possibly a pump or engine component. It features a rectangular body with a control panel on the right side containing four circular gauges and a rectangular display. On the left side, there are several ports and valves, some of which are labeled with letters like 'A', 'B', 'C', 'D', 'E', 'F', 'G', 'H', 'I', 'J', 'K', 'L', 'M', 'N', 'O', 'P', 'Q', 'R', 'S', 'T', 'U', 'V', 'W', 'X', 'Y', 'Z'. The device is mounted on a base with a central support structure.

IEX Lock-VP



X12 Red

—VIEW A

Revisions		
Rev	Description	Date

A horizontal number line is shown with tick marks labeled 1, 2, 3, 4, 5, 6, 7, and 8. Above the line, a horizontal bracket spans from the tick mark for 4 to the tick mark for 6.

- Low cost locking solution at both ends
- Different colors available
- Patented IEX locking system
- Locking sleeve for C13 and C19 plugs
- VDE, UL approved

IEX PATENTED LOCKING SOCKET - POWER CORD SOLUTION



C14 - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C14PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	0,5M	1M	2M
Black	✓	✓	✓
Red	✓	✓	✓
Blue	✓	✓	✓



C20PLOCK - C19 Sleeve

H05VV-F3G1,5 mm²


Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓



C20PLOCK - C13 Sleeve

H05VV-F3G1 mm²

Color	1M	2M
Black	✓	✓
Red	✓	✓
Blue	✓	✓

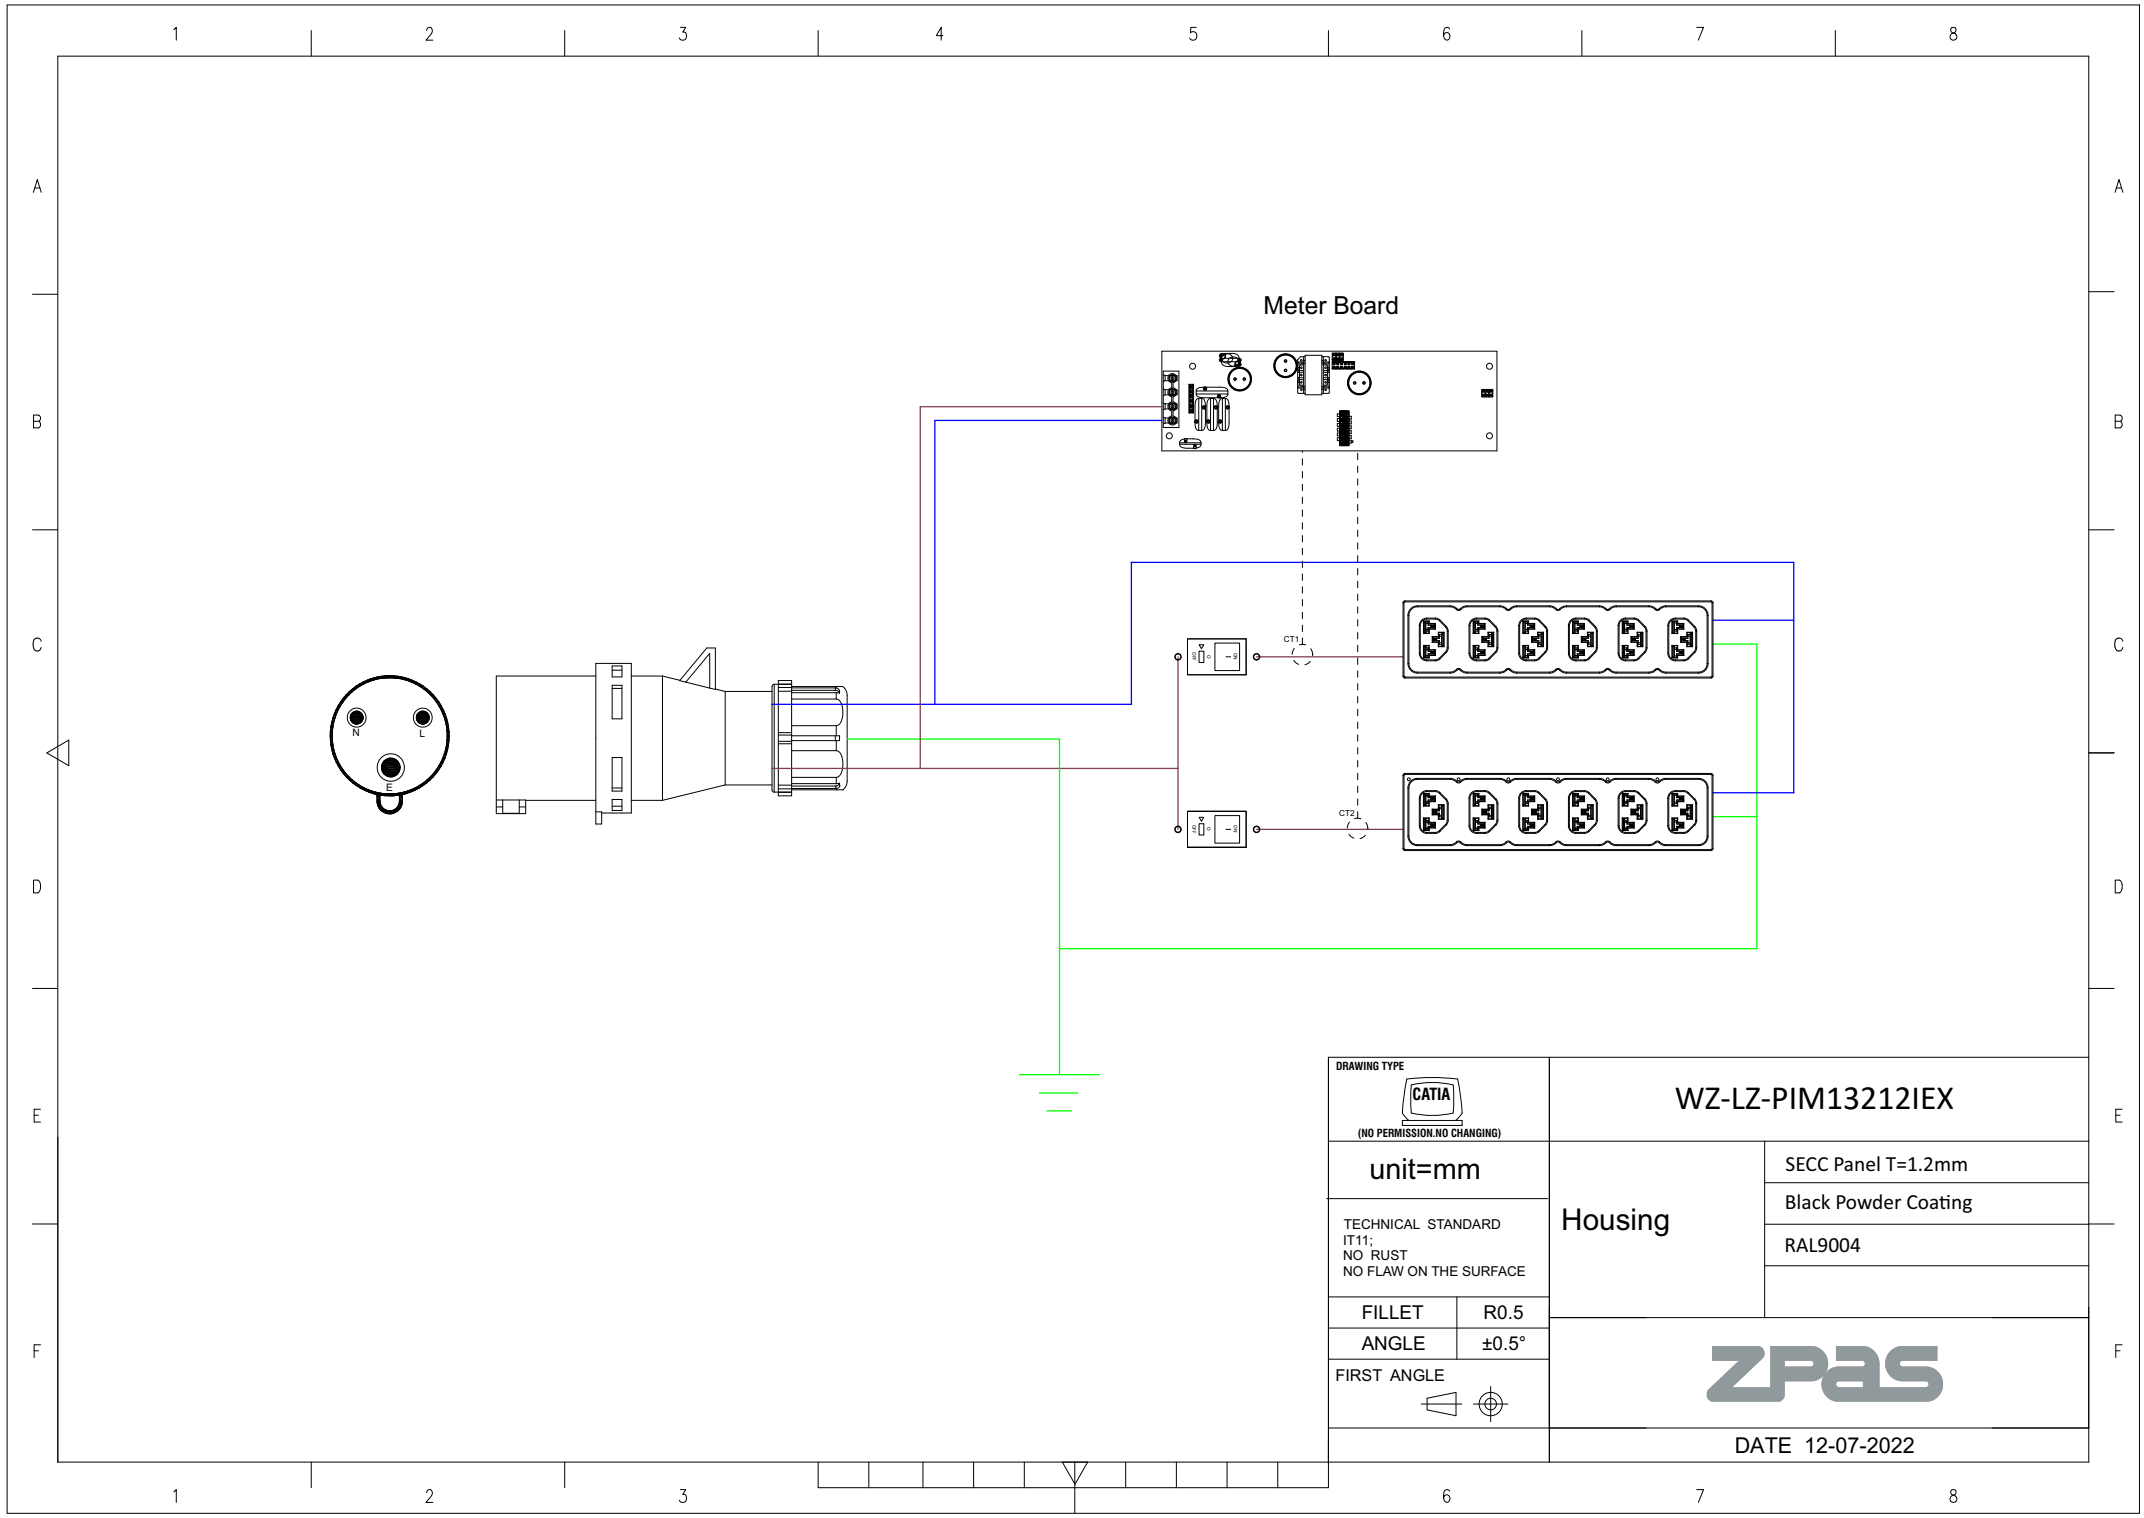

DRAWING TYPE		WZ-LZ-PIM13212IEX	
 (NO PERMISSION.NO CHANGING)		Housing	SECC Panel T=1.2mm
unit=mm			Black Powder Coating
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE			RAL9004
FILLET	R0.5	ZPAS	
ANGLE	±0.5°		
FIRST ANGLE			
		DATE 12-07-2022	