

SZB IT Server Cabinet 42 U, 800 x 1000 mm


Catalogue number: W-IT-428010-45AA-2-011

ZPAS**PRODUCT DESCRIPTION**

Cabinet for ICT applications based on a bolted frame. Static load capacity verified by external testing at 1500 kg.

Functionality

- 71 mm wide cable openings in the top and bottom plates allow to put through the power cords with three-phase plug.
- Ventilation perforation in the top plate.
- All openings in the top and bottom plates blanked with knock-out blanking plates.
- U-marking on the mounting profiles.
- Maximum opening angle for front and rear door – 270°.
- Door opening direction can be changed.
- Possibility to put the cabinet directly on the floor (no protruding elements under the cabinet).
- Adaptation for bying the cabinets in the rows and Data Box creation (cold/hot aisle).
- Three-point locking system for cabinet doors.
- Doors with optimal perforation clearance of 80%.
- Adapted to a dense installation of active hardware.

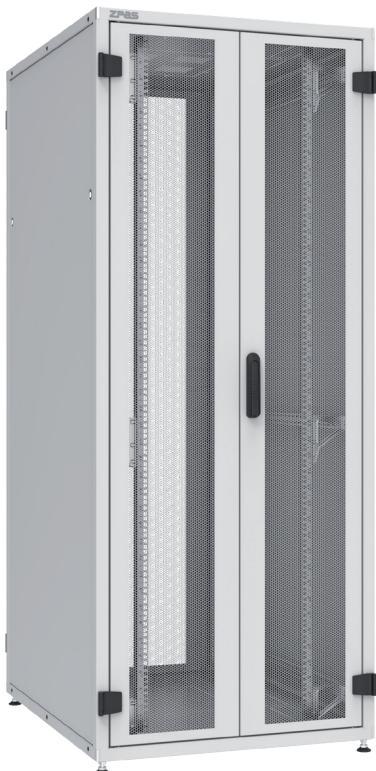**CONFIGURATION**

- Bolted frame (bottom plate, top plate, four posts).
- Front single-leaf perforated metal door.
- Rear double-leaf perforated metal door.
- Two solid metal side panels with single-point locks.
- Two pairs of 19" mounting profiles, type STANDARD.
- Earthing bar.
- Door and side panels earthing conductors (not shown in photos).
- Four levelling feet.

TECHNICAL DATA**Material**

Frame, side panels, doors, mounting profiles, C-profiles – sheet steel.

Outriggers – zamak casting.

Protection degree

IP 20 in accordance with EN 60529.

Surface finishing

Frame, side panels, doors – powder paint, light grey (RAL 7035).


Mounting profiles, C-profiles – Al-Zn coated.

SZB IT Server Cabinet 42 U, 800 x 1000 mm


Catalogue number: W-IT-428010-45AA-2-011

ZPAS


A-A section





Front view

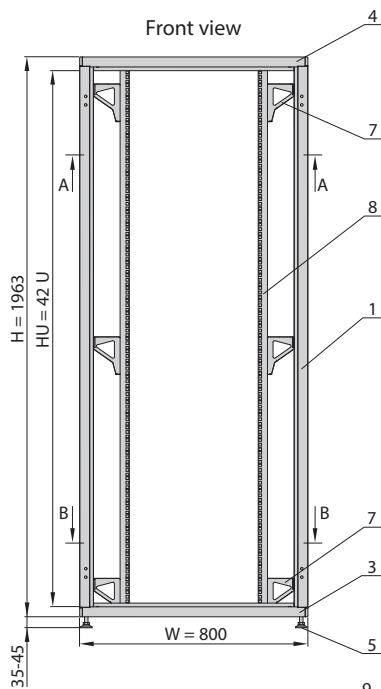

Side view

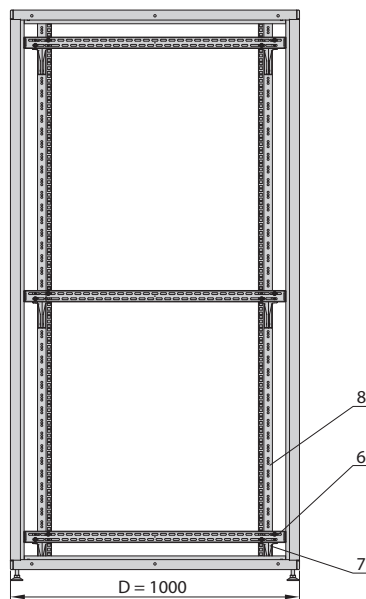


B-B section

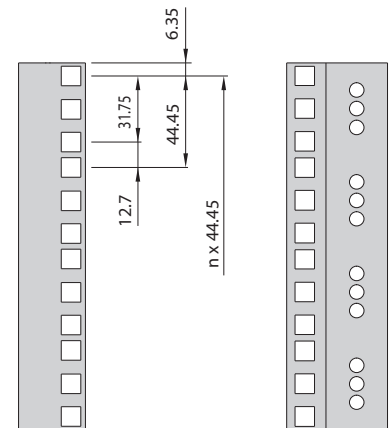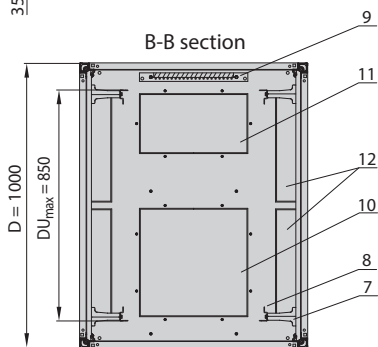**DESIGN**

1. Frame's post
3. Frame's bottom plate
4. Frame's top plate
5. Adjustable feet
6. C-profile for 15 mm deep mounting profiles
7. Outrigger
8. 19" mounting profile, type STANDARD, 15 mm deep
9. Earthing bar
10. Knock-out blanking plate 380 x 210 mm
10. Knock-out blanking plate 380 x 210 mm
12. Knock-out blanking plate 380 x 71 mm

Note:

The cabinet in the drawing is shown without any panels or doors.



19" mounting profile
type STANDARD
15 mm deep